

# F1960 Poly PEX 45° Elbow

Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
Tag	_____ PO# _____

## Specifications

Manufactured to the highest industry standards, Jones Stephens' F1960 cold expansion fittings provide precise, secure, and leak-free connections. Made with strong polymer material, F1960 cold expansion fittings are corrosion and chlorine/chemical resistant – making them a great fit for aggressive water environments. Approved for use with PEX-A piping. Can be used with F1960 PEX rings.

## Applications


Jones Stephens' F1960 Poly Pex Elbows are approved for use with commercial and residential non-potable water applications.

## Materials

PPSU. Polymer construction. Manufactured of premium grade resin with non-mixed blends.

## Certifications/Listings/Approvals

- ASTM F1960-2018a
- ASTM F877-2020
- NSF/ANSI/CAN 61-2022
- NSF/ANSI 14-2016a
- NSF/ANSI/CAN 372-2022
- CSA B137.5-2020

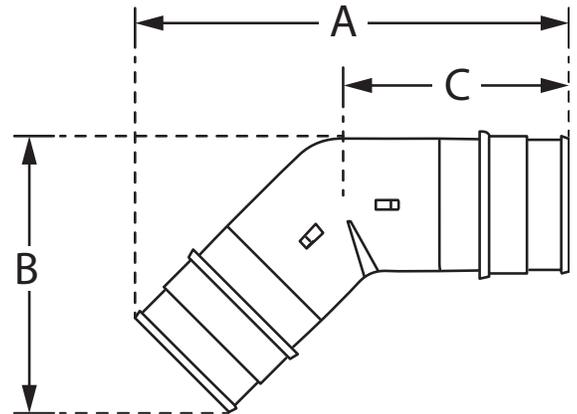

	ID	OD
F1960 Specified Dimensions	in (mm)	in (mm)
1/2" End Connection	.40(10.20)	.61(15.59)
3/4" End Connection	.61(15.60)	.87(22.10)
1" End Connection	.82(20.80)	1.11(28.10)
1-1/4" End Connection	.97(24.64)	1.36(35.54)
1-1/2" End Connection	1.08(27.43)	1.49(37.85)
2" End Connection	1.48(37.59)	2.08(52.82)

**PRODUCT OFFERING ON PAGE 2**

**Dimensions and Product Offering**

PART NO.	SIZE	A - IN (MM)	A TOLERANCE ±IN(MM)	B - IN (MM)	B TOLERANCE ±IN(MM)	C - IN (MM)	C TOLERANCE ±IN(MM)	WEIGHT - LBS (G)	WEIGHT TOLERANCE ±LBS (G)
<b>F76024</b>	1.50"	4.366 (110.900)	.01 (.25)	0.010 (0.254)	0.01 (0.25)	2.28 (58.00)	.01 (.25)	0.11 (50.10)	0.01 (2.27)
<b>F76025</b>	2.00"	5.579 (141.700)	.01 (.25)	0.010 (0.254)	0.01 (0.25)	2.87 (73.00)	.01 (.25)	0.29 (129.90)	0.01 (2.27)