


ALKALINE-MANGANESE DIOXIDE BATTERY PACK



Size: PXBP-STYLE-28110

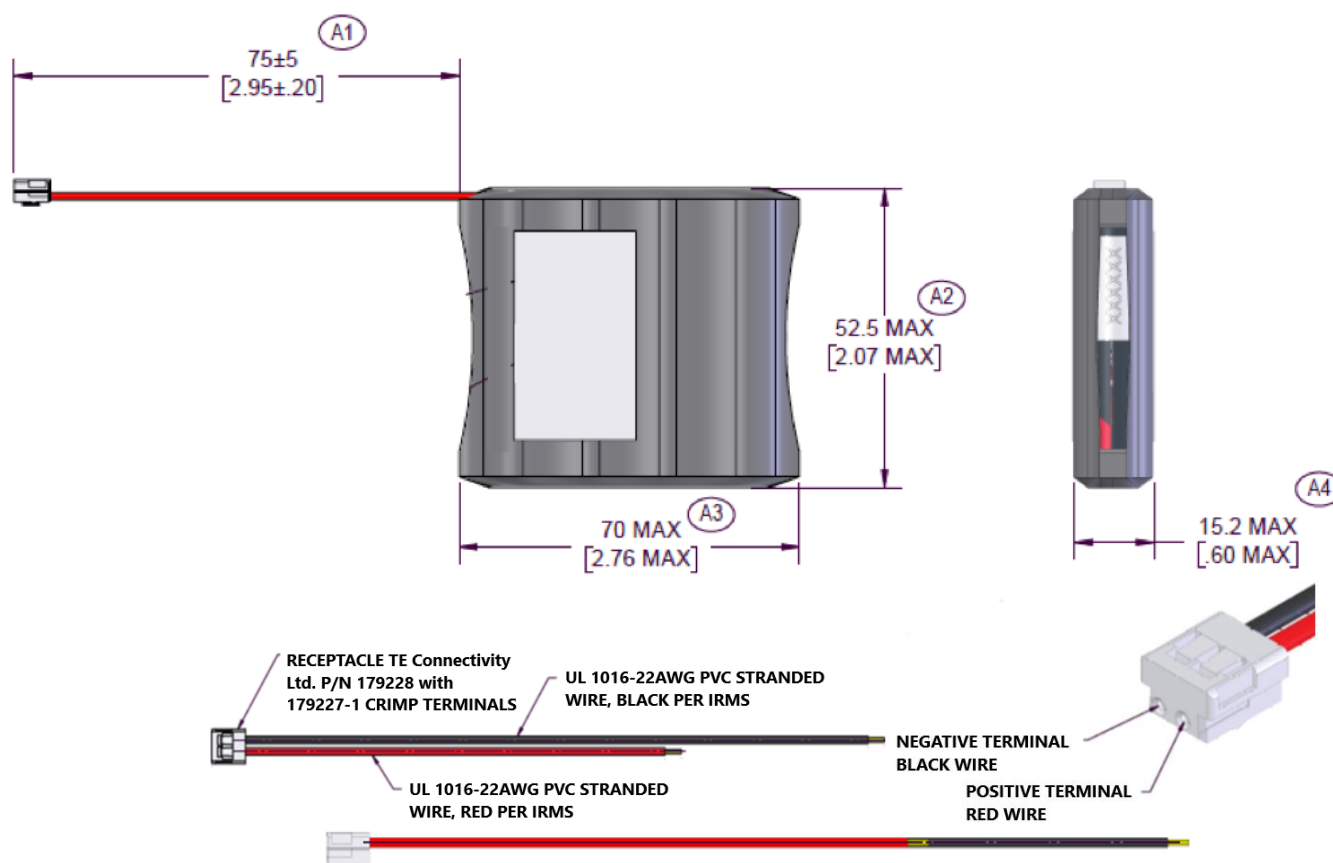

Dimensions (millimeter [inch])

KEY FEATURES

- Reliable Performance
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environmental standards:
 - Safety: IEC 60086-5
 - ANSI C 18.1M, Part-2
 - EU Battery Directive 2006/66/EC
 - EU REACH / California Prop 65

TYPICAL APPLICATIONS

- Keyless Door Locks
- IC Card Hotel Locks
- RF Card Locks
- Digital Door Locks

ELECTRICAL CHARACTERISTICS

- Nominal capacity (25 mA Cont., 3.2V cut-off) 3,112 mAh
- Typical Voltage (at + 20 °C) 6 V
- AC Impedance @ 1kHz 325 mΩ



PHYSICAL CHARACTERISTICS

- Typical weight 105 g (3.7 oz)
- Typical volume 40.5 cm³ (2.5 in³)
- Terminals Amp 179228-2, 179227-1

OPERATING & STORAGE CONDITIONS

- Operating temperature range -20°C to 54°C (-4°F to 130°F)
- Recommended Storage (storage area should be clean, cool, dry and ventilated) 5°C to 30°C (41°F to 86°F)

TYPICAL PERFORMANCE

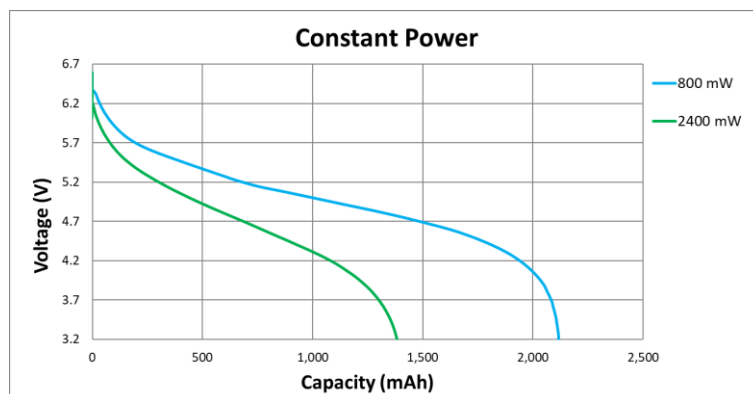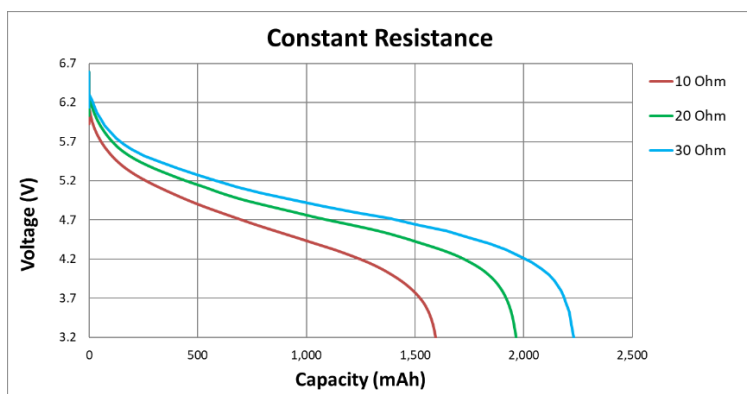

PROCELL®
 PROFESSIONAL BATTERIES
 Procell Professional Batteries
 Berkshire Corporate Park
 Phone: 1-877-277-6235 (Toll-free)
www.procell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Procell for the latest information.

