# AquaStat

#### **Specifications**

Description: Thermostatic Switch Type: Bi-metallic Disc, Snap acting

Enclosure: Environmentally Sealed



# Mounting:

Clip on mount for 1/2" I.D. copper tube (5/8" O.D.) Clip on mount for 3/4" I.D. copper tube (7/8" O.D.)

### Contact Rating:

10 amp @ 120 VAC 60 Hz resistive 5 amp @ 240 VAC 60 Hz resistive

# Temperature Rating:

Low Temp Model

105+5°F (40+2°C) Pump switches off 85+6°F (29+3°C) Pump switches on

High Temp Model


115+5°F (46+2°C) Pump switches off 105+5°F (40+2°C) Pump switches on

#### Leads:

2 leads, AWG 18, 14"

12", black insulation, silicon or epoxy overmold 1/2" STRIP LENGTH

Application: Clip-on thermostatic control for the UP Circulators

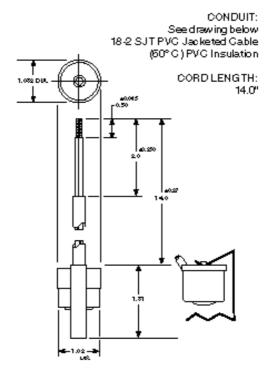

NOTE: All dimensions are in inches.

<sup>\*</sup>Temperatures indicated are at pipe surface.