

## Sentinel Mark II® Thermostatic Shower Valve

### MODELS:

- CPV-T2: Thermostatic Shower Valve  
Sweat & Thread Connections
- CPV-T2-PXC: Thermostatic Shower Valve  
PEX F1807 Crimp Inlet Connections
- CPV-T2-PXE: Thermostatic Shower Valve  
PEX F1960 Cold-Expansion Inlet Connections

### FEATURES:

- Brass body construction
- Four port valve with sweat & thread, PXC or PXE inlet connections (depending on model), and sweat & thread shower and tub outlets
- Thermostatic element and built-in check stops
- Blends hot and cold water to ensure constant and safe temperature thus preventing scalding via shuttling thermostatic element
- Adjustable temperature limit stop to control maximum temperature setting
- Integral stops allow water shut off for servicing valve
- Supports back-to-back installation
- Includes rough-in template and 1/2" pipe cap
- Certified against ASSE 1016 to perform at flow rates as low as 1.35 GPM

### TRIM OPTIONS:

- |              |               |
|--------------|---------------|
| • CPT-1000-P | • CPT-10000-P |
| • CPT-1001   | • CPT-24000   |
| • CPT-3001   | • CPT-25001   |
| • CPT-7000-P | • CPT-25003   |
| • CPT-8000-P | • CPT-27000   |
| • CPT-8001-P |               |

### STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- ASSE 1016 certified

### WARRANTY:

Visit [speakman.com](http://speakman.com) for full product warranty information


- 5 Year Limited Warranty (commercial)
- 5 Year Limited Warranty (residential)



CPV-T2



CPV-T2-PXC

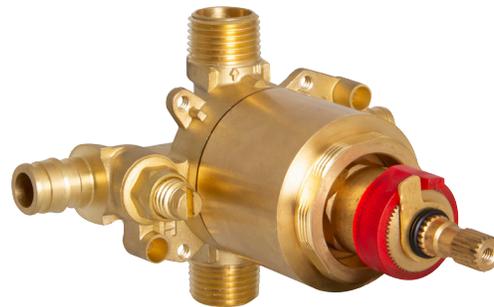

CPV-T2-PXE


1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. For ADA mounting locations, consult ADAAG, ANSI A117.1, and state regulations.

Architect/Engineer Approval Space:


P: 800-537-2107  
 F: 800-977-2747  
 W: WWW.SPEAKMAN.COM  
 R: 04-JANUARY 2022

## Sentinel Mark II® Thermostatic Shower Valve


### CPV-T2

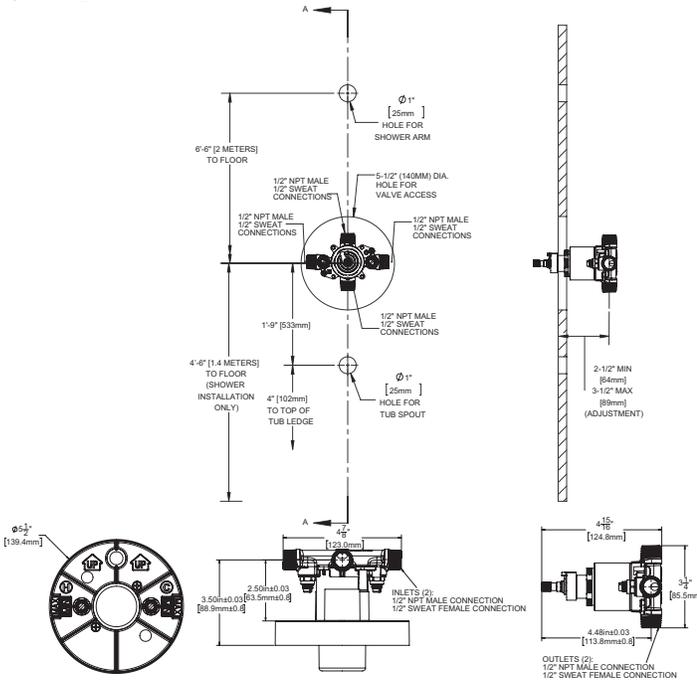

### CPV-T2 -PXC

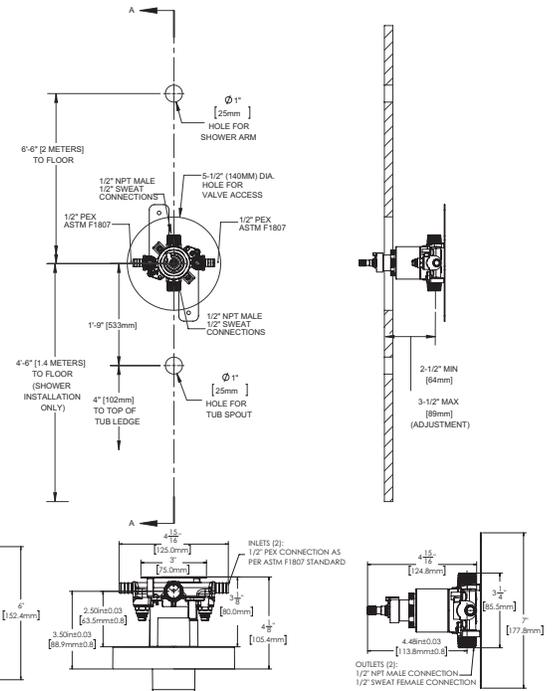

### CPV-T2-PXE

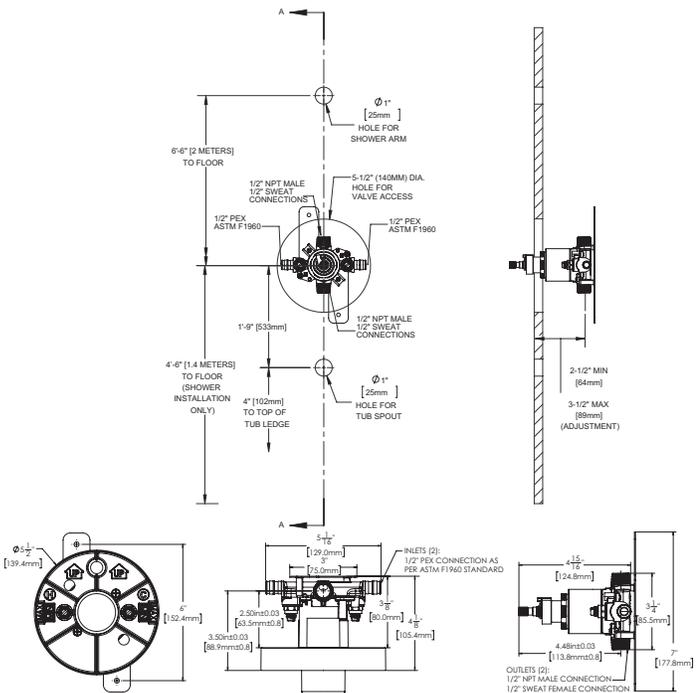

1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. For ADA mounting locations, consult ADAAG, ANSI A117.1, and state regulations.

Architect/Engineer Approval Space:

P: 800-537-2107  
 F: 800-977-2747  
 W: WWW.SPEAKMAN.COM  
 R: 04-JANUARY 2022