

Combi1® TTW®

Residential Power Vent Combi1® TTW® Gas Water Heater System



Photo is of
C-SW2-TW50T10FBN

FEATURING:



The Combi1® TTW® FVIR Defender Safety System® Models Feature (50T model, only):

- **Advanced ScreenLok® Technology Flame Arrestor Design**—Flame arrestor is designed to prevent ignition of flammable vapor outside of the water heater.
- **Flammable Vapor Sensor**—Electronic sensor prevents burner operation if flammable vapors are detected. The sensor will also prevent operation if there is ongoing flammable vapors burning inside the combustion chamber.
- **Maintenance Free**—Regular cleaning of air inlet openings or flame arrestor is not required under normal conditions.
- **Sight Window**—Offers a view of the pilot and burner operation.

All Combi1® TTW® Models Feature

- **Powerful Blower Motor**—Exclusively featuring the AquaVENT MAX™ from Fasco™ is the quietest blower motor in the industry. This new blower is a lower profile than previous versions and features a more robust electrical connection
 - 10 Foot (3m) Power Cord—Included (120 VAC).
- **Horizontal and Vertical Venting**—With 3" (76mm) or 4" (102mm) PVC, ABS or CPVC (Maximum equivalent vent lengths on reverse side).
- **High Altitude Ready**—Water Heaters designed and certified for installations up to 10,100 feet (3078m) out of the box. No conversion kit required.
- **Internal Single Wall Heat Exchanger**—1½" (38mm) O.D. glass coated (Vitraglas®) steel coil.
 - 1" (25mm) NPT Solar Collector Supply and Return Connections.
- **Low Heat Exchanger Head Loss**—Up to 10 GPM (38L) flow, with less than 5ft. (1.5m) of head loss. Greatly reduces the required pump size for heat exchange.
- **Bradford White ICON System®**—Intelligent gas control with spark to pilot ignition system eliminates the constant burning pilot. This results in savings of pilot gas during stand by periods (120 VAC).
 - **Enhanced Performance**—Proprietary algorithms provide enhanced First Hour Rating and tighter temperature differential.
 - **Advanced Temperature Control System**—Microprocessor constantly monitors and controls burner operation to maintain accurate water temperature levels.
 - **Intelligent Diagnostics**—An exclusive green LED light prompts the installer during start-up and provides ten different diagnostic codes to assist in troubleshooting.
- **Factory-Installed Hydrojet® Total Performance System**—Sediment reducing device that also increases first hour rating of hot water while minimizing temperature build-up in tank.
- **Vitraglas® Lining**—An exclusively engineered enamel formula that provides superior tank protection from the highly corrosive effects of hot water. This formula (Vitraglas®) is fused to the steel surface by firing at a temperature of over 1600°F (871°C).
- **Insulation System**—2" (51mm) Non-CFC foam insulation covers the sides and top of the tank, reducing heat loss. This results in less energy consumption, improved efficiencies, and jacket rigidity.
- **Pedestal Base.**
- **Water Connections**—¾" (19mm) NPT factory-installed true dielectric fittings extend water heater life and simplify water line connections.
- **Two Protective Anode Rods.**
- **T&P Relief Valve**—Installed.
- **Low Restrictive Brass Drain Valve**—Durable tamper proof design.
- **Thermostatic Mixing Valve (ASSE Approved)**—Included.

10-Year Limited Tank and Heat Exchanger Warranties / 6-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada, and Puerto Rico. Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater.

Residential Power Vent Combi¹® TTW[®] Gas Water Heater System

Combi¹® TTW[®] Models

NATURAL GAS AND LIQUID PROPANE GAS

Meet or exceed ASHRAE 90.1 (latest edition), C.E.C. Listed
80% Recovery Efficiency



Model Number	Rated Nominal Volume		Nat. BTU/Hr. Input	LP BTU/Hr. Input	Recovery 90°F Rise*				A Floor to Top of Blower in.	B Jacket Dia. in.	C Vent Size in.	D Floor to T&P Conn. in.	E Floor to Gas Conn. in.	F Floor to Exchanger Inlet in.	G Floor to Exchanger Outlet in.	H Floor to Heater Top in.	J Floor to Water Conn. in.	K Depth in.	Approx. Shipping Weight lbs.
	U.S. Gal.	Imp. Gal.			U.S. GPH	Nat. Imp. GPH	U.S. GPH	Imp. GPH											
C-SW2-TW50T10FBN	45	38	67,000	60,000	72	60	65	54	63 ^{3/16}	22	3 or 4	50%	11%	31%	50	56%	60%	26%	243
C-SW2-TW75T10BN	72	61	76,000	75,500	82	69	81	67	66 ^{1/2}	26	3 or 4	53	15	34%	53	60%	64%	31	313

Model Number	Rated Nominal Volume		Nat. kW Input	LP kW Input	Recovery 50°C Rise*		A Floor to Top of Blower mm.	B Jacket Dia. mm.	C Vent Size mm.	D Floor to T&P Conn. mm.	E Floor to Gas Conn. mm.	F Floor to Exchanger Inlet mm.	G Floor to Exchanger Outlet mm.	H Floor to Heater Top mm.	J Floor to Water Conn. mm.	K Depth mm.	Approx. Shipping Weight kg.
	Liters				Liters/Hour	LP Liters/Hour											
C-SW2-TW50T10FBN	170		19.6	17.5	272	246	1621	559	76 or 102	1273	298	786	1270	1432	1543	679	110
C-SW2-TW75T10BN	272		22.3	22.1	310	306	1684	660	76 or 102	1346	389	868	1549	1530	1632	787	142

Propane models feature a Titanium Stainless Steel propane burner. For Propane (LP) models change suffix "BN" to "SX".

* Based on manufacturers rated recovery efficiency.

120 VAC Required for Power Venting / 120 VAC, 60Hz., 3.1 Amperes.

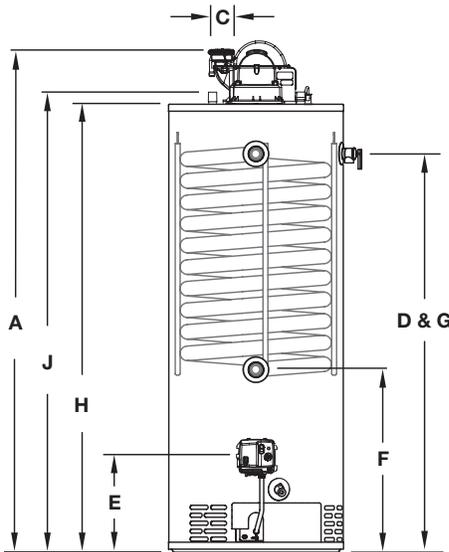

Heat Exchanger Head Loss		Heat Exchanger Head Loss	
GPM	Ft. of Hd. Loss	LPM	m of Hd. Loss
2	0.03	7.6	0.0091
5	0.20	18.9	0.0609
8	0.51	30.2	0.1554
10	0.80	37.9	0.2438
12	1.15	45.4	0.3505

	3" (76mm) Vent Pipe	4" (102mm) Vent Pipe
Max. Equivalent Length	†75 ft. †23.0m	†180 ft. †55.0m
Min. Equivalent Length	7 ft. 2.1m	15 ft. 4.6m
Number of 90° Elbows	1 70 ft. 21.3m 2 65 ft. 20.0m 3 60 ft. 18.3	1 175 ft. 53.3m 2 170 ft. 52.0m 3 165 ft. 50.3m

Subtract 5ft. (1.5m) for each additional 90° elbow.

† For high altitude installations, consult the installation instructions.

Heat Exchanger Values*

	140°F	60°C	120°F	49°C	100°F	38°C
Supply Temperature						
Return Temperature	120°F	49°C	100°F	38°C	80°F	27°C
Differential	20°F	11°C	20°F	11°C	20°F	11°C
Flow Rate (50 Gal.)	4.1 GPM	15.5 LPM	4.6 GPM	17.4 LPM	4.6 GPM	17.4 LPM
Net Output (50 Gal.)	35,000 BTU/Hr.	10.3kW	39,500 BTU/Hr.	11.6kW	39,500 BTU/Hr.	11.6kW
Flow Rate (75 Gal.)	4.1 GPM	15.5 LPM	5.6 GPM	21.2 LPM	5.6 GPM	21.2 LPM
Net Output (75 Gal.)	35,000 BTU/Hr.	10.3kW	47,500 BTU/Hr.	14.0kW	47,500 BTU/Hr.	14.0kW

* These values were obtained using 180°F (82°C) stored tank temperature.

Net Output is the space heating capacity based on normal piping and pickup allowance of 15%.

Actual values may vary based on circulator flow rate, number of zones, water and space heating demands. Numbers subject to change.

General

Meets NAECA Requirements.

All gas water heaters are certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa). All potable water connections are 3/4" (19mm) NPT on 11" (279mm) centers. All heat exchanger connections are 1" (25mm) NPT. All gas connections 1/2" (13mm). All models design certified by CSA International (formerly AGA/CGA), ANSI Z21.10.1 and or 10.3 and peak performance rated.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

Suitable for Water (Potable) Heating and Space Heating.

Toxic chemicals, such as those used for boiler treatment, shall NEVER be introduced into the potable water side. The potable side of this unit may NEVER be connected to any existing heating system or component(s) previously used with a non-potable water heating appliance. The heat exchanger side of the unit may be used in space heating applications.

— BRADFORD WHITE IS —



Sales: 800-523-2931 ■ Fax 215-641-1612

24/7 Technical Support: 800-334-3393 ■ Email techserv@bradfordwhite.com

Products made by Bradford White are manufactured in the United States using the finest raw materials and components from around the world.

Built to be the Best