

TTW Power Vent Residential Gas Water Heater

Features

- **Defender Safety System**^{®*}—Designed to be the safest & most reliable flammable vapor ignition resistant system in the industry with a proven track record since 2003. Featuring an advanced ScreenLok[®] technology flame arrestor design, flammable vapor sensor, sight window, and designed to be maintenance-free.
- **Bradford White ICON System**[®]—Intelligent gas control that eliminates constant burning pilot, saving gas during standby periods (120 VAC). Proprietary algorithms provide tighter temperature differential and consistent water temperature levels up to 160°F (70°C). LED light indicates pilot function or operation status/service required.
- **Vitraglas[®] Lining with Microban[®]**—An exclusively engineered enamel formula that provides superior tank protection from the corrosive effects of water; and with Microban[®] antimicrobial product protection to help prevent the growth of bacteria, mold and mildew on the surface of the tank lining.
- **Hydrojet[®] Total Performance System**—Sediment reducing device that also increases first hour delivery of hot water while minimizing temperature build-up in tank.

Additional Details

- **AquaVENT MAX[™] from Fasco[™]**: The industry's quietest blower motor with a lower profile and robust electrical connection. Includes 10-foot (3m) power cord (120 VAC).
- **Horizontal and Vertical Venting**—Designed for installations unsuitable for atmospheric units. Exhaust gases vented under positive pressure through roof or wall using PVC, ABS, CPVC, or Polypropylene.
- **High Altitude Ready**—Water Heaters designed and certified for installations up to 10,100 feet (3078m) out of the box. No conversion kit required.
- **Insulation System**—Non-CFC foam covers the tank, reducing heat loss, energy consumption, and improves efficiency and jacket rigidity.
- **Water Connections**—NPT factory-installed dielectric waterway with heat traps.
 - **¾" (19mm) NPT Side Connections**—(RG2PV50H6N, RG1PV55H6N, and RG2PV75H6N only).
- **Factory-Installed Heat Traps**—Design incorporates a flexible disk that reduces heat loss in piping and eliminates the potential for noise generation.
- **Protective Anode Rod**—Provides added protection against corrosion for long-term, trouble-free service (RG1PV55H6N has 2).
- **T&P Relief Valve**—Installed.
- **Thermostatic Mixing Valve (ASSE Approved)**— (RG1PV55H6N only).
- **Low Restrictive Brass Drain Valve**—Durable tamper proof design.
- **NOx Emissions**—Less than 40 ng/J.

*Excluding RG1PV55H6N & RG2PV75H6N



RG1PV50S6N

Bradford White
DEFENDER
Safety System

BRADFORD WHITE
ICON
System

VITRAGLAS
ANTICORROSION PROTECTION SINCE 1981

+

MICROBAN

Hydrojet



6 or 10-Year Limited Tank Warranties / 6-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada, and Puerto Rico. See complete copy of the warranty included with the heater for limitations..

Microban[®] antimicrobial product protection helps prevent the growth of bacteria, mold and mildew that may affect the product. The built-in antimicrobial properties do not protect users or others from disease-causing organisms. Microban[®] is a registered trademark of Microban Products Company.

TTW Power Vent

Residential Gas Water Heater




SPECIFICATIONS

Model Number	Rated Nominal Volume		DOE Rated Storage Volume Gal.	BTU/Hr. Input	LP BTU/Hr. Input	First Hour Rating Gal.	Uniform Energy Factor	Recovery at 90°F Rise*				Model Number	Rated Nominal Volume		DOE Rated Storage Volume Liters	kW Input	LP kW Input	First Hour Rating Liters	Uniform Energy Factor	Recovery at 50°C Rise*	
	U.S. Gal.	Imp. Gal.						U.S. GPH	Imp. GPH	U.S. GPH	LP GPH		U.S. GPH	Imp. GPH						U.S. GPH	LP GPH
RG1PV40S6N	40	33	38	40,000	38,000	75	0.68	43	36	41	34	RG1PV40S6N	151	144	144	11.1	11.1	284	0.68	163	155
RG1PV50S6N	50	42	48	40,000	38,000	78	0.69	44	37	42	35	RG1PV50S6N	189	182	182	11.7	11.1	295	0.69	167	159
RG2PV40S6N	40	33	38	40,000	38,000	75	0.72	44	36	41	35	RG2PV40S6N	151	144	144	11.7	11.1	284	0.72	165	157
RG2PV50S6N	50	42	48	40,000	38,000	78	0.72	44	37	44	37	RG2PV50S6N	189	182	182	11.7	11.1	295	0.72	167	167
RG2PV40T6N	40	33	38	40,000	40,000	78	0.72	43	35	40	34	RG2PV40T6N	151	144	144	11.7	11.7	295	0.72	161	153
RG2PV50T6N	50	42	48	40,000	40,000	75	0.72	44	36	44	36	RG2PV50T6N	189	182	182	11.7	11.7	284	0.72	165	165
RG2PV50H6N	48	42	46	65,000	58,000	116	0.68	70	58	62	52	RG2PV50H6N	182	174	174	19.1	17.0	440	0.68	265	235
RG1PV55H6N	55	46	55	78,000	76,000	116	0.68	84	70	82	68	RG1PV55H6N	208	208	208	22.9	22.3	440	0.68	318	309
RG2PV75H6N	75	62	72	76,000	75,500	121	0.69	82	68	81	67	RG2PV75H6N	284	235	235	22.3	22.1	459	0.69	310	307

Model Number	A Floor to Top of Blower in.	B Jacket Dia. in.	C Vent Size in.	D Floor to T&P Conn. in.	E Floor to Gas Conn. in.	F Floor to Top of Heater in.	G Floor to Water Conn. in.	H Depth in.	J C/L of Water Conn. in.	K Floor to Space Heating Inlet in.	L Floor to Space Heating Outlet in.	M Water Conn. NPT in.	R Space Heating Conn. Size in.	S Gas Conn. Size in.	Approx. Shipping Weight lbs.
RG1PV40S6N	55 ⁷ / ₁₆	20	2, 3, or 4	40	11 ¹ / ₂	46 ¹ / ₂	49	25 ¹⁵ / ₁₆	8	N/A	N/A	3/4	N/A	1/2	140
RG1PV50S6N	56 ³ / ₈	22	2, 3, or 4	40 ⁵ / ₈	11 ¹ / ₂	48 ³ / ₁₆	50 ¹ / ₂	27 ³ / ₁₆	8	N/A	N/A	3/4	N/A	1/2	166
RG2PV40S6N	55 ⁷ / ₁₆	22	2, 3, or 4	40 ¹ / ₈	11 ¹ / ₂	47 ³ / ₁₆	49	27 ³ / ₁₆	8	N/A	N/A	3/4	N/A	1/2	142
RG2PV50S6N	56 ⁷ / ₁₆	24	2, 3, or 4	40 ⁵ / ₈	11 ¹ / ₂	48 ³ / ₁₆	50 ¹ / ₂	28 ⁷ / ₈	8	N/A	N/A	3/4	N/A	1/2	168
RG2PV40T6N	65	20	2, 3, or 4	49 ¹¹ / ₁₆	11 ¹ / ₂	56 ³ / ₄	58	26 ¹ / ₈	8	N/A	N/A	3/4	N/A	1/2	146
RG2PV50T6N	65 ¹³ / ₁₆	22	2, 3, or 4	50 ⁹ / ₁₆	11 ¹ / ₂	57 ⁹ / ₁₆	58	27 ³ / ₁₆	8	N/A	N/A	3/4	N/A	1/2	173
RG2PV50H6N	64 ⁷ / ₁₆	22	3 or 4	49 ⁷ / ₈	11 ¹ / ₂	56 ³ / ₄	57 ³ / ₄	26 ¹⁵ / ₁₆	11	13 ³ / ₈	49 ⁷ / ₈	3/4	3/4	1/2	187
RG1PV55H6N	62 ¹ / ₂	22	3 or 4	47 ¹⁵ / ₁₆	11 ¹ / ₂	54 ³ / ₄	56	27 ³ / ₁₆	7 ³ / ₄	13 ³ / ₈	47 ¹⁵ / ₁₆	3/4	3/4	1/2	219
RG2PV75H6N	67 ⁷ / ₁₆	26	3 or 4	51 ¹⁵ / ₁₆	13 ¹⁵ / ₁₆	59 ¹¹ / ₁₆	60 ³ / ₄	30 ¹¹ / ₁₆	11	16 ¹¹ / ₁₆	51 ¹⁵ / ₁₆	3/4	3/4	1/2	260

Model Number	A Floor to Top of Blower mm.	B Jacket Dia. mm.	C Vent Size mm.	D Floor to T&P Conn. mm.	E Floor to Gas Conn. mm.	F Floor to Top of Heater mm.	G Floor to Water Conn. mm.	H Depth mm.	J C/L of Water Conn. mm.	K Floor to Space Heating Inlet mm.	L Floor to Space Heating Outlet mm.	M Water Conn. NPT mm.	R Space Heating Conn. Size mm.	S Gas Conn. Size mm.	Approx. Shipping Weight kg.
RG1PV40S6N	1408	508	51, 76, or 102	1016	292	1181	1245	659	203	N/A	N/A	19	N/A	13	64
RG1PV50S6N	1432	559	51, 76, or 102	1032	292	1224	1283	691	203	N/A	N/A	19	N/A	13	75
RG2PV40S6N	1408	559	51, 76, or 102	1019	292	1199	1245	691	203	N/A	N/A	19	N/A	13	64
RG2PV50S6N	1408	610	51, 76, or 102	1032	292	1244	1283	733	203	N/A	N/A	19	N/A	13	76
RG2PV40T6N	1651	508	51, 76, or 102	1262	292	1441	1473	664	203	N/A	N/A	19	N/A	13	66
RG2PV50T6N	1672	559	51, 76, or 102	1284	292	1462	1473	691	203	N/A	N/A	19	N/A	13	78
RG2PV50H6N	1637	559	76 or 102	1267	292	1441	1467	684	279	340	1267	19	19	13	85
RG1PV55H6N	1588	559	76 or 102	1218	292	1391	1422	691	197	340	1218	19	19	13	99
RG2PV75H6N	1713	660	76 or 102	1319	354	1516	1543	779	279	424	1319	19	19	13	118

Propane models feature a Titanium Stainless Steel propane burner. For Propane (LP) models change suffix "N" to "X". For 10 year models, change suffix from "6" to "10" (Not available on RG1PV55H6N). *Based on manufacturer's rated recovery efficiency. 120 VAC, 60Hz., 3.1 Amperes. Uniform Energy Factor and First Hour Rating is based on the latest AHRI directory listings.



RG2PV40S6N RG2PV50S6N RG1PV40S6N	RG1PV50S6N RG2PV40T6N RG2PV50T6N	2" (51mm) Vent Pipe	3" (76mm) Vent Pipe	4" (102mm) Vent Pipe	RG2PV50H6N RG1PV55H6N RG2PV75H6N	3" (76mm) Vent Pipe	4" (102mm) Vent Pipe
Max. Equivalent Length	†50 ft. †15.2m	†120 ft. †36.6m	†200 ft. †61.0m	Max. Equivalent Length	†75 ft. †23.0m	†180 ft. †55.0m	
Min. Equivalent Length	7 ft. 2.1m	15 ft. 4.6m	15 ft. 4.6m	Min. Equivalent Length	7 ft. 2.1m	15 ft. 4.6m	
Number of 90° Elbows	1 45 ft. 13.7m 2 40 ft. 12.2m 3 35 ft. 10.7m	115 ft. 35.0m 110 ft. 33.5m 105 ft. 32.0m	195 ft. 59.4m 190 ft. 58.0m 185 ft. 56.4m	Number of 90° Elbows	1 70 ft. 21.3m 2 65 ft. 20.0m 3 60 ft. 18.3m	175 ft. 53.3m 170 ft. 52.0m 165 ft. 50.3m	

Subtract 5ft. (1.5m) for each additional 90° elbow

† For high altitude installations, consult the installation instructions.


GENERAL:

Meets NAECA Requirements.

All gas water heaters are certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa). All water connections are 3/4" NPT (19mm). All gas connections 1/2" (13mm). All models design certified by CSA International, ANSI Z21.10.1 (except RG1PV55H6N and RG2PV75H6N = Z21.10.3) and peak performance rated.

Suitable for Water (Potable) Heating and Space Heating.

Toxic chemicals, such as those used for boiler treatment, shall NEVER be introduced into the potable side of this system. The potable side may NEVER be connected to any existing heating system or component(s) previously used with a non-potable water heating appliance.

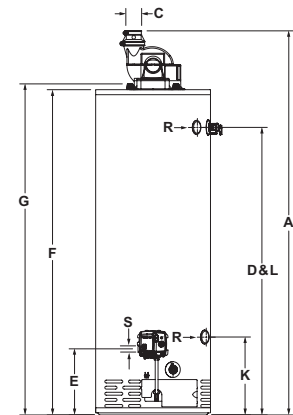

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.



Sales: 800-523-2931

24/7 Technical Support: 800-334-3393 • Email: TechServ@bradfordwhite.com

Products made by Bradford White are manufactured in America using the finest materials and components from around the world. ©2026, Bradford White Corporation, USA. All rights reserved.

— BRADFORD WHITE IS —



1261-0126