




Olympia Faucets
VALUE FOR BUILDERS

SPECIFICATION SHEET


P-1131B
Valve Series

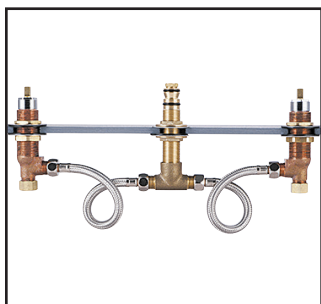

Two Handle Roman Tub Valve Set

- 1/2" IPS or Sweat Connections
- Quick Mount Connector
- Deck or Ledge Mount
- Ceramic Disc Cartridges
- 3-Hole 8" to 16" Installation
- Brass Plug
- 12" SS Flex Hose, Mud Guards Included

P-1131B Flow Rate (GPM) Vs Pressure (PSI) For Tub Port*

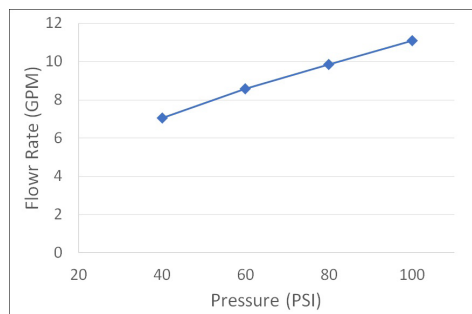

*Note: This information is provided for reference only. Actual Flow Rate may vary depending on installation and inlet pressures.



Olympia products are engineered and manufactured to meet the following standards and codes :
ASME A112.18.1-2018/CSA B125.1-18
IAPMO LISTED

Note: Cartridge operational at pressures 20 PSI to 100 PSI.

