




Washing Machine Kits

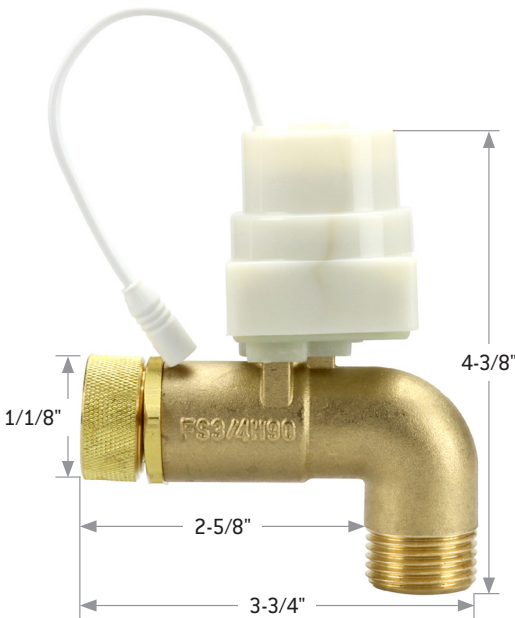

SPECIFICATIONS:

Furnish and install point-of-use leak detection with audible and visual alarm, plus automatic water shut-off system designed for residential and commercial buildings. Maintenance-free, auto-cycling motorized ball valves automatically shut off the water supply whenever appliance or hoses leak.

- Heavy duty standard port solid brass ball valve(s). Rated up to 140 PSI working pressure
- AB1953 & NSF 61 lead free complaint / ICC-ES Listed (PMG-1511)
- Complies with: IPC, IRC, UPC and the National Plumbing Code of Canada (NPC) code bodies
- Signal Outputs: 1 Normally Open, 24VDC / 2Amp
- Rated 32-212 degrees F
- Additional sensors may be added in series

Kit includes:

- Standard Port Motorized Ball Valves: CNC machined. Motor operates at 6VDC.
- 1.25 X 7.5 inch, double sided water sensor
- Control Unit mounts with screws or Velcro (included).
- UL listed class 2 wall adaptor, 115AC/9VDC
- Optional Power Sources: (4) AA Batteries (not included)

PRODUCT	MODEL	DESCRIPTION	UNITS/CASE
20010	FS34H90	Washing Machine Kit 3/4" 90deg, Hot & Cold Valves	12
20011	FS34H	Washing Machine Kit 3/4" Straight, Hot & Cold Valves	12
Replacement Valves Only			
20082	FSAV34H90	Valve Only 3/4" 90deg, Washing Machine	1
20083	FSAV34H	Valve Only 3/4" Straight, Washing Machine	1



500 Distribution Parkway, Collierville, TN 38017 • Phone: 800-888-8312 • Fax: 901-853-5008 • www.ipscorp.com