

# KALLISTA®

## Pinna Paletta® by Laura Kirar Wall-Mount Sink Faucet, Lever Handles P24910-BAF

### Features

- High-quality solid-brass construction for durability and reliability
- Spout reach is 6-1/8" (156 mm)
- Laminar flow
- Includes soft-touch drain
- Three-hole installation
- 1.2 gpm (4.5 lpm) maximum flow rate
- Required rough-in sold separately

### Required Products/Accessories

For wall-mount installation  
P29304-00 Rough-In

### Recommended Products/Accessories

P24901-SNW Sink Faucet, Low Spout, Lever Handles  
P25336-SNW Towel ring  
P24936-SNW Hook



**ADA** **CSA B651** **OBC**

### Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 61  
NSF/ANSI/CAN 372  
All applicable US Federal and State material regulations  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC  
IAPMO Certification

### KALLISTA® Five-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	BAF	Brushed French Gold

1-888-4-KALLISTA (1-888-452-5547)



Kallista reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kallista.com](http://www.kallista.com).

12-23-2023 21:41 - US/CA/CN/MX/GB

# KALLISTA®

## Pinna Paletta® by Laura Kirar Wall-Mount Sink Faucet, Lever Handles P24910-BAF

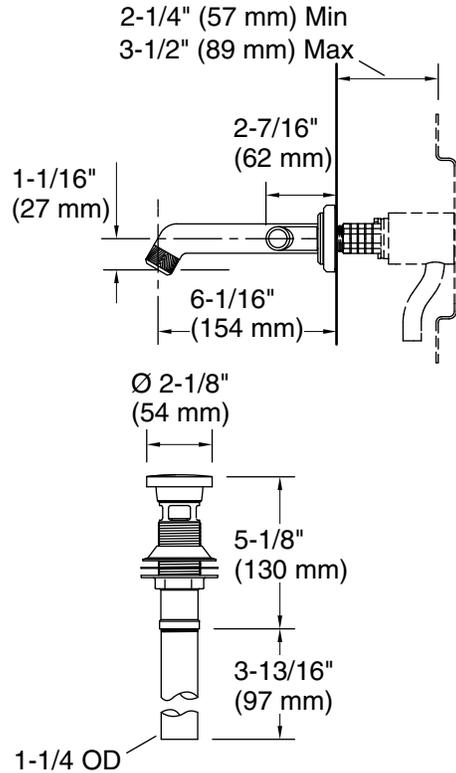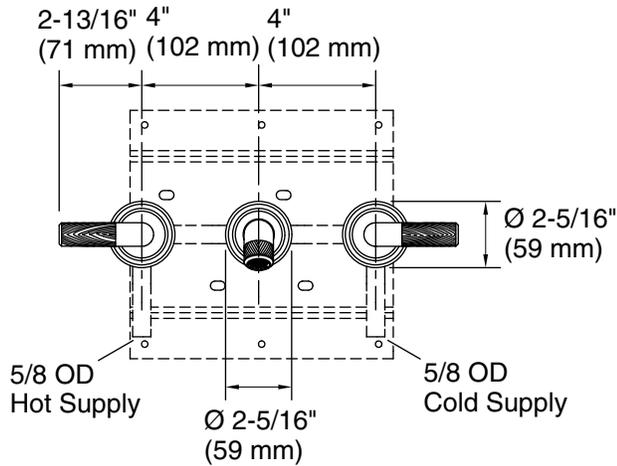

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

Drain with overflow: Yes

#### Spout:

Spout reach: 6-1/8" (156 mm)

### Notes

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.