
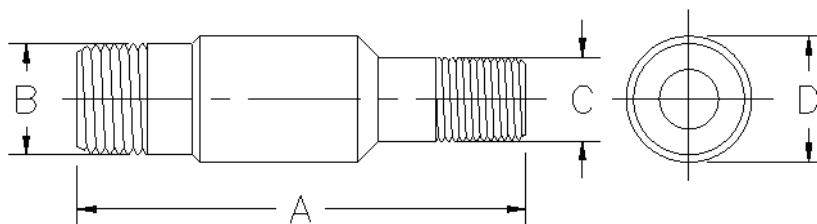


Stainless Steel Swage Nipples

Threaded Both Ends

CAMCO

ASTM A234, F304/F304L or F316/316L, MSS SP-95

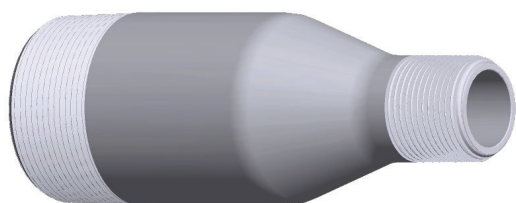

Combination Of End Styles Available

Pipe Size	A	B	C	D	Approx. Wt.			
					Std	XH	160	XXH
1/4 X 1/8	2.250	0.540	0.405	0.562				
3/8 X 1/8	2.500	0.675	0.405	0.750				
3/8 X 1/4			0.540					
1/2 X 1/4	2.750	0.840	0.540	0.875				
1/2 X 3/8			0.675					
3/4 X 1/4			0.540					
3/4 X 3/8	3.000	1.027	0.675	1.062				
3/4 X 1/2			0.840					
1 X 1/4			0.540					
1 X 3/8			0.675					
1 X 1/2	3.500	1.315	0.840	1.315				
1 X 3/4			1.050					
1-1/4 X 1/4			0.540	1.660				
1-1/4 X 3/8			0.675					
1-1/4 X 1/2	4.000	1.660	0.840	1.750				
1-1/4 X 3/4			1.050					
1-1/4 X 1			1.315					
1-1/2 X 3/8			0.675	1.900				
1-1/2 X 1/2			0.840					
1-1/2 X 3/4	4.500	1.900	1.050	2.000				
1-1/2 X 1			1.315					
1-1/2 X 1-1/4			1.660					
2 X 1/4			0.540					
2 X 3/8			0.675					
2 X 1/2			0.840					
2 X 3/4	6.500	2.375	1.050	2.375				
2 X 1			1.315					
2 X 1-1/4			1.660					
2 X 1-1/2			1.900					


Continued on the next page

Stainless Steel Swage Nipples

Threaded Both Ends

CAMCO

ASTM A234, F304/F304L or F316/316L, MSS SP-95

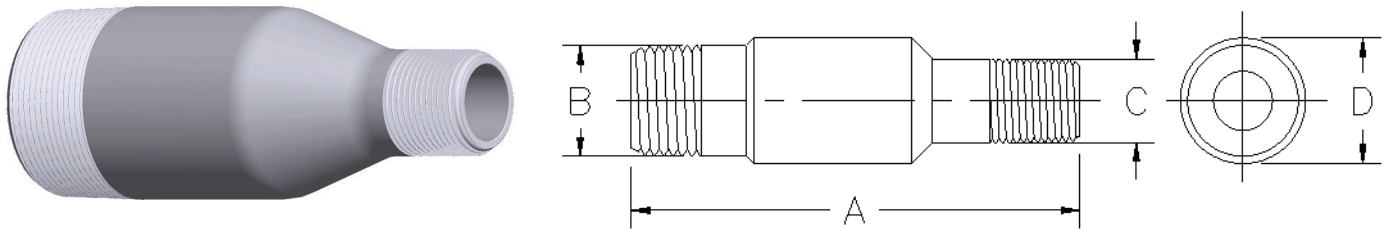

Combination Of End Styles Available

Pipe Size	A	B	C	D	Approx. Wt.			
					Std	XH	160	XXH
2-1/2 X 1/2			0.840					
2-1/2 X 3/4			1.050					
2-1/2 X 1	7.000	2.875	1.315	2.875				
2-1/2 X 1-1/4			1.660					
2-1/2 X 1-1/2			1.900					
2-1/2 X 2			2.375					
3 X 1/2			0.840					
3 X 3/4			1.050					
3 X 1			1.315					
3 X 1-1/4	8.000	3.500	1.660	3.500				
3 X 1-1/2			1.900					
3 X 2			2.375					
3 X 2-1/2			2.875					
3-1/2 X 1/2			0.840					
3-1/2 X 3/4			1.050					
3-1/2 X 1			1.315					
3-1/2 X 1-1/4	8.000	4.000	1.660	4.000				
3-1/2 X 1-1/2			1.900					
3-1/2 X 2			2.375					
3-1/2 X 2-1/2			2.875					
3-1/2 X 3			3.500					
4 X 1/2			0.840					
4 X 3/4			1.050					
4 X 1			1.315					
4 X 1-1/4			1.660					
4 X 1-1/2	9.000	4.500	1.900	4.500				
4 X 2			2.375					
4 X 2-1/2			2.875					
4 X 3			3.500					
4 X 3-1/2			4.000					