

Location: \_\_\_\_\_



## T1500-PB-3 with Stainless Steel Integral Rail







### Specification:



MIFAB®'s T1500-PB-3 series channels shall be 39.4" (1000 mm) long with a 4" (100 mm) internal width. Interconnecting channels sections are made from high strength Polymer Concrete and available in sloping and non-sloping (neutral) channels. Each channel comes with a standard 4 mm stainless steel edge rail which is mechanically embedded in the channel.

Installation devices, plastic end cap/outlet cap, and catch basins are available accessories. System comes complete with 4" preformed bottom outlets at T1500, T1510, T1520 and T1530 channel locations. Grates (separate Specification Sheets) are available in in Load Class A-E in a variety of materials. Grates utilize the patented "Clipfix" locking mechanism.

CHANNEL MODEL #	BODY TYPE	INVERT BODY DEPTH		OVERALL BODY DEPTH		MAXIMUM FLOW RATE  GPM	WEIGHT  (LESS GRATE) LBS.
		Sloped - .5% Neutral - 0%	E1 (Min.)	E2 (Max.)	E1 (Min.)	E2 (Max.)	
T1500N-PB-3	Neutral		4.34"	4.34"	5.91"	5.91"	34.94
T1500N-PB-3-BO4	Neutral		4.34"	4.34"	5.91"	5.91"	31.97
T1500N-PB-3-500	Neutral		4.34"	4.34"	5.91"	5.91"	16.95
T1501-PB-3	Sloped		4.34"	4.53"	5.91"	6.11"	31.97
T1502-PB-3	Sloped		4.53"	4.73"	6.11"	6.30"	31.97
T1503-PB-3	Sloped		4.73"	4.93"	6.30"	6.50"	33.07
T1504-PB-3	Sloped		4.93"	5.12"	6.50"	6.70"	33.36
T1505-PB-3	Sloped		5.12"	5.32"	6.70"	6.89"	34.17
T1506-PB-3	Sloped		5.32"	5.52"	6.89"	7.09"	35.27
T1507-PB-3	Sloped		5.52"	5.71"	7.09"	7.29"	36.38
T1508-PB-3	Sloped		5.71"	5.91"	7.29"	7.49"	36.38
T1509-PB-3	Sloped		5.91"	6.11"	7.49"	7.68"	37.48
T1510-PB-3	Sloped		6.11"	6.30"	7.68"	7.88"	37.96
T1510N-PB-3-BO4	Sloped		6.11"	6.30"	7.68"	7.88"	37.48
T1510N-PB-3	Neutral		6.30"	6.30"	7.88"	7.88"	37.99
T1510N-PB-3-BO4	Neutral		6.30"	6.30"	7.68"	7.88"	38.58
T1510N-PB-3-500	Neutral		6.30"	6.30"	7.88"	7.88"	19.84
T1511-PB-3	Sloped		6.30"	6.50"	7.88"	8.08"	39.03
T1512-PB-3	Sloped		6.50"	6.70"	8.08"	8.27"	39.65
T1513-PB-3	Sloped		6.70"	6.89"	8.27"	8.47"	40.26
T1514-PB-3	Sloped		6.89"	7.09"	8.47"	8.67"	40.88
T1515-PB-3	Sloped		7.09"	7.29"	8.67"	8.86"	41.50
T1516-PB-3	Sloped		7.29"	7.49"	8.86"	9.06"	42.11
T1517-PB-3	Sloped		7.49"	7.68"	9.06"	9.26"	42.73
T1518-PB-3	Sloped		7.68"	7.88"	9.26"	9.45"	43.35
T1519-PB-3	Sloped		7.88"	8.08"	9.45"	9.65"	43.97
T1520-PB-3	Sloped		8.08"	8.27"	9.65"	9.85"	44.58
T1520-PB-3-BO4	Sloped		8.08"	8.27"	9.65"	9.85"	319
T1520N-PB-3	Neutral		8.27"	8.27"	9.85"	9.85"	44.58
T1520N-PB-3-BO4	Neutral		8.27"	8.27"	9.85"	9.85"	45.19
T1520N-PB-3-500	Neutral		8.27"	8.27"	9.85"	9.85"	45.19
T1521-PB-3	Sloped		8.27"	8.47"	10.04"	10.24"	22.93
T1522-PB-3	Sloped		8.47"	8.67"	10.04"	10.24"	331
T1523-PB-3	Sloped		8.67"	8.86"	10.24"	10.44"	47.95
T1524-PB-3	Sloped		8.86"	9.06"	10.44"	10.63"	346
T1525-PB-3	Sloped		9.06"	9.26"	10.63"	10.83"	360
T1526-PB-3	Sloped		9.26"	9.45"	10.83"	11.03"	374
T1527-PB-3	Sloped		9.45"	9.65"	11.03"	11.23"	388
T1528-PB-3	Sloped		9.65"	9.85"	11.23"	11.42"	412
T1529-PB-3	Sloped		9.85"	10.04"	11.42"	11.62"	428
T1530-PB-3	Sloped		10.04"	10.24"	11.62"	11.82"	444
T1530-PB-3-BO4	Sloped		10.04"	10.24"	11.82"	12.01"	460
T1530N-PB-3	Neutral		10.24"	10.24"	12.01"	12.01"	477
T1530N-PB-3-BO4	Neutral		10.24"	10.24"	12.01"	12.01"	477

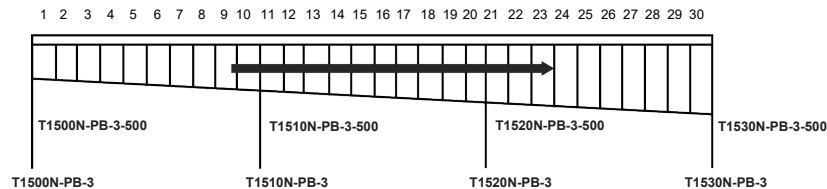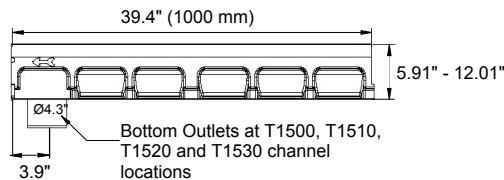

T1500-CB620-3  
Stainless Steel Edge

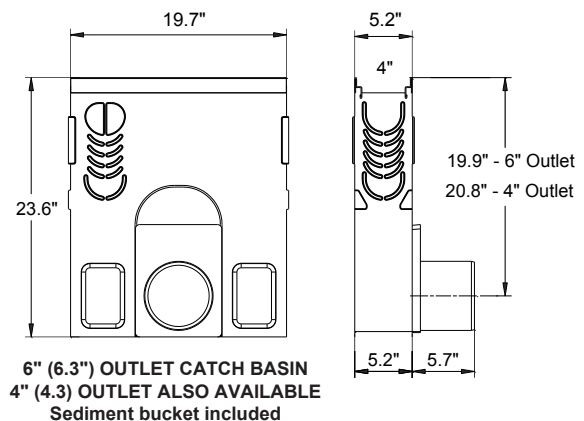

### CLIPFIX ADVANTAGE

The MEA polymer concrete channels have been designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 2024-03-05

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880