

Type _____

-09 -15 -20

P2706 ☐ ☐ ☐

P2707 ☐ ☐ ☐

P2708 ☐ ☐ ☐

P2709 ☐ ☐ ☐



P2713 ☐ ☐ ☐

P2714 ☐ ☐ ☐

Finish

Dimensions (Inches)

Catalog No.	Brushed Nickel	Polished Chrome	Antique Bronze	Lamping	A	B	C	D
P2706	-09	-15	-20	1 (m) 100w	5	7-1/2	6-1/2	2-5/8
P2707	-09	-15	-20	2 (m) 100w	12	7-1/2	6-1/2	2-1/2
P2708	-09	-15	-20	3 (m) 100w	24	7-1/2	6-1/2	2-1/2
P2709	-09	-15	-20	4 (m) 100w	30	7-1/2	6-1/2	2-1/2
P2713	-09	-15	-20	5 (m) 100w	36	7-1/2	6-1/2	2-1/2
P2714	-09	-15	-20	6 (m) 100w	48	7-1/2	6-1/2	2-1/2

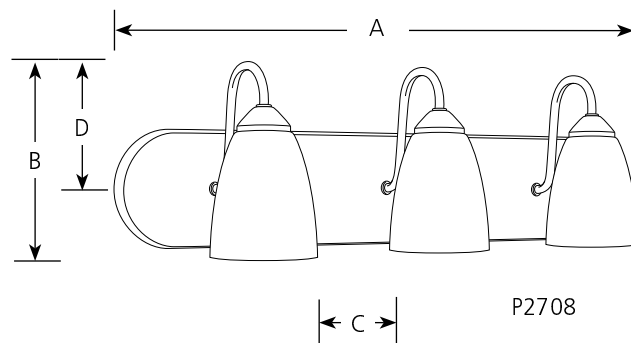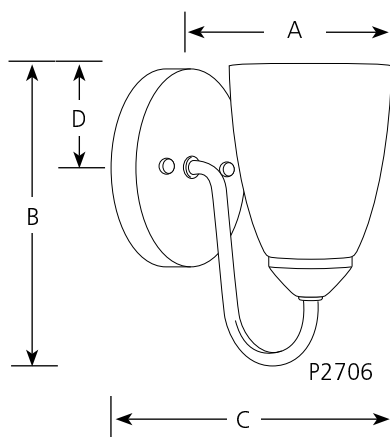

Specifications:

General

- Etched glass shade(s): 4" dia.
- Mounts in "up" or "down" position
- Plated Brushed Nickel (-09) or Polished Chrome (-15) finishes
- Painted Antique Bronze (-20) finish
- Threaded socket ring secures glass
- Steel construction
- Companion Bath and Vanity, Chandelier, Hall and Foyer, Pendant, Wall bracket, fixtures are available

Mounting

- Wall mount
 - Back plate covers a standard 4" hexagonal recessed outlet box
- P2706: 5" dia. (round)

P2707: 12" W., 4-9/16" ht. (rectangular with round ends)

P2708: 24" W., 4-9/16" ht. (rectangular with round ends)

P2709: 30" W., 4-9/16" ht. (rectangular with round ends)

P2713: 36" W., 4-9/16" ht. (rectangular with round ends)

P2714: 48" W., 4-9/16" ht. (rectangular with round ends)

- Mounting strap for outlet box included

Electrical

- Medium base ceramic socket(s)
- Pre-wired

Labeling



- UL-CUL Damp location listed

Type _____

	-09EBWB	-15EBWB	-20EBWB
P2706	☐	☐	☐
P2707	☐	☐	☐
P2708	☐	☐	☐
P2709	☐	☐	☐

Finish

Catalog No.	Brushed Nickel	Polished Chrome	Antique Bronze	Lamping	Dimensions (Inches)			
					A	B	C	D
P2706	-09EBWB	-15EBWB	-20EBWB	1-13w GU-24 (included)	5	7-1/2	6-1/2	2-5/8
P2707	-09EBWB	-15EBWB	-20EBWB	2-13w GU-24 (included)	12	7-1/2	6-1/2	2-1/2
P2708	-09EBWB	-15EBWB	-20EBWB	3-13w GU-24 (included)	24	7-1/2	6-1/2	2-1/2
P2709	-09EBWB	-15EBWB	-20EBWB	4-13w GU-24 (included)	30	7-1/2	6-1/2	2-1/2

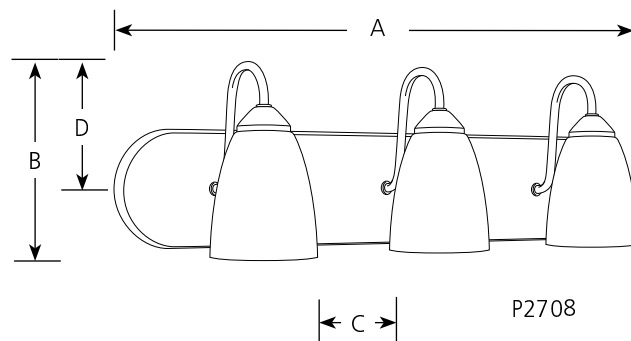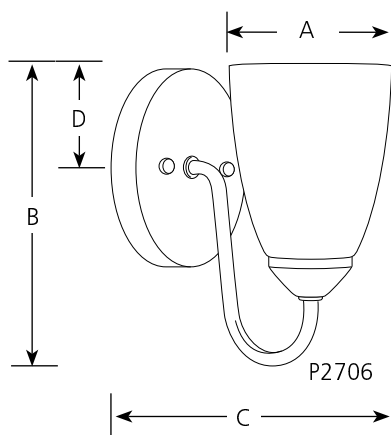

Specifications:

General

- Etched glass shade(s): 4" dia.
- Mounts in "up" or "down" position
- Plated Brushed Nickel (-09EBWB) or Polished Chrome (-15EBWB) finishes
- Painted Antique Bronze (-20EBWB) finish
- GU24 self-ballasted lamp(s) included
- Steel construction
- Companion Bath and Vanity, Chandelier, Hall and Foyer, Pendant, Wall bracket, fixtures are available
- Energy Star® qualified

Mounting

- Wall mount

- Back plate covers a standard 4" hexagonal recessed outlet box
- P2706: 5" dia. (round)
- P2707: 12" W., 4-9/16" ht. (rectangular with round ends)
- P2708: 24" W., 4-9/16" ht. (rectangular with round ends)
- P2709: 30" W., 4-9/16" ht. (rectangular with round ends)
- Mounting strap for outlet box included

Electrical

- GU24 base socket(s)
- Pre-wired

Labeling

- cCSAus Damp location listed
- Title 24 compliant



Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

Assembly & Installation Instructions


CAUTION: Read instructions carefully and turn electricity off at main circuit breaker panel before beginning installation.

2708,2709,2713,2714

WARNING - If any Special Control Devices are used with this Fixture, Follow the Instructions Carefully to assure full compliance with N.E.C. requirements. If there are any questions, contact a Qualified Electrical Contractor.

CAUTION - All glass is fragile, use care when handling Glass component(s) and or Lamp(s).

WARNING - This product contains chemicals known to the State of California to cause cancer, birth defects and /or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.

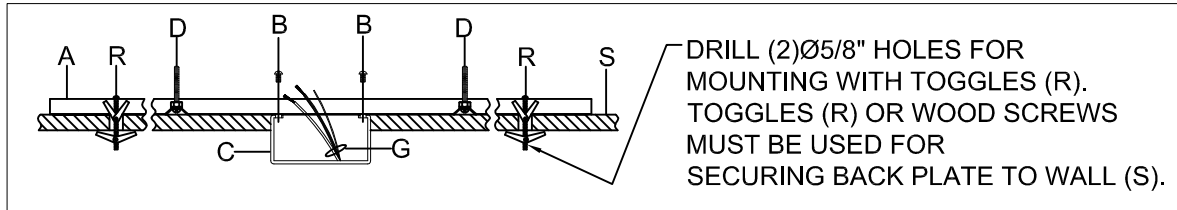


ASSEMBLY STEPS:



PASOS PARA ENSAMBLAR:

MODE D'ASSEMBLAGE:


1. E,D → A
2. H,Q → D
3. B,A → C
4. R → S
5. F → G
6. J,K → D
7. M,N → L
8. P → L

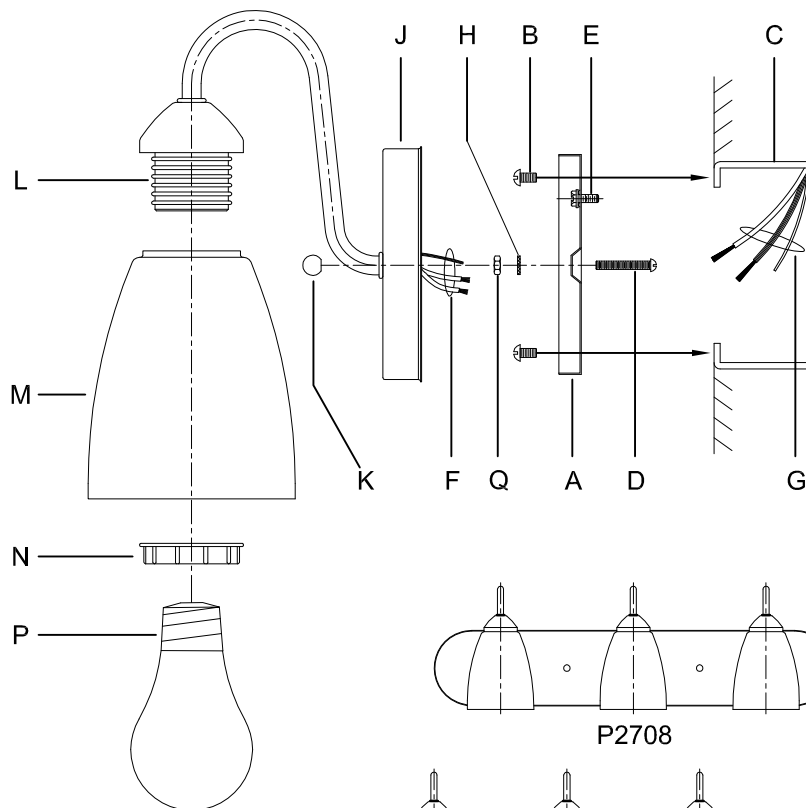


B, C, G & P
(NOT FURNISHED)
(NO INCLUIDA)
(NON FOURNIE)

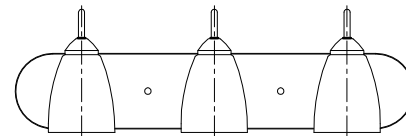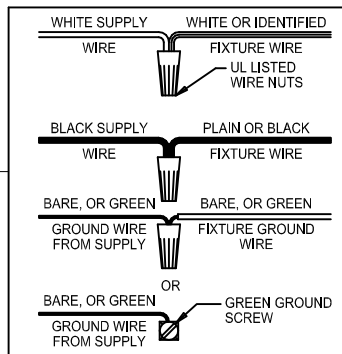


P2708

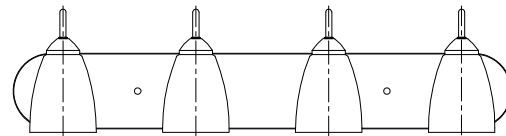

P2709

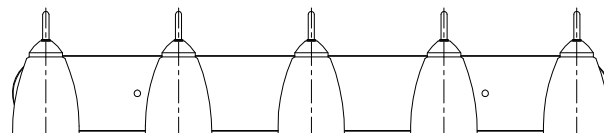

P2016

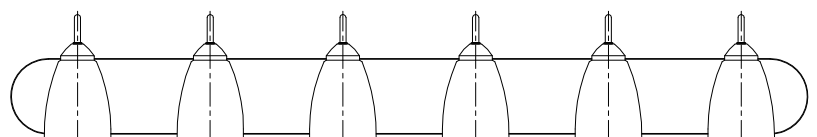

P2017


Instrucciones de ensamblaje e instalación

Precaución: Lea cuidadosamente las instrucciones y desconecte la electricidad del cortacircuitos principal antes de iniciar la instalación.


ADVERTENCIA - SI CON ESTE APLIQUE SE USAN DISPOSITIVOS DE CONTROL ESPECIALES, DEBE SEGUIR LAS INSTRUCCIONES DETALLADAMENTE PARA GARANTIZAR EL CUMPLIMIENTO Estricto CON EL CODIGO NACIONAL DE ELECTRICIDAD (N.E.C.) SI TIEN PREGUNTAS, COMUNIQUESE CON UN ELECTRICISTA CALIFICADO.

PRECAUCIÓN - El vidrio es frágil; tenga cuidado al manipular la(s) bombilla(s) o los otros componentes de vidrio.

ADVERTENCIA - Este producto contiene sustancias químicas que según el Estado de California causa cáncer, defectos de nacimiento y (o) daño al sistema reproductor. Lavarse bien las manos después de instalar, manipular, limpiar o tocar de manera alguna este producto.

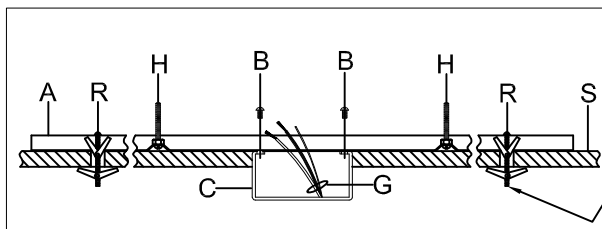

Taladre dos agujeros de 5/8 pulgada (1,6 cm) de diámetro para la instalación con pernos para falso plafón (R). Se deben usar los pernos para falso plafón (R) o los tornillos para madera para sujetar a la pared (S) la placa de fondo.

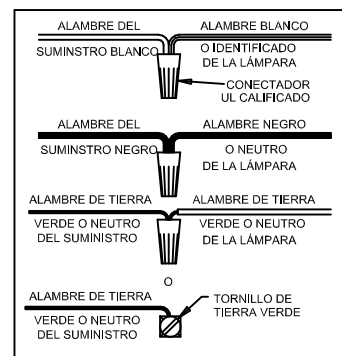


Instructions d'Assemblage et Installation

Mise en garde: Lire les instructions avec soin et couper le courant au disjoncteur central avant de commencer l'installation.

AVERTISSEMENT - S'ILS DISPOSITIFS DE CONTROLE SPECIAUX SONT UTILISES EN CONJONCTION AVEC CE LUMINAIRE, SUIVRE SCRUPULEUSEMENT CES INSTRUCTIONS POUR ASSURER LA CONFORMITE N.E.C. POUR TOUTE ASSISTANCE SUPPLEMENTAIRE, DEMANDER CONSEIL AUPRES D'UN ELECTRICIEN QUALIFIE.

MISE EN GARDE - Le verre est toujours fragile; maniez l'(les) ampoule(s) et les autres éléments de verre avec prudence.

AVERTISSEMENT - Ce produit contient des composants chimiques qui selon L'état de Californie provoquent un cancer, des infirmités de naissance et (ou) du mal au système reproductif. Il faut laver les mains soigneusement après avoir installé, manipulé, nettoyé, ou autrement touché ce produit.

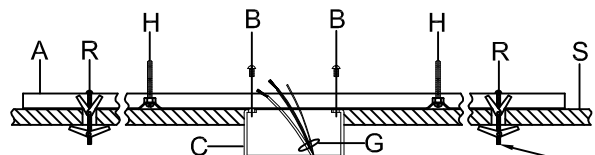

Percez deux trous de 5/8 pouce (1,6 cm) de diamètre pour l'installation à l'aide des boulons à ailettes (R). Les boulons à ailettes ou les vis à bois (R) doivent s'utiliser pour fixer la base au mur (S).

