


PRODUCT NAME: Saturn ITEM NUMBER: E22453-11BZ

Please consult your electrician for hanging fixture and wiring.

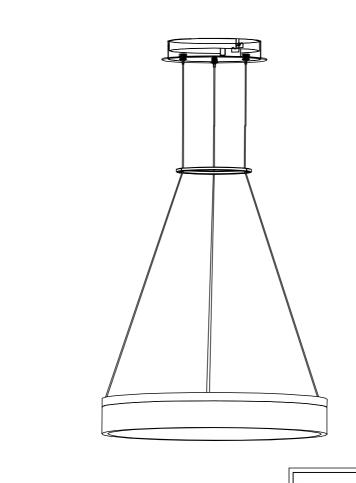

WARNING: WIRES NEED TO BE CONNECTED TO DRIVER FOUND IN CANOPY AND SHOULD NOT CONECT DIRECTLY TO POWER SOURCE OR A SHORT MIGHT OCCUR.

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.

Below is a list of recommended dimmers:

Lutron MACL-153M Lutron DVL-153P Lutron SCL-153P Leviton IPL06-10Z Leviton 6674-POW

Due to the inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

24W LED

PRODUCTS ARE NOT INENDED FOR COMMERCIAL USE.

MADE IN CHINA Page 1 of (2)


PRODUCTS ARE NOT INENDED FOR COMMERCIAL USE.


MADE IN CHINA Page 1 of (2)

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation




Locate all hardware & components before discarding packaging

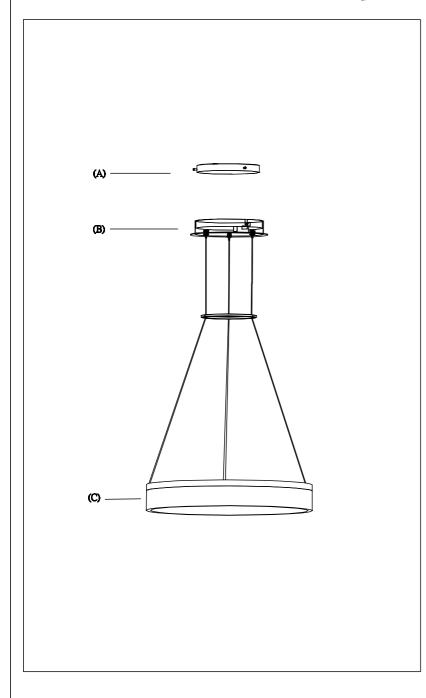




Step.1: Remove Bracket (A) from fixture and install to electrical box.



Step.2: Wire fixture to wires in outlet box.
Install Green wire to Ground Screw.



Step 3: Adjust wire length to desired hanging height. Install Canopy (B) to Bracket (A) and tighten screws at the ends of canopy to secure.

Cleaning & Care:

Clean with soft cloth and a mild detergent. Do not use abrasive cleaner.

Page 2 of (2)