




Intellihot
Endless water. Zero waste.™

COMMERCIAL

The Legionator™


WORLD'S FIRST POINT-OF-USE TANKLESS DISINFECTION DEVICE



The Legionator heats and disinfects water simultaneously. A set of high-quality quartz tubes heats water to a comfortable temperature on-demand. As the water is exiting the unit, ozone (a highly effective disinfectant) is injected into the water. This has two effects:

- (1) It disinfects the bacteria in water.*
- (2) The ozone is then carried in the water to the faucets and helps mitigate the bacteria present in the faucet valve seats and aerators.*

- ♦ **Automatic Ozonation** - Helps decontaminate automatic faucets from pathogens by dosing at appropriate intervals
- ♦ **Scale-resistant Infrared Heating** - Quartz tubes heat water using Infrared technology which combats scale formation.
- ♦ **Efficient and Healthy** - Due to its tankless design, the Legionator does not store water; thereby delivering endless clean water on-demand and saving energy.
- ♦ **Space Saving** - Install under a sink or in a nearby closet. ADA Compliant
- ♦ **Built-in Ozone Generator** - The unit generates ozone from ambient air using on-board power and does not require any refills.
- ♦ **Precise Metering** - Ensures the correct amount of ozone is added at any flow rate


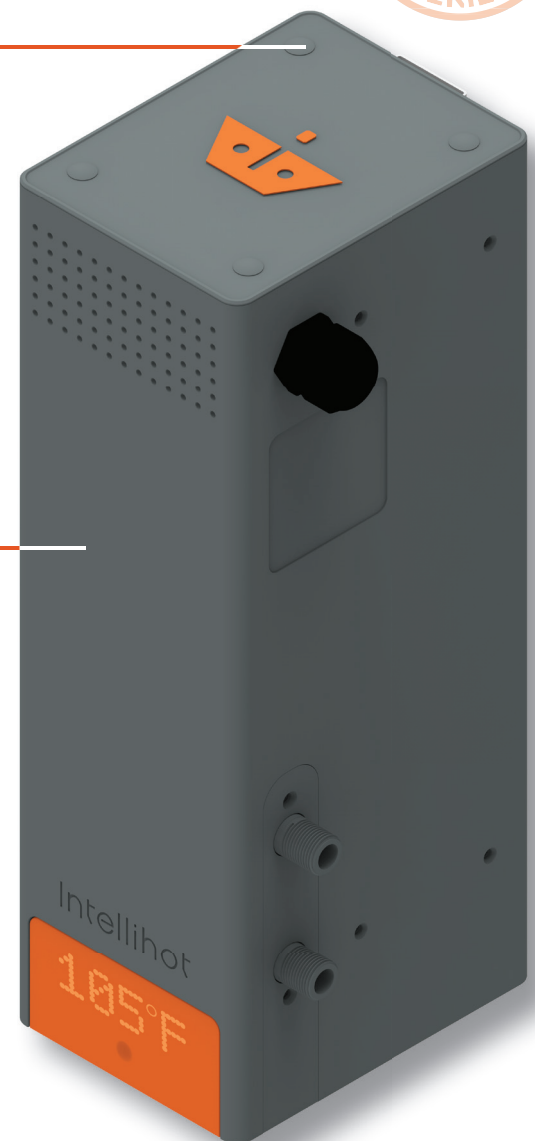


Legionator iL6.0

Legionator™ Specifications

PARAMETER	MODELS	
ELECTRICAL	iL3.5	iL6.0
Supply Voltage	120 Vac, Single Phase	208 Vac, Single Phase
Power Rating	3.5 kW	6 kW
Current Draw (Max)	29 Amperes	29 Amperes
PERFORMANCE	iL3.5	iL6.0
Activation Flow Rate	0.2 GPM	
Min Set Point Temp	100 °F	
Max Set Point Temp	120 °F	
Min Operating Pressure	30 psi	
Max Operating Pressure, psi	150 psi	
PHYSICAL	iL3.5	iL6.0
Height (Inches)	14.5"	
Width (Inches)	4.5"	
Depth (Inches)	6"	
Weight (lbs)	7 lbs	
PLUMBING	iL3.5	iL6.0
Water In/Out Connection Size	3/8" Compression	
Plumbing Orientation	Inlet/Outlet on the Right Side	

Note: Due to Intellihot's policy of continuous product improvements, design and technical specifications are subject to change without notice. Version 2.23

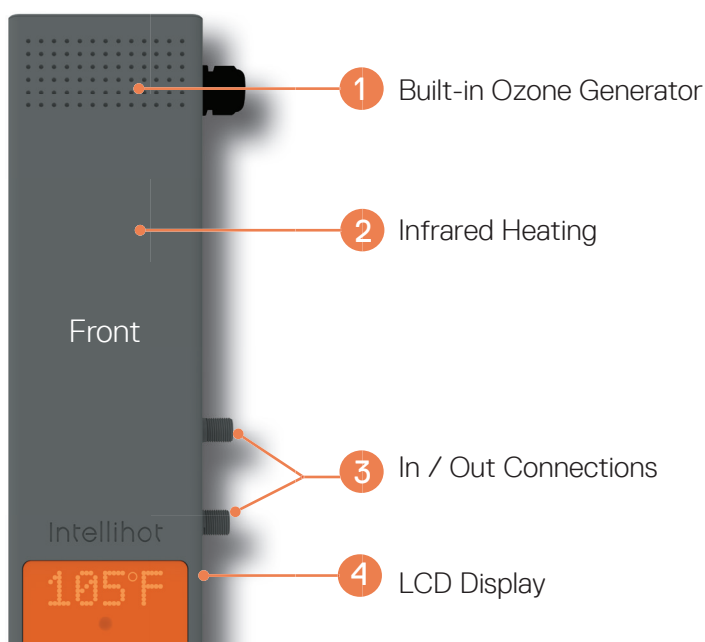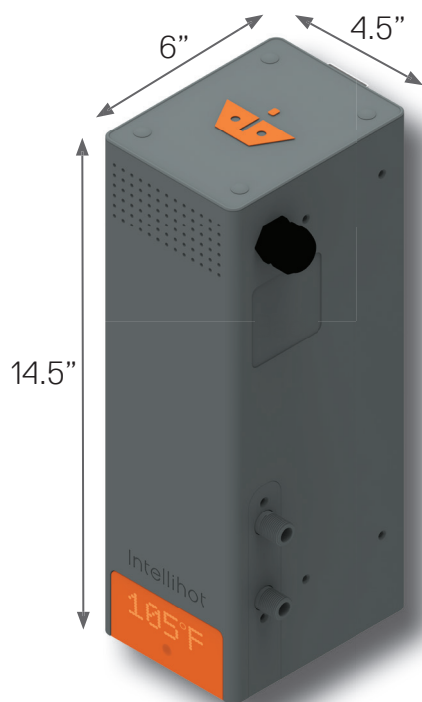

www.intellihot.com
 Intellihot Inc.
 2900 W. Main Street
 Galesburg, IL 61401
 Phone: 877.835.1705
 Email: sales@intellihot.com

