



Florestone Saflor® Molded Receptors Installation Instructions

1. Examine sub-floor shower area for movement and/or squeaks. Fix any problems encountered.
2. Integral drain requires minimum 5" diameter by 2¼" deep recess in sub-floor for adequate clearance.
3. Level and plumb pan on sub-floor. Shim or use mortar if needed to compensate for out of level sub-floor.
4. Install Wedge-Lok® seal. Use soapy water to lubricate.
5. Do not nail or screw into tiling flange. May cause tiling flange to crack or break.
6. Pour water into shower pan to test for proper drainage upon connection of wastepipe prior to finishing walls.


Bottom

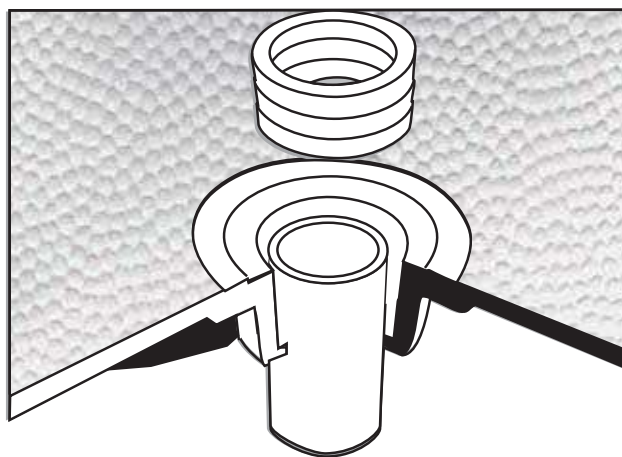

Exclusive Wedge-Lok® Seal

Florestone Saflor Shower Receptors come with an integral drain molded into the receptor, eliminating the need for a separate drain. The exclusive seal is easily installed without special tools. No caulking, no mess, no places to leak. Drain will also accept conventional lead joint.

2" I.P.S. **Wedge-Lok®** Seal fits plastic and steel only. For copper waste, specify **Josam Jiffy-Joint™** or equal. For cast iron, **Josam Jiffy-Joint™** or equal may be required because of OD variance. Specify for copper or cast iron pipe.

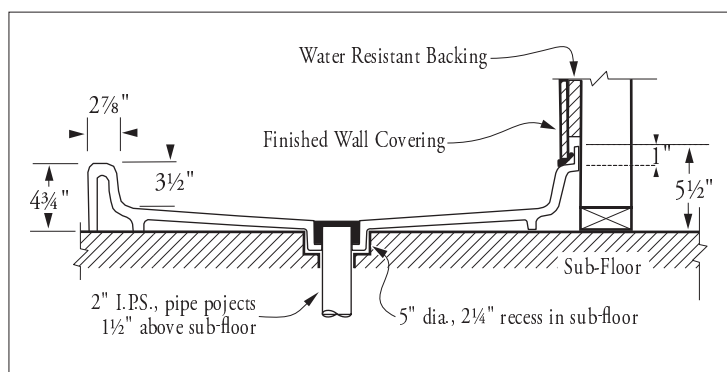

FLORESTONE PRODUCTS CO., INC.

2851 Falcon Drive • Madera, CA 93637

T. 559.661.4171 • T. 800.446.8827

F. 559.661.2070 • florestone.com

42421WH ✓

THREE YEAR LIMITED WARRANTY FLORESTONE

Florestone molded shower receptors, terrazzo shower receptors, molded mop receptors, utility sinks, terrazzo mop receptors, fiberglass bathing units, and bath/shower combinations are guaranteed to the purchaser-for-use to be free from defective workmanship and material for three (3) years from the date of purchase, when the unit is installed according to the installation instructions and local codes and ordinances.

Florestone Whirlpool Systems are guaranteed to the purchaser-for-use to be free from defective workmanship and material for one (1) year from date of purchase, when the unit is installed according to installation instructions and local codes and ordinances. Any alteration to the system or relocation of the pump will void all warranties.

Any unit reported to Florestone, and found to be defective in workmanship and material upon inspection by an authorized Florestone representative will be repaired or exchanged at Florestone's option without charge.

This warranty is non-transferable and shall be voided if the unit is removed from its place of initial installation. This warranty does not cover shipping damage. Such damage is the responsibility of the carrier. The purchaser must open the box and inspect the unit for damage when it is delivered and, if damage is discovered, should file a freight claim directly with the carrier.

Cost of repair or replacement for damage during shipment shall be paid by the purchaser, who must look to the carrier for reimbursement. Florestone will not be responsible for labor, transportation or other costs incurred in the removal and/ or reinstallation of the defective unit. Florestone will not be responsible

for any incidental or consequential damage arising from any cause what so ever, nor for damage to the unit produced by outside causes, including but not limited to the following: improper installation, use of abrasive cleaners, lightning, flood, fire, careless handling, or lack of cleaning and maintenance of the caulking or an act of God.

There are no warranties applicable to Florestone products except as expressly stated herein or as implied in applicable state and federal laws. Implied warranties of merchantability and fitness for a particular purpose, to the extent that they are applicable, are limited to three (3) years from the date of purchase.

Florestone Fiberglass Units are manufactured of high quality fiberglass-reinforced polyester resins and conform to the standards set forth in USAS Z 124.1-1987.

NOTICE TO END USERS

To maintain your limited warranty rights, Florestone units should be kept clean and the caulking around the units should be regularly maintained by the end user.

Modification/alteration to a Florestone product after it leaves the factory will void all warranties.

Because of impurities and the use of many additives in water, Florestone will not be responsible for any color change or tarnishing of plating on chrome, brass and gold jets.

Please check unit dimensions before roughing in. Dimensions are subject to change without notice. It is the responsibility of the installer to verify dimensions prior to installation. Florestone will not be responsible for any charges incurred due to unit dimension variance.