



J3765

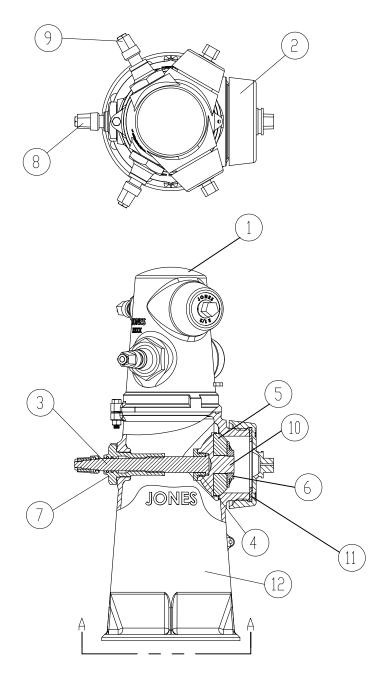



MANUFACTURED IN COMPLIANCE WITH AMERICAN WATER WORKS ASSOCIATION, WET-BARREL FIRE HYDRANT STANDARD, AWWA C-503

PARTS LIST:			PRODUCT FEATURES:	
ID	PART NAME	MATERIAL		FEATURE DESCRIPTION
1	HYDRANT HEAD	ASTM B584 ALLOY C89833 OR C87600	1	INDIVIDUAL STEM OPERATION
2	HOSE CAPS	PLASTIC OR BRONZE	2	LIMITED NUMBER OF INTERNAL PARTS
3	HYDRANT STEM	SILICON BRONZE ASTM B584 C87600	3	PRODUCT RATED UP TO 200 PSI; HYDROSTATICALLY TESTED AT 400 PSI
4	STEM LOCKNUT	BRASS ASTM B584 ALLDY C89833	4	AVAILABLE IN A VARIETY OF BOLT HOLE PATTERNS
5	BEVELED HYDRANT DISC	BUNA-N	5	LOW ZINC SILICON BRONZE STEMS
6	HYDRANT DISC LOCKNUT	BRASS ASTM B584 ALLOY C89833	6	HEAVY DUTY DISC HOLDER
7	STEM INSERT	BRASS ASTM B584 ALLDY C89833	7	D-RING CONSTRUCTION IN STEM INSERT
8	PENT NUT	SILICON BRONZE ASTM B584 C87600	8	PENT NUTS SIZES AVAILABLE; 1-1/8", 1-1/2", 1-3/4"
9	PENT NUT RETAINER	ASTM B62 ALLDY C83600	9	PLASTIC CAPS AVAILABLE
10	HYDRANT DISC HOLDER	BRASS ASTM B584 ALLDY C89836	10	10 YEAR LIMITED WARRANTY
11	NDZZLE GASKET	NEOPRENE	11	VARIOUS DUTSIDE FINISHES AVAILABLE
12	SPOOL	ASTM B584 ALLDY C89833 DR C87600	12	NOZZLE THREADS CONFORM TO NFPA 1963, NH/NST
13			13	
14			14	
			D I	

Approvals:

Date:

LAST REVISED: 05/23/16