
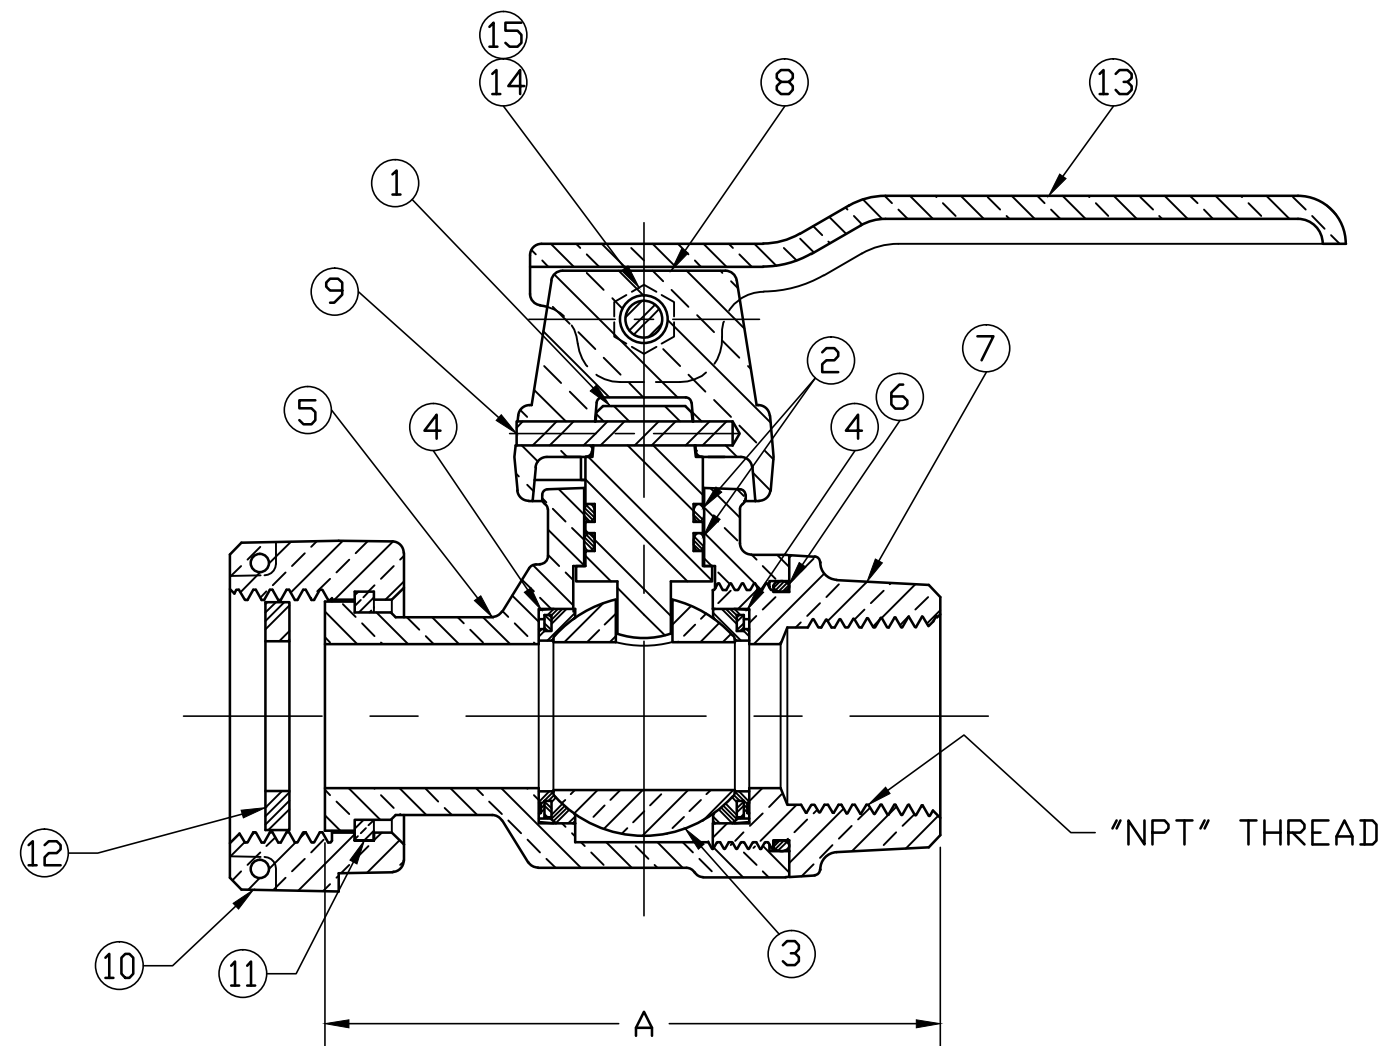




No.	DESCRIPTION	MATERIAL
1	STEM	CAST LOW LEAD BRASS ALLOY
2	O-RING	EPDM D2000
3	BALL	CAST LOW LEAD BRASS ALLOY
4	GASKET - SEAL	NITRILE D2000
5	BODY	CAST LOW LEAD BRASS ALLOY
6	O-RING	EPDM D2000
7	END PIECE	CAST LOW LEAD BRASS ALLOY
8	CAP	CAST BRASS ASTM B62 ALLOY C83600
9	SOLID PIN	AISI 303 STAINLESS STEEL
10	PLAIN NUT	CAST BRASS ASTM B62 ALLOY C83600
11	SNAP RING	PHOS BRONZE
12	RUBBER GASKET	NITRILE ASTM D2000
13	LEVER HANDLE	CAST BRASS ASTM B62 ALLOY C83600
14	MACH. SCREW	AISI 304 STAINLESS STEEL
15	HEX LOCKNUT	TYPE 18-8 STAINLESS STEEL

VALVE SIZE	A	NPT SIZE
3/4"	3-57/64"	3/4"
3/4 x 1"	3-7/16"	1"
1"	4-11/64"	1"

FILEPATH: PROD-ENG\JJ\SUBMITTALS\E1908

						DRFTR	RWB	2/4/10	JAMES JONES CO.					
						CHKR								
						ENGR			UNLESS OTHERWISE NOTED SURFACE PREPARATION: BREAK CORNER(S) ---- .000 SURFACE FINISH -- XX RMS TOLERANCE(S): LINEAR ----- ± .000 ANGULAR ----- ± 0°00'					
						MGR								
									THIRD ANGLE PROJECTION					
										REF. No.	SCALE			
							BY	DATE						
						STK No:								
						MAT'L:								
						DESCR.								
								BALL STRAIGHT LLB METER VALVE w/ HANDLE (FIP x METER SWIVEL NUT)						
REV	ECR	DESCRIPTION	DATE	BY	CHKR			PART NUMBER E1908						

PART NUMBER
E1908
JJ-MRKTG