


SOCKOLET®

SIZE ON SIZE
CLASS 3000



Outlet Size	Dimensions					Weight
	A	B	C	D	E	
NPS ½	1	1 ⅜	1 ⅝	0.622	⅞	0.150
NPS ¾	1 ⅛	1 ⅝	1 ⅞	0.824	½	0.250
NPS 1	1 ⅝	2 ⅞	1 ⅞	1.049	¾	0.450
NPS 1 ¼	1 ⅝	2 ⅞	1 ¾	1.380	⅞	0.650
NPS 1 ½	1 ¾	2 ⅞	2	1.610	1 ⅛	0.850
NPS 2	1 ½	3 ½	2 ⅞	2.067	1 ⅝	1.400
NPS 2 ½	1 ⅞	4 ⅛	3	2.469	¾	2.250
NPS 3	1 ¾	4 ⅜	3 ⅜	3.068	1 ⅝	3.750
NPS 3 ½	1 ⅞	5 ⅝	4 ⅞	3.548	1 ⅞	4.300
NPS 4	1 ⅞	6 ⅛	4 ¾	4.026	1 ⅞	6.600
NPS 5	2 ⅞	7 ¼	5 ¼	5.047	1	9.000
NPS 6	2 ⅞	8 ⅜	6 ⅛	6.065	1 ¼	15.500

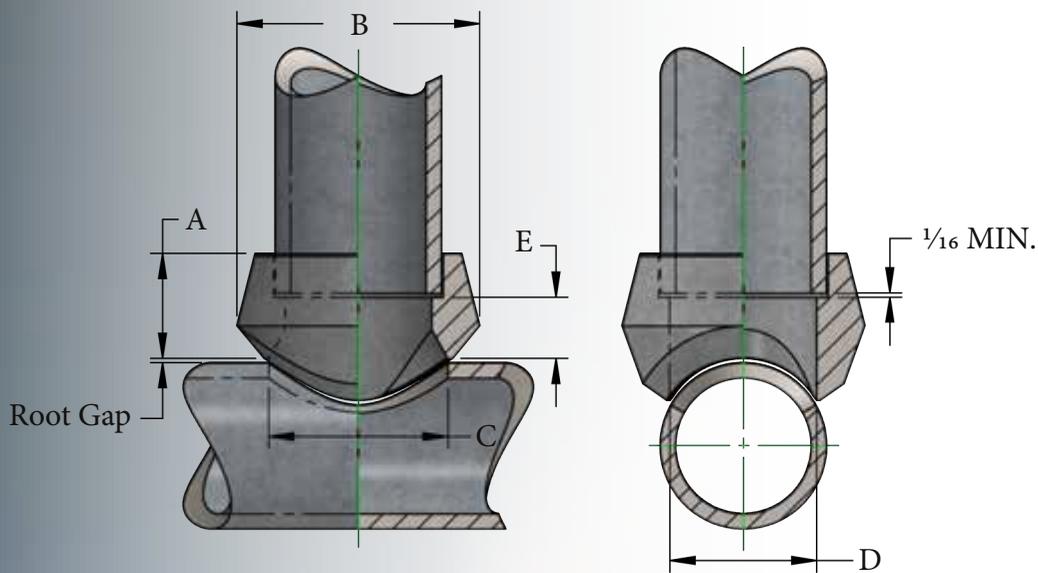

RUN SIZE CONSOLIDATIONS - CLASS 6000

RUN SIZES	Outlet Size					
	½	¾	1	1 ¼	1 ½	2
	1 - ¾	1	1 ½ - 1 ¼	1 ½	2	2 ½
	2 - 1 ¼	2 ½ - 1 ¼	2 ½ - 2	2 ½ - 2	2 ½	3
	6 - 2 ½	10 - 3	10 - 3	3 ½ - 3	3 ½ - 3	4
	36 - 8	36 - 12	36 - 12	8 - 4	5 - 4	5
	FLAT	FLAT	FLAT	36 - 10	8 - 6	6
				FLAT	18 - 10	10 - 8
					36 - 20	20 - 12
					FLAT	36 - 24
						FLAT

RUN SIZE CONSOLIDATIONS - CLASS 9000

RUN SIZES	Outlet Size					
	½	¾	1	1 ¼	1 ½	2
	1 - ¾	1	1 ½ - 1 ¼	1 ½	2	2 ½
	2 - 1 ¼	2 ½ - 1 ¼	2 ½ - 2	2 ½ - 2	2 ½	4 - 3
	6 - 2 ½	10 - 3	10 - 3	3 ½ - 3	3 ½ - 3	6 - 5
	36 - 8	36 - 12	36 - 12	8 - 4	5 - 4	14 - 8
	FLAT	FLAT	FLAT	36 - 10	10 - 6	36 - 16
				FLAT	36 - 12	FLAT
					FLAT	