


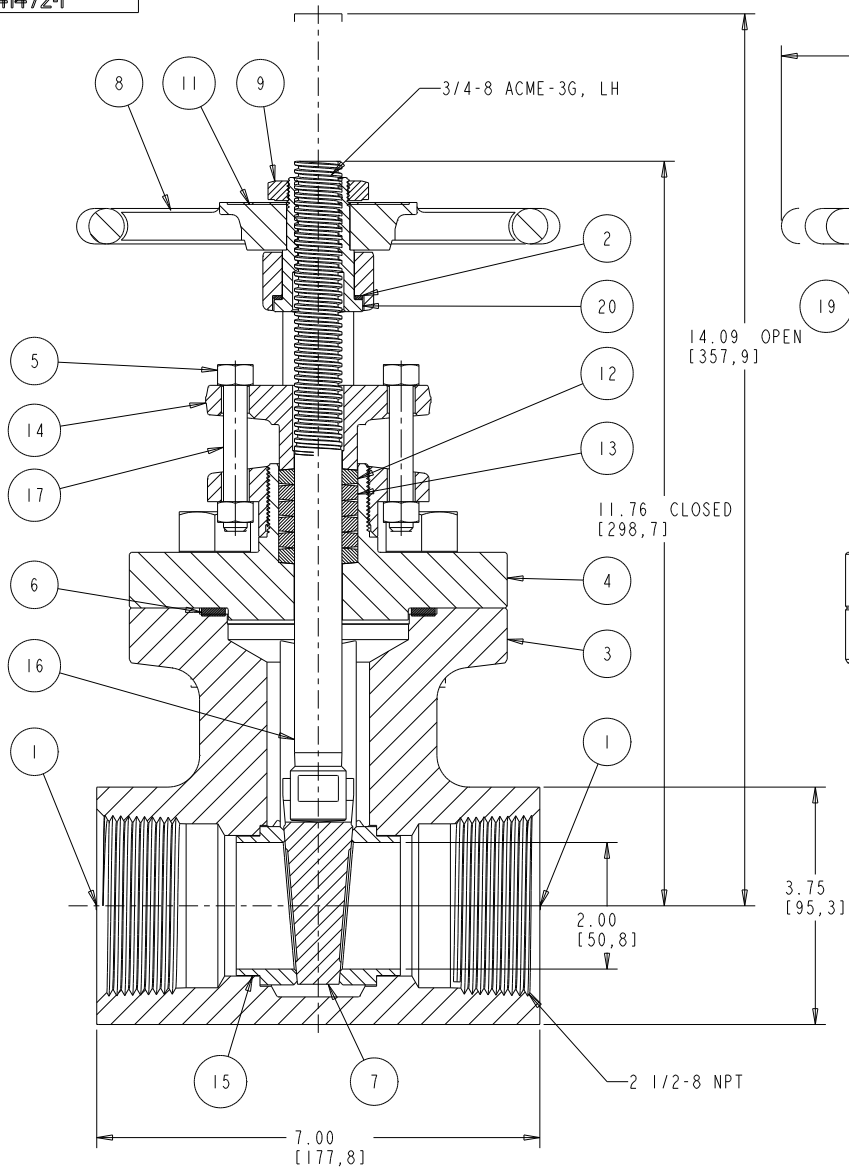


NOTE:
PRESS SEATS PER RMPVFSP024
COLOR CODED AND TAGGED PER RMPVFSTD004
GATE VALVE TO BE TESTED PER API-598 PER RMPVFLT004

X.XX Inches
[XX,X] MM

WEIGHT	39.8 LBS	18.06 Kg
Cv FACTOR		174.0

CNS	57468
REV	07
BY	R. Jackson
DATE	11-20-2003

DWN BY	JOE CECIL
CHK BY	S.R.
RVD BY	
DATE	5-7-63
SCALE	0.750

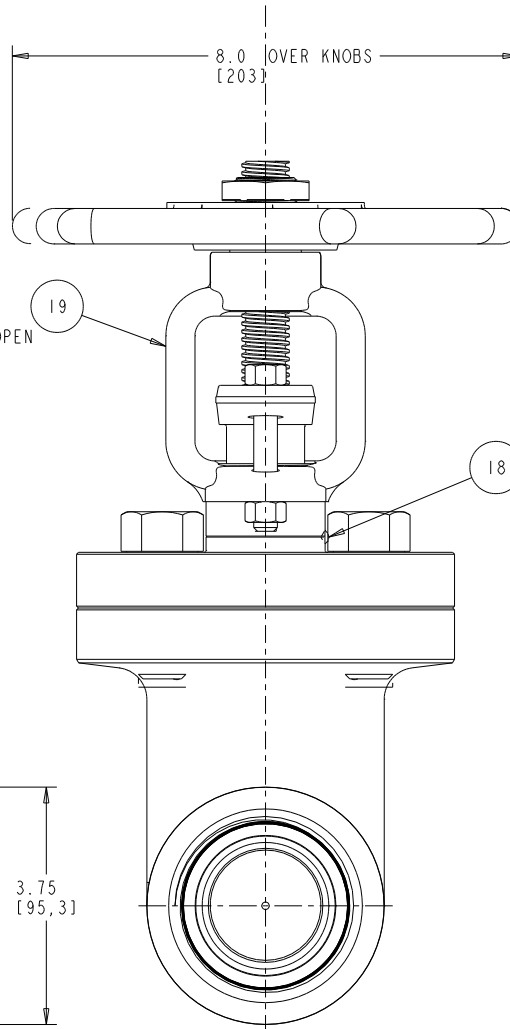

ITEM	QTY	ITEM NO	DRAWING	PART NAME	MATERIAL
1	2	58415		2 1/2 THD PROTECT	OR POLYETHYLENE
2	1	58143	9205	BEARING RING	AMPCO ALUM BRONZE
3	1	20605	41473	BODY	A105
4	1	30240	41402	BONNET	A105
5	4	50226	60684B	FINISHED HEX NUT	F594 304SS
6	1	55030	45706H	GASKET	304/GRAFOIL
7	1	32657	41404	GATE	A479 TYPE 410
8	1	35047	36964	HANDWHEEL	MALLEABLE IRON
9	1	50004	5608	HANDWHEEL NUT	A105
10	4	50072	45417G	HEX HD BOLT	A193 GR B7
11	1	40098	38235	NAME PLATE (GREEN)	ALUMINUM
12	2	55190		PACKING	BRAIDED GRAPHITE
13	4	55141		PACKING	FLEXIBLE GRAPHITE
14	1	34064	34888	PACKING GLAND	A105
15	2	32013	5347	SEAT RING	A479 T410 HF
16	1	32820	41403	STEM	A479 TYPE 410
17	2	50273	21912	STUD BOLT	F593 304SS
18	1	58452		TACK WELD	(RMPWPS555)
19	1	34005	34885	YOKE	A105
20	1	58101	18172	YOKE NUT	A582 TYPE 416

SERIES No:		12111-10	
ITEM No:		200548	
RATING: 1975 PSI • 100 F		SPECS: API 602/ASME B16.34	
BODY A105		SEAT 13CF HF	DISC 13CR
		STEM 13CR	

FLOWSERVE Vogt Valves
SULPHUR SPRINGS, TEXAS, USA
2 1/2 CLASS VALVE - FORGED STEEL
- OS&Y - BOLTED BONNET - BOLTED GLAND
5" RENEWABLE SEATS - LOOSE SLOTTED GATE
THREADED ENDS - CLASS 800
41472-1