

SUBMITTAL DATA SHEET

NL Ball Style Meter Stop – 74602B

Copper Flare x Meter

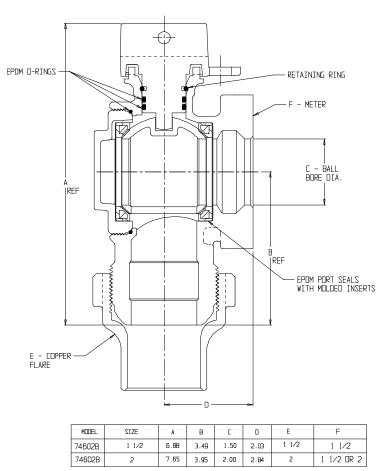



MODEL NO.	SIZE	A	В	С	D	E	F
74602B	3/4 X 3/4 X 5/8	4.37	1.93	.75	1.93	3⁄4	5⁄8
74602B	1 X 3/4 X 5/8	4.83	2.39	. 75	1.93	1	5/8
74602B	3/4	4.37	1.93	. 75	1.78	3⁄4	5⁄8 X 3⁄4, 3⁄4
746028	1 X 3⁄4 X 3⁄4	4.83	2.39	. 75	1.78	1	5/8 X 3/4, 3/4
74602B	1	5.20	2.55	1.00	2.45	1	1

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball
- Rated for 300 PSIG water pressure
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker



A.Y. McDonald Mfg. Co. P.O. Box 508 Dubuque, IA 52004-508 **Toll Free:** 1-800-292-2737 **Fax:** 1-800-832-9296 **Hours:** 7:00 a.m. – 5:00 p.m., CST

sales@aymcdonald.com www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: