

Model

SU-7016-A-1.0

Rear Spud Vitreous China Wash Down Urinal

DESCRIPTION

Complete vitreous china rear spud small urinal.

FLUSH CYCLE


□ SU-7016-A-1.0 (1.0 gpf/3.8 Lpf) Code: 1107016



SPECIFICATIONS

Urinal

- · Wall hung vitreous china
- Washdown flushing action
- ¾" I.P.S. rear spud inlet
- 2" NPT outlet flange included
- · All mounting hardware included
- · Integral flushing rim
- 100% factory flush tested
- · Carrier not included
- Vandal resistant strainer assembly included
- Compliant to the applicable sections of ASME A112.19.2/CSA B45.1



NOTE: All vitreous china dimensions shown in these drawings are nominal. Dimensions can vary wihin the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. Please take this into consideration when planning rough-in and plumbing layouts.


Product Specification

Washdown urinal shall be made of vitreous china with a %" rear spud. Urinal shall have a 14 %" rim from finished wall. Urinal shall include a vandal resistant strainer, inlet spud, and hanger. Urinal shall be Sloan Model SU-7016-A-1.0.



This fixture meets or exceeds the following specifications:
The American Disabilities Guidelines and ANSI A117.1 when installed according to these requirements.

NOTE: Plumbing System Requirements √ Minimum **Flowing** Pressure: 25 PSI √ Maximum Static Pressure: 80 PSI

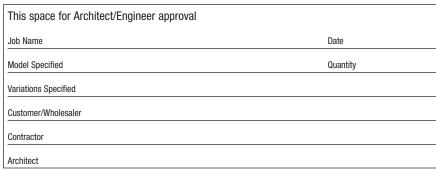



Sloan 10500 Seymour Avenue Franklin Park, IL 60131 Phone: 1-800-9-VALVE-9 Fax: 1-800-447-8329 www.sloanvalve.com

© 2014 Sloan Valve Company SU-7016 02-14