
TAG:

# **Architect/Engineering Specifications:**

Single hole deck mount electronic sensor faucet with polished chrome plated brass body with integral spout, 0.5 GPM vandal resistant nonaerated spray device, AC/DC control module with internal flow control setting switches, temperature control mixing valve with check valves and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements.

| Job Name             |          |
|----------------------|----------|
| Model Specified      | Quantity |
| Variations Specified |          |
| Date                 |          |



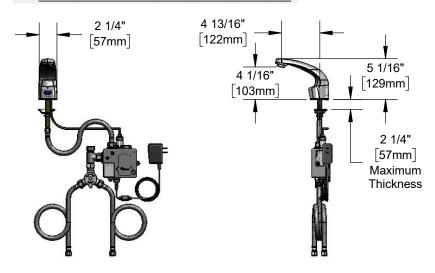

### Features & Benefits:

- Single hole deck mount faucet w/ polished chrome plated brass body w/ integral spout
- 0.5 GPM vandal resistant non-aerated spray device, Series 8 (B-0199-08-N05)
- Water resistant control module w/ internal flow control switches for adjusting auto time out & shut off delay settings
- Optional auto flush feature flows water for 30 seconds after every 12 inactive hours
- Plug in AC transformer or (4) AA battery (DC) power options
- Mechanical temperature mixing valve w/ check valves
- 18" flexible stainless steel supply hoses w/ 3/8" compression inlet connections
- Low battery LED indicator light
- Material: Polished chrome plated brass body

## **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)
- UL 1951

Warranty: Three Year (Limited)

### **Performance Data:**

Pressure: 20 - 125 psi

Temperature: 40 °F - 140 °F

Flow Rate: 0.5 GPM @ 60 psi

Water Consumption: @10 sec=.08 gal



**ADA Compliant** 

@15 sec=.12 gal

### Optional Outlets (Series 3 / VR Series 8)


| GPM  | Aerated        | Non-Aerated (Laminar) | VR Aerated     | VR Non-Aerated (VR Laminar) | Optional Deck Plates  |
|------|----------------|-----------------------|----------------|-----------------------------|---|
| 0.35 | N/A            | □ B-0199-03-N035      | N/A            | □ B-0199-08-N035            | <ul><li>□ 4" Chrome Plated Brass Deck Plate</li><li>□ 8" Chrome Plated Brass Deck Plate</li></ul> |
| 0.5  | N/A            | □ B-0199-03-N05       | N/A            | Standard                    |   |
| 1.0  | N/A            | N/A                   | N/A            | □ B-0199-08-LF10            |   |
| 1.5  | □ B-0199-03-WS | N/A                   | □ B-0199-08-WS | □ B-0199-08-LF15            |   |
| 2.2  | □ B-0199-03    | □ B-0199-26           | □ B-0199-08    | □ B-0199-28                 |   |











late late