
TAG:	

Double Pantry Faucet

Architect/Engineering Specifications:

3 3/8" wall mount mixing faucet with polished chrome plated brass body, 5 3/4" swivel/rigid gooseneck with stream regulator outlet, compression cartridges with spring checks, lever handles and 1/2" NPT female inlets. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

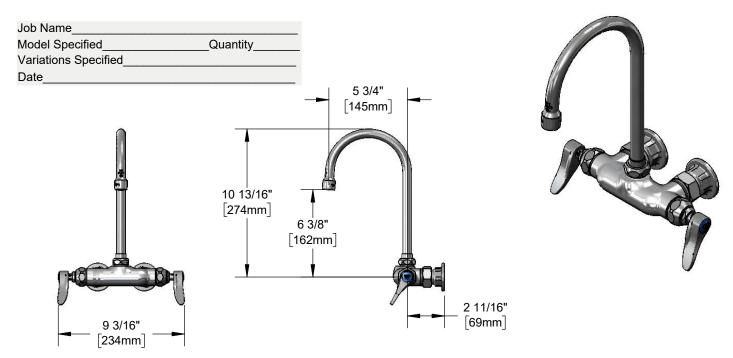



Features & Benefits:

- Wall mount mixing faucet with polished chrome plated brass body
- 5 3/4" swivel/rigid gooseneck
- · Lock washer provided for rigid application
- Stream regulator outlet, Series 1
- Quarter-turn Eterna compression cartridges w/ spring checks to prevent crossflow water
- · Lever handles w/ color coded indexes
- 1/2" NPT female eccentric inlets w/ Ø2" flanges
- Adjustable centers from 3 1/8" to 3 5/8"
- Material: Polished chrome plated brass body & tubular spout and chrome plated metal handles

Non-Aerated

Product Compliance:





- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Performance Data:

• Pressure: 20 - 125 psi

Temperature: 40 °F -140 °F
Flow Rate: 18.50 GPM @ 60 psi







Optional Outlets (Series 1 / VR Series 6)

GPM	Aerated	(Laminar)	VR Aerated	(VR Laminar)	Optional Cartridges With Checks
0.35 0.5 1.0 1.2 1.5 2.2	N/A N/A B-0199-01-F10 B-0199-01-F12 B-0199-01-WS B-0199-01	□ B-0199-01-N035 □ B-0199-01-N05 N/A □ B-0199-01-LF12 □ B-0199-29 □ B-0199-21	N/A □ B-0199-06-F10 □ B-0199-06-F12 □ B-0199-06-WS	□ B-0199-06-LF12	 □ Quarter-Turn Cerama w/ Check Valve □ Quarter-Turn Eterna w/ Spring Check (Standard) Optional Handles □ 4" Wrist Action □ Lever (Standard) □ 4-Arm

VR Non-Aerated







T&S BRASS AND BRONZE WORKS, INC.

