

CHECK VALVE



Figure 141702



NFP141702P

FEATURES & BENEFITS


- Available sizes: 2" and 4"
- Connection type: Groove x Groove
- Horizontal or vertical installation
- 1/2" IPS tapped body for additional equipment if needed
- Finish: Rough brass
- Material: Brass C85700

TECHNICAL DATA

- Complies with UL 312 and FM 1210 (4" is the only size that complies)
- Grooved to ANSI/AWWA C606-87
- Working pressure: 250lbs
- Testing pressure = 100%, 125lbs

INSTALLATION

Install with approved installation practices. Ensure that the proper lubricant is applied to the groove coupling gaskets as needed.

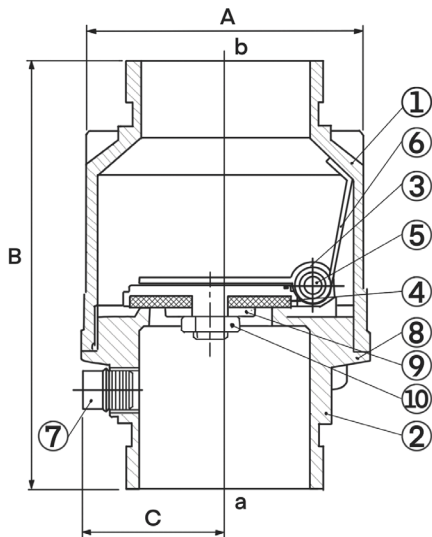

MATERIAL CHART

NO.	DESCRIPTION	MATERIAL
1	Upper Body	Brass C85700
2	Lower Body	Brass C37700
3	Disc	Brass C36000
4	Washer	Rubber
5	Hinge Pin	SS304
6	Spring	SS304
7	Plug	Brass C36000
8	O-Ring	NBR
9	Lock Washer	Brass C36000
10	Lock Nut	Brass C36000

PART #	SIZE	a	b	A	B	C
NFP141702K	2"	Groove	Groove	3.150	5.669	1.772
NFP141702M	4"	Groove	Groove	5.433	7.953	2.992

*Not for use in potable systems