


REPAIR PARTS

GPH H-SERIES Package Heat Pumps

GPH1324H21AB
GPH1324H21AC
GPH1324H21AD
GPH1324H21A
GPH1330H21AB
GPH1330H21AC
GPH1330H21AD
GPH1330H21A
GPH1336H21AB
GPH1336H21AC
GPH1336H21AD
GPH1336H21AE
GPH1336H21A
GPH1342H21AB
GPH1342H21AC
GPH1342H21AD
GPH1342H21AE
GPH1342H21A
GPH1348H21AB
GPH1348H21AC
GPH1348H21AD
GPH1348H21A
GPH1360H21AA
GPH1360H21AB
GPH1360H21AC
GPH1360H21AD

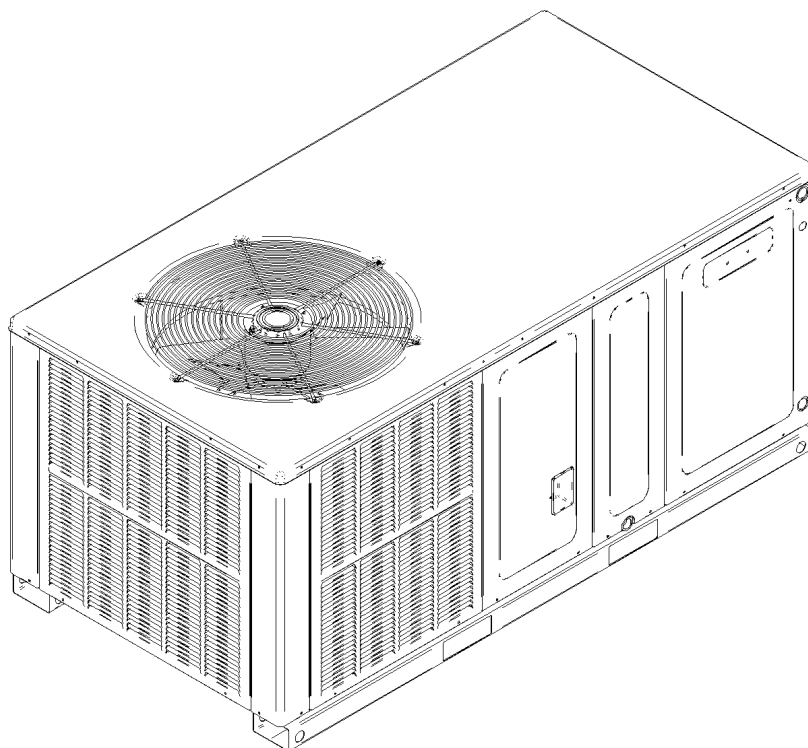

This manual is to be used by qualified technicians only.

This manual replaces RP-359K.

© 2005-2009 Goodman Manufacturing Company, L.P. ♦ 5151 San Felipe, Suite 500 ♦ Houston, TX 77056

Important Information

Index

Functional Parts List	3
Illustration and Parts	4 - 13

Views shown are for parts illustrations only, not servicing procedures.

Rev. L: Added models GPH1324H21AD, GPH1348H21AD, and GPH1360H21AD.

Text Codes:

AR - As Required

NA - Not Available

NS - Not Shown

00000000 - See Note

QTY - Quantity Example (QTY 3) (If Quantity not shown, Quantity = 1)

M - Model Example (M1) (If M Code not shown, then part is used on all Models)

Expanded Model Nomenclature:

Example M1 - Model#1 M2 - Model#2 M3 - Model#3

Goodman Manufacturing Company, L.P. is not responsible for personal injury or property damage resulting from improper service. Review all service information before beginning repairs.

Warranty service must be performed by an authorized technician, using authorized factory parts. If service is required after the warranty expires, Goodman Manufacturing Company, L.P. also recommends contacting an authorized technician and using authorized factory parts.

Goodman Manufacturing Company, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

For assistance within the U.S.A. contact:
Consumer Affairs Department
Goodman Manufacturing Company, L.P.
7401 Security Way
Houston, Texas 77040
877-254-4729-Telephone
713-863-2382-Facsimile

For assistance outside the U.S.A. contact:
International Division
Goodman Manufacturing Company, L.P.
7401 Security Way
Houston, Texas 77040
713-861-2500-Telephone
713-863-2382-Facsimile


Functional Parts

Part

No: Description:

0130M00014	240 VOLT RELAY (M1, M2, M3, M5, M6, M7, M9, M10, M11, M12, M14, M15, M16, M17, M19, M20, M21)	CONT2P030024VS	CONTACTOR 30 AMP, 2P, 24V (M14, M15, M16, M17, M19, M20, M21)
0130M00025S	24V RELAY (M23)	CONT2P030024VS	CONTACTOR 30 AMP, 2P, 24V (M18, M22)
B1226206	ACCUMULATOR (M1, M2, M3, M4, M5, M6, M7, M8)	CONT2P040024VS	CONTACTOR 40 AMP, 2P, 24V (M23, M24, M25, M26)
B1226207	ACCUMULATOR .875 (M9, M10, M11, M12, M13, M14, M15, M16, M17, M18, M19, M20, M21, M22, M23, M24, M25, M26)	0130M00013	CUT-OUT SWITCH, LOW PRESSURE OPEN 7°, CLOSE 25°
0131M00010PS	BLOWER MOTOR 1/2 HP, 3 SP, 8 PL (M14, M15, M16, M17, M18, M19, M20, M21, M22)	PCBDM101S	DEFROST CONTROL BOARD
11091202S	BLOWER MOTOR 1/3 HP, 3 SP, 6 PL (M5, M6, M7, M8, M9, M10, M11, M12, M13)	0130M00057	DEFROST THERMOSTAT (M3, M21, M26)
11091207S	BLOWER MOTOR 1/4 HP, 3 SP, 8 PL (M1, M2, M3, M4)	0130M00009P	DEFROST THERMOSTAT OPEN 60°, CLOSE 34° (M1, M2, M4, M5, M6, M7, M8)
0231K00042	BLOWER MOTOR 3/4 HP PROGRAMMED X13 (M24, M25, M26)	0130M00001P	DEFROST THERMOSTAT OPEN 75°, CLOSE 31° (M9, M10, M11, M12, M13, M14, M15, M16, M17, M18, M19, M20, M22, M23, M24, M25)
0231K00039	BLOWER MOTOR 3/4 HP PROGRAMMED X13 (M23)	B1141643	TRANSFORMER 208/230, 24V
PCBFM103S	BOARD, ELECTRONIC BLOWER TIME DELAY RELAY (M1, M2, M3, M4, M5, M6, M7, M8, M9, M10, M11, M12, M13, M14, M15, M16, M17, M18, M19, M20, M21, M22)	SPECIAL PARTS	
CAP100000370VAS	CAPACITOR 10/370V [BLOWER] (M1, M2, M3, M4, M5, M6, M7, M8, M9, M10, M11, M12, M13)	B10259251	LABEL, GOODMAN
CAP150000370VAS	CAPACITOR 15/370V [BLOWER] (M14, M15, M16, M17, M18, M19, M20, M21, M22)	RP-359L	REPAIR PARTS MANUAL
CAP050350440RSS	CAPACITOR 5/35/440V [CONTROL BOX] (M1, M2, M3, M4, M9, M10, M11, M12, M13)	B1757910	SUPPLEMENTAL INSERT (EBTDR)
CAP050400370RSS	CAPACITOR 5/40/370V [CONTROL BOX] (M5, M6, M7, M8)	Expanded Model Nomenclature	
CAP050500440RTS	CAPACITOR 5/50/440V [CONTROL BOX] (M14, M15, M16, M17, M18)	M1 - GPH1324H21AB M2 - GPH1324H21AC M3 - GPH1324H21AD M4 - GPH1324H21A M5 - GPH1330H21AB M6 - GPH1330H21AC M7 - GPH1330H21AD M8 - GPH1330H21A M9 - GPH1336H21AB M10 - GPH1336H21AC M11 - GPH1336H21AD M12 - GPH1336H21AE M13 - GPH1336H21A M14 - GPH1342H21AB M15 - GPH1342H21AC M16 - GPH1342H21AD M17 - GPH1342H21AE M18 - GPH1342H21A M19 - GPH1348H21AB M20 - GPH1348H21AC M21 - GPH1348H21AD M22 - GPH1348H21A M23 - GPH1360H21AA M24 - GPH1360H21AB M25 - GPH1360H21AC M26 - GPH1360H21AD	
CAP050600440RTS	CAPACITOR 5/60/440V [CONTROL BOX] (M19, M20, M21, M22)		
CAP050800440RTS	CAPACITOR 5/80/440V [CONTROL BOX] (M23, M24, M25, M26)		
ZR24K4PFV930	COMPRESSOR 24000, 208/230/60/1 (M1, M2, M3, M4)		
ZR26K3PFV930	COMPRESSOR 26600, 208/230/60/1 (M5, M6, M7, M8)		
CR31K7PFV970	COMPRESSOR 30700, 208/230/60/1 (M9, M10, M11, M12, M13)		
ZR36K3PFV930	COMPRESSOR 36900, 208/230/60/1 (M14, M15, M16, M17, M18)		
ZR42K3PFV930	COMPRESSOR 42800, 208/230/60/1 (M19, M20, M21, M22)		
ZR52K3PFV930	COMPRESSOR 52000, 208/230/60/1 (M26)		
ZR54K3PFV930	COMPRESSOR 55000, 208/230/60/1 (M23, M24, M25)		
0131M00008PS	COND MOTOR 1/3 HP, 1 SP, 6 PL (M19, M20, M22, M23, M24, M25)		
0131M00007PS	COND MOTOR 1/4 HP, 1 SP, 6 PL (M13, M18, M21, M26)		
0131M00014PS	COND MOTOR 1/4 HP, 1 SP, 8 PL (M9, M10, M11, M12, M14, M15, M16, M17)		
0131M00009PS	COND MOTOR 1/6 HP, 1 SP, 8 PL (M1, M2, M3, M4, M5, M6, M7, M8)		
CONT2P025024VS	CONTACTOR 25 AMP, 2P, 24V (M1, M2, M3, M4, M5, M6, M7, M8, M9, M10, M11, M12, M13)		

CABINET

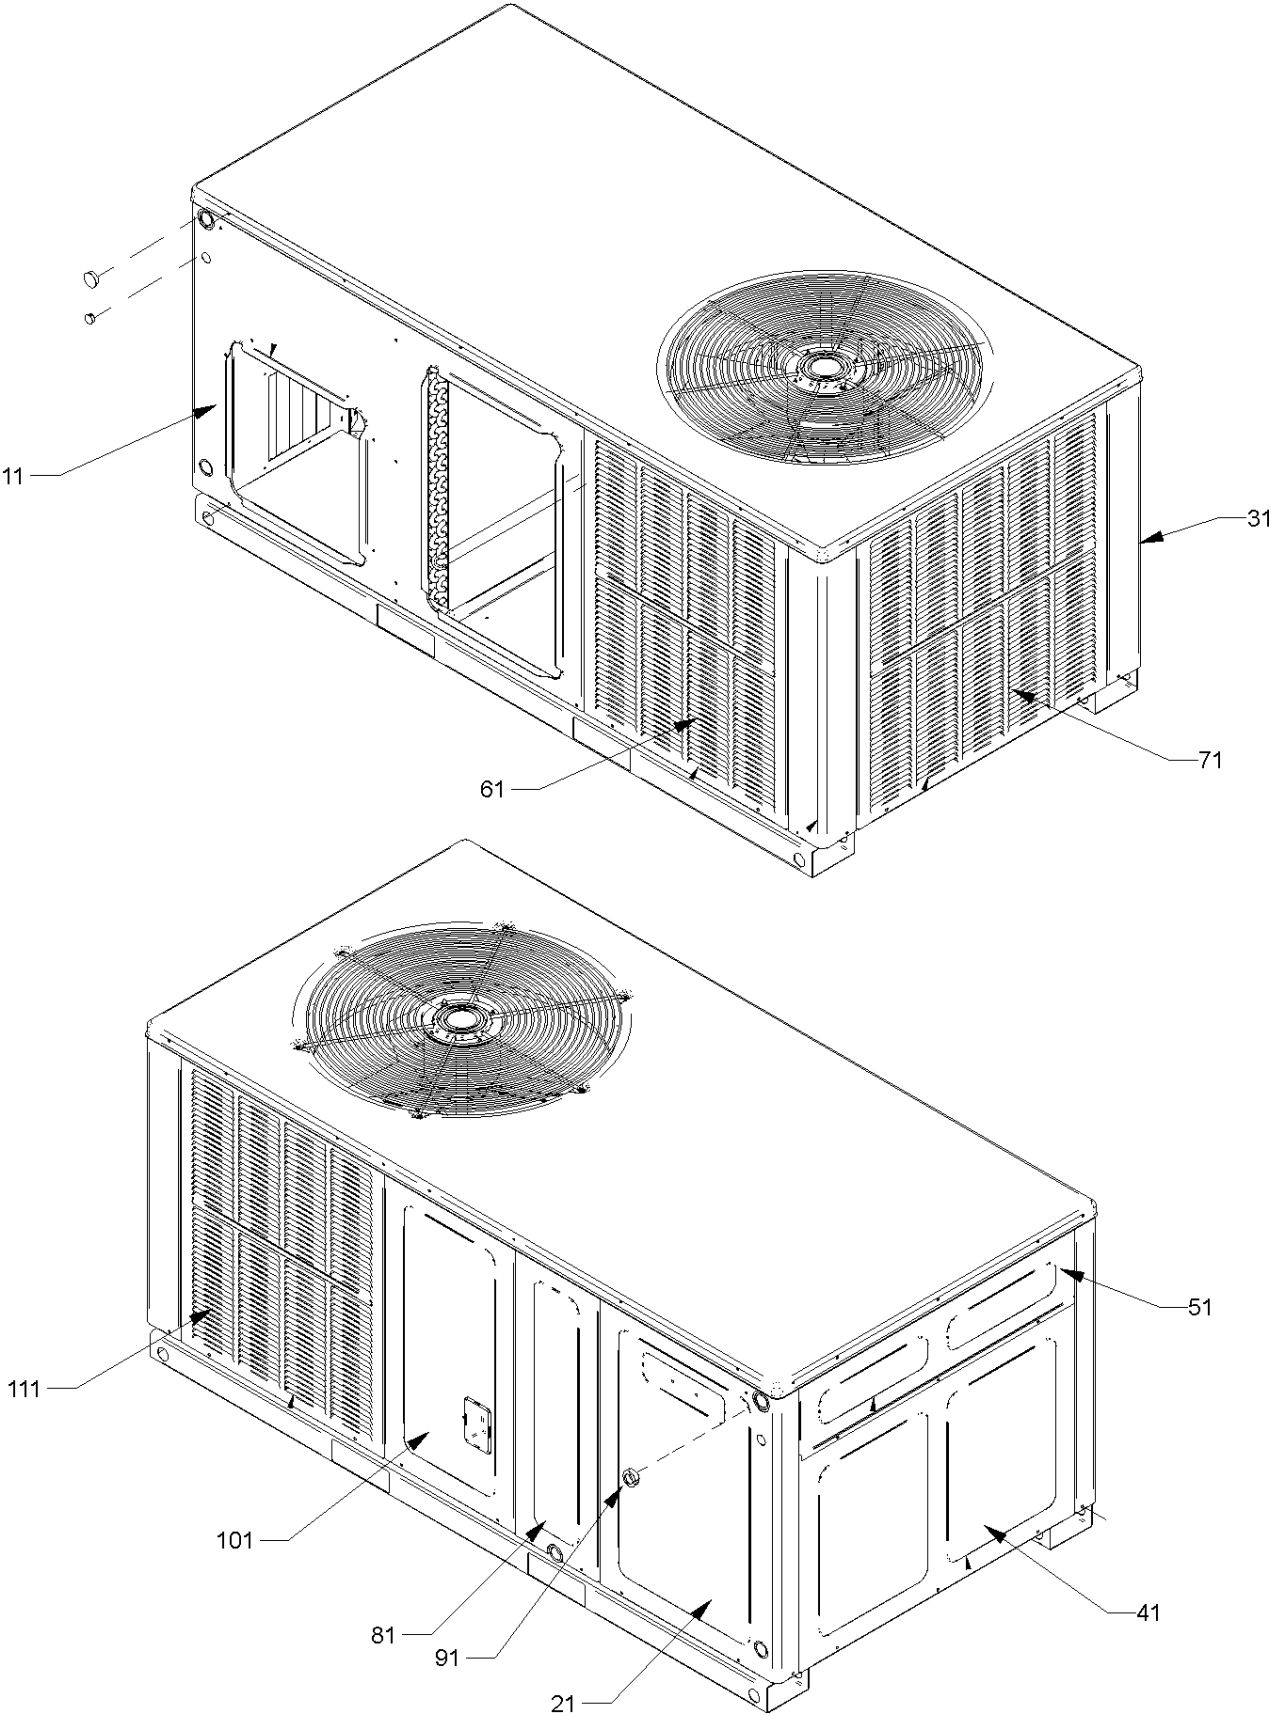

CABINET

**Ref. Part
No: No:**

Description:

Image 1:

11	0270G00008PS	INSULATED ASSY, DUCT PANEL 27.5" (M1, M2, M3, M4, M5, M6, M7, M8)
11	0270G00009PS	INSULATED ASSY, DUCT PANEL 32.5" (M9, M10, M11, M12, M13, M14, M15, M16, M17, M18)
11	0270G00010PS	INSULATED ASSY, DUCT PANEL 36" (M19, M20, M21, M22, M23, M24, M25, M26)
21	0270G00011PS	INSULATED ASSY, CORNER PANEL 27.5" (M1, M2, M3, M4, M5, M6, M7, M8)
21	0270G00012PS	INSULATED ASSY, CORNER PANEL 32.5" (M9, M10, M11, M12, M13, M14, M15, M16, M17, M18)
21	0270G00013PS	INSULATED ASSY, CORNER PANEL 36" (M19, M20, M21, M22, M23, M24, M25, M26)
31	0121G00047PDG	CORNER POST 27.5" (M1, M2, M3, M4, M5, M6, M7, M8)
31	0121G00048PDG	CORNER POST 32.5" (M9, M10, M11, M12, M13, M14, M15, M16, M17, M18)
31	0121G00082PDGS	CORNER POST 36" (M19, M20, M21, M22, M23, M24, M25, M26)
41	0270G00113S	INSULATED ASSY, BLOWER DOOR 27.5" (M1, M2, M3, M4, M5, M6, M7, M8)
41	0270G00114S	INSULATED ASSY, BLOWER DOOR 32.5" (M9, M10, M11, M12, M13, M14, M15, M16, M17, M18)
41	0270G00115S	INSULATED ASSY, BLOWER DOOR 36" (M19, M20, M21, M22, M23, M24, M25, M26)
51	0121G00276DG	EXTERNAL CONTROL BOX PANEL
61	0121G00069PDG	LOUVERED PANEL 4 BANK 27.5" (M1, M2, M3, M4, M5, M6, M7, M8)
61	0121G00070PDGS	LOUVERED PANEL 4 BANK 32.5" (M9, M10, M11, M12, M13, M14, M15, M16, M17, M18)
61	0121G00090PDG	LOUVERED PANEL 4 BANK 36" (M19, M20, M21, M22, M23, M24, M25, M26)
71	0121G00072PDGS	LOUVERED PANEL 5 BANK 27.5" (M1, M2, M3, M4, M5, M6, M7, M8)
71	0121G00073PDG	LOUVERED PANEL 5 BANK 32.5" (M9, M10, M11, M12, M13, M14, M15, M16, M17, M18)
71	0121G00091PDG	LOUVERED PANEL 5 BANK 36" (M19, M20, M21, M22, M23, M24, M25, M26)
81	0270G00017PS	INSULATED ASSY, EVAP PANEL 27.5" (M1, M2, M3, M4, M5, M6, M7, M8)
81	0270G00018PS	INSULATED ASSY, EVAP PANEL 32.5" (M9, M10, M11, M12, M13, M14, M15, M16, M17, M18)
81	0270G00019PS	INSULATED ASSY, EVAP PANEL 36" (M19, M20, M21, M22, M23, M24, M25, M26)
91	B1392011	GROMMET / HS .62 - .45
101	0121G00062PDG	COMPRESSOR PANEL 13.68" X 27.50" (M3, M5, M6, M8)
101	0121G00063PDG	COMPRESSOR PANEL 13.68" X 32.50" (M9, M10, M11, M13)
101	0121G00059PDGS	COMPRESSOR PANEL 8.75" X 27.50" (M1, M2, M4, M7)
101	0121G00060PDG	COMPRESSOR PANEL 8.75" X 32.50" (M12, M14, M15, M16, M17, M18)
101	0121G00087PDG	COMPRESSOR PANEL 8.75" X 36" (M19, M20, M21, M22, M23, M24, M25, M26)
111	0121G00069PDG	LOUVERED PANEL 4 BANK 27.5" (M3, M5, M6, M8)

**Ref. Part
No: No:**

Description:


Image 1:

111	0121G00070PDGS	LOUVERED PANEL 4 BANK 32.5" (M9, M10, M11, M13)
111	0121G00072PDGS	LOUVERED PANEL 5 BANK 27.5" (M1, M2, M4, M7)
111	0121G00073PDG	LOUVERED PANEL 5 BANK 32.5" (M12, M14, M15, M16, M17, M18)
111	0121G00091PDG	LOUVERED PANEL 5 BANK 36" (M19, M20, M21, M22, M23, M24, M25, M26)
NS	B10259251	LABEL, GOODMAN

Expanded Model Nomenclature

M1 - GPH1324H21AB
M2 - GPH1324H21AC
M3 - GPH1324H21AD
M4 - GPH1324H21A
M5 - GPH1330H21AB
M6 - GPH1330H21AC
M7 - GPH1330H21AD
M8 - GPH1330H21A
M9 - GPH1336H21AB
M10 - GPH1336H21AC
M11 - GPH1336H21AD
M12 - GPH1336H21AE
M13 - GPH1336H21A
M14 - GPH1342H21AB
M15 - GPH1342H21AC
M16 - GPH1342H21AD
M17 - GPH1342H21AE
M18 - GPH1342H21A
M19 - GPH1348H21AB
M20 - GPH1348H21AC
M21 - GPH1348H21AD
M22 - GPH1348H21A
M23 - GPH1360H21AA
M24 - GPH1360H21AB
M25 - GPH1360H21AC
M26 - GPH1360H21AD

CHASSIS

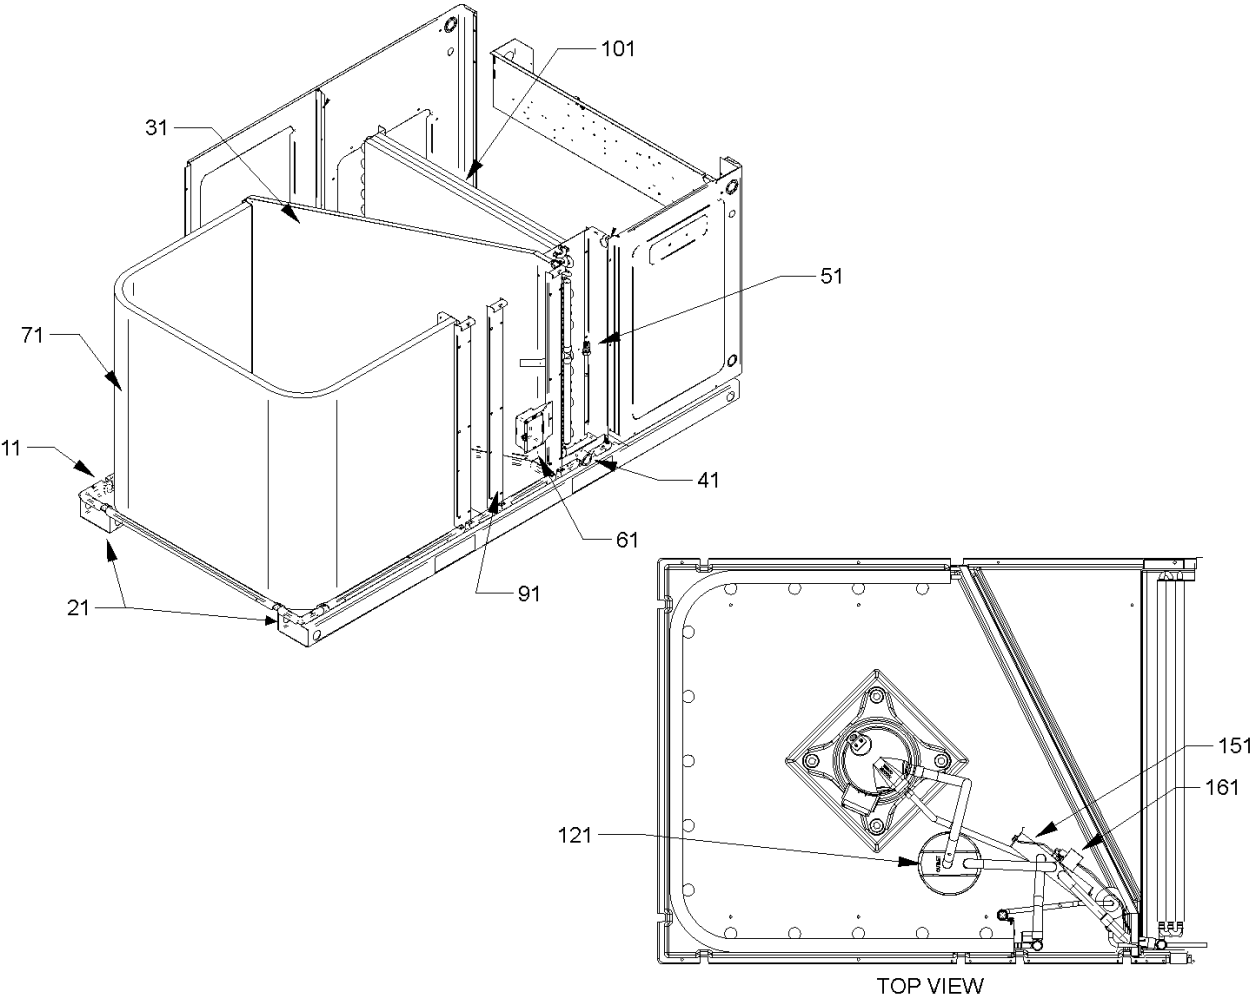

CHASSIS

Ref. Part No: No:			Ref. Part No: No:		
Description:			Description:		
Image 1:			Image 1:		
11	0121G00046PS	INSULATED ASSY, BASEPAN	101	0202G00142S	TUBING ASSY, EVAP COIL (M14, M15, M16, M17, M18)
21	0121G00044PRF	BASEPAN RAIL (QTY 2)	101	0202G00213S	TUBING ASSY, EVAP COIL (M12)
31	0270G00075	INSULATED ASSY, PARTITION PANEL 27.5" (M1, M2, M3, M4, M5, M6, M7, M8)	121	B1226206	ACCUMULATOR (M1, M2, M3, M4, M5, M6, M7, M8)
31	0270G00076	INSULATED ASSY, PARTITION PANEL 32.5" (M9, M10, M11, M12, M13, M14, M15, M16, M17, M18)	121	B1226207	ACCUMULATOR .875 (M9, M10, M11, M12, M13, M14, M15, M16, M17, M18, M19, M20, M21, M22, M23, M24, M25, M26)
31	0270G00077	INSULATED ASSY, PARTITION PANEL 36" (M19, M20, M21, M22, M23, M24, M25, M26)	151	B1227316S	REVERSING VALVE (M1, M2, M3, M4, M5, M6, M7, M8)
41	0270G00004PS	DRAIN PAN ASSY	151	B1227317S	REVERSING VALVE (M9, M10, M11, M13, M14, M15, M16, M18)
51	0162M00061	FLOWRATOR .065 [EVAP] (M1, M2, M3, M4)	151	B1227318S	REVERSING VALVE (M12, M17, M19, M20, M21, M22, M23, M24, M25, M26)
51	0162M00062	FLOWRATOR .067 [EVAP] (M5, M6, M7, M8)	161	B1225022S	SOLENOID COIL, REVERSING VALVE
51	0162M00011P	FLOWRATOR .073 [EVAP] (M9, M10, M11, M13)	NS	B1219204	BI-FLOW FILTER DRIER, STEEL
51	0162M00076S	FLOWRATOR .076 [EVAP] (M12)	NS	0130M00013	CUT-OUT SWITCH, LOW PRESSURE OPEN 7°, CLOSE 25°
51	0162M00010P	FLOWRATOR .080 [COND] (M23, M24, M25)	NS	0121G00043P	EVAP DRIP SHIELD
51	0162M00064	FLOWRATOR .080 [EVAP] (M14, M15, M16, M17, M18)	Expanded Model Nomenclature		
51	0162M00072	FLOWRATOR .082 [EVAP] (M19, M20, M21, M22)			
51	0162M00067	FLOWRATOR .092 (M26)	M1 - GPH1324H21AB M2 - GPH1324H21AC M3 - GPH1324H21AD M4 - GPH1324H21A M5 - GPH1330H21AB M6 - GPH1330H21AC M7 - GPH1330H21AD M8 - GPH1330H21A M9 - GPH1336H21AB M10 - GPH1336H21AC M11 - GPH1336H21AD M12 - GPH1336H21AE M13 - GPH1336H21A M14 - GPH1342H21AB M15 - GPH1342H21AC M16 - GPH1342H21AD M17 - GPH1342H21AE M18 - GPH1342H21A M19 - GPH1348H21AB M20 - GPH1348H21AC M21 - GPH1348H21AD M22 - GPH1348H21A M23 - GPH1360H21AA M24 - GPH1360H21AB M25 - GPH1360H21AC M26 - GPH1360H21AD		
61	0210G00008P	PROCESS TUBING ASSY			
71	0201G00145	COND COIL TUBING ASSY (M21)			
71	0201G00146	COND COIL TUBING ASSY (M3)			
71	0201G00053PS	TUBING ASSY, COND COIL (M9, M10, M13)			
71	0201G00101S	TUBING ASSY, COND COIL (M2)			
71	0201G00102S	TUBING ASSY, COND COIL (M5, M6, M8)			
71	0201G00104S	TUBING ASSY, COND COIL (M16)			
71	0201G00105S	TUBING ASSY, COND COIL (M20)			
71	0201G00106S	TUBING ASSY, COND COIL (M25)			
71	0201G00111S	TUBING ASSY, COND COIL (M12)			
71	0201G00114S	TUBING ASSY, COND COIL (M7)			
71	0201G00115S	TUBING ASSY, COND COIL (M17)			
71	0201G00141S	TUBING ASSY, COND COIL (M26)			
71	1362700	TUBING ASSY, COND COIL (M1, M4)			
71	1362702	TUBING ASSY, COND COIL (M11)			
71	1362703	TUBING ASSY, COND COIL (M14, M15, M18)			
71	1362704	TUBING ASSY, COND COIL (M19, M22)			
71	1362705	TUBING ASSY, COND COIL (M23, M24)			
91	0121G00045P	POST 27.5" (M1, M2, M3, M4, M5, M6, M7, M8)			
91	0121G00079P	POST 32.5" (M9, M10, M11, M12, M13, M14, M15, M16, M17, M18)			
91	0121G00083P	POST 36" (M19, M20, M21, M22, M23, M24, M25, M26)			
101	0202G00075PS	TUBING ASSY, EVAP COIL (M9, M10, M11, M13)			
101	0202G00078PS	TUBING ASSY, EVAP COIL (M5, M6, M7, M8)			
101	0202G00135S	TUBING ASSY, EVAP COIL (M26)			
101	0202G00136S	TUBING ASSY, EVAP COIL (M1, M2, M3, M4)			
101	0202G00138S	TUBING ASSY, EVAP COIL (M23, M24, M25)			
101	0202G00139S	TUBING ASSY, EVAP COIL (M19, M20, M21, M22)			

COMPRESSOR AND TOP PANEL

Image 1

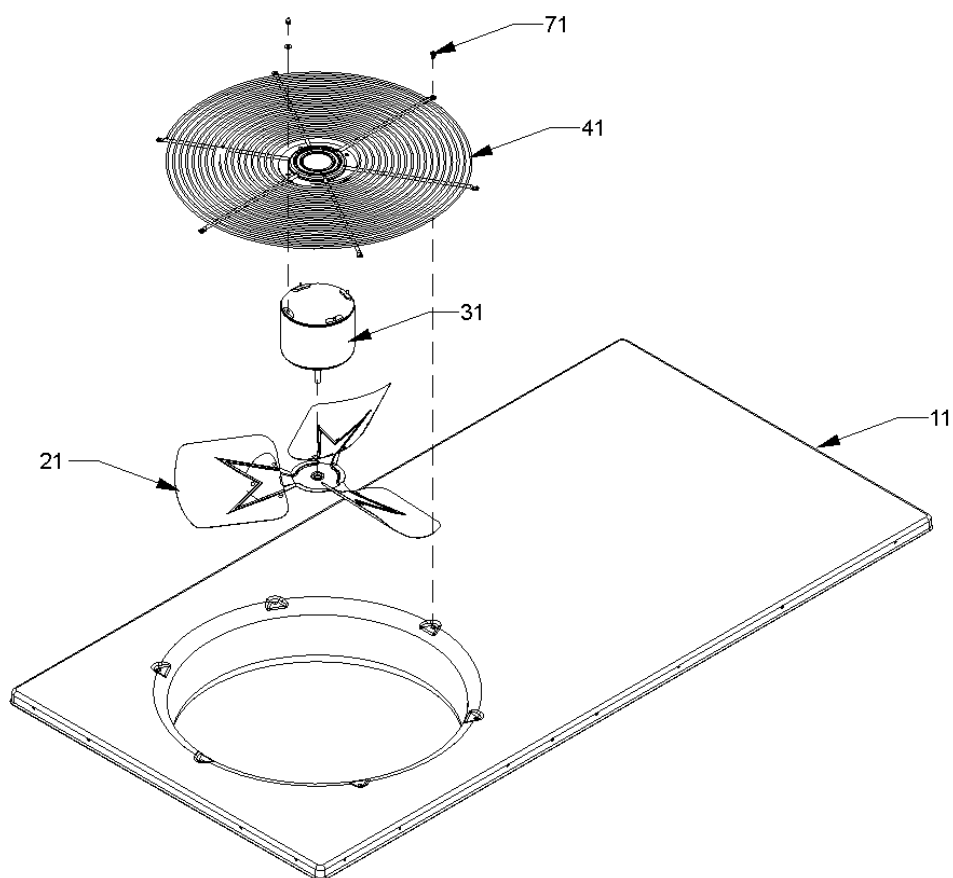


Image 2


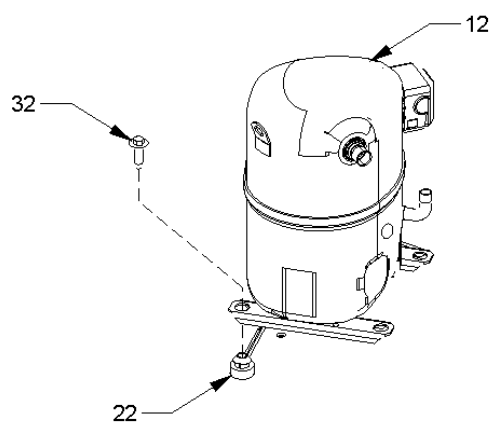


Image 3

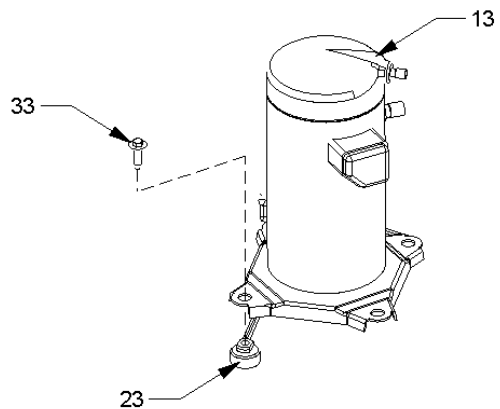

COMPRESSOR AND TOP PANEL

Ref. Part

No: No:

Description:

Ref. Part

No: No:

Description:

Image 1:

11	0274G00003PS	INSULATED ASSY, TOP PANEL (M1, M4, M5, M8, M9, M10, M13, M14, M15, M18, M19, M22, M23, M24)
11	0274G00037	INSULATED ASSY, TOP PANEL (M2, M3, M6, M7, M11, M12, M16, M17, M20, M21, M25, M26)
21	0150G00001S	FAN BLADE (M19, M20, M21, M22, M23, M24, M25, M26)
21	B1086775S	FAN BLADE (M1, M2, M3, M4, M5, M6, M7, M8, M13, M18)
21	B1086765S	FAN BLADE TYPE 3 (M9, M10, M11, M12, M14, M15, M16, M17)
31	0131M00008PS	COND MOTOR 1/3 HP, 1 SP, 6 PL (M19, M20, M22, M23, M24, M25)
31	0131M00007PS	COND MOTOR 1/4 HP, 1 SP, 6 PL (M13, M18, M21, M26)
31	0131M00014PS	COND MOTOR 1/4 HP, 1 SP, 8 PL (M9, M10, M11, M12, M14, M15, M16, M17)
31	0131M00009PS	COND MOTOR 1/6 HP, 1 SP, 8 PL (M1, M2, M3, M4, M5, M6, M7, M8)
41	0152G00002S	FAN GRILLE
71	0163M00006P	ACORN NUT 5/16 HEX BLACK (QTY 4)
NS	17788000083F	PVC CONDUIT 8.25"

Image 2:

12	CR31K7PFV970	COMPRESSOR 30700, 208/230/60/1 (M9, M10, M11, M12, M13)
22	B1339530	COMPRESSOR GROMMET (M9, M10, M11, M12, M13)
32	M0221641	TF SHOULDER SCREW (M9, M10, M11, M12, M13)
NS	B1488815S	COMPRESSOR SOUND BLANKET (M9, M10, M11, M12, M13)

Image 3:

13	ZR24K4PFV930	COMPRESSOR 24000, 208/230/60/1 (M1, M2, M3, M4)
13	ZR26K3PFV930	COMPRESSOR 26600, 208/230/60/1 (M5, M6, M7, M8)
13	ZR36K3PFV930	COMPRESSOR 36900, 208/230/60/1 (M14, M15, M16, M17, M18)
13	ZR42K3PFV930	COMPRESSOR 42800, 208/230/60/1 (M19, M20, M21, M22)
13	ZR52K3PFV930	COMPRESSOR 52000, 208/230/60/1 (M26)
13	ZR54K3PFV930	COMPRESSOR 55000, 208/230/60/1 (M23, M24, M25)
23	B1339533	COMPRESSOR GROMMET (M1, M2, M3, M4, M5, M6, M7, M8, M14, M15, M16, M17, M18, M19, M20, M21, M22, M23, M24, M25, M26)
33	M0221641	TF SHOULDER SCREW (M1, M2, M3, M4, M5, M6, M7, M8, M14, M15, M16, M17, M18, M19, M20, M21, M22, M23, M24, M25, M26)
NS	B1488807S	COMPRESSOR SOUND BLANKET (M14)

Expanded Model Nomenclature

M1 - GPH1324H21AB
M2 - GPH1324H21AC
M3 - GPH1324H21AD
M4 - GPH1324H21A
M5 - GPH1330H21AB
M6 - GPH1330H21AC
M7 - GPH1330H21AD
M8 - GPH1330H21A
M9 - GPH1336H21AB
M10 - GPH1336H21AC
M11 - GPH1336H21AD
M12 - GPH1336H21AE
M13 - GPH1336H21A
M14 - GPH1342H21AB
M15 - GPH1342H21AC
M16 - GPH1342H21AD
M17 - GPH1342H21AE
M18 - GPH1342H21A
M19 - GPH1348H21AB
M20 - GPH1348H21AC
M21 - GPH1348H21AD
M22 - GPH1348H21A
M23 - GPH1360H21AA
M24 - GPH1360H21AB
M25 - GPH1360H21AC
M26 - GPH1360H21AD

CONTROL BOX and MISC.

Image 1

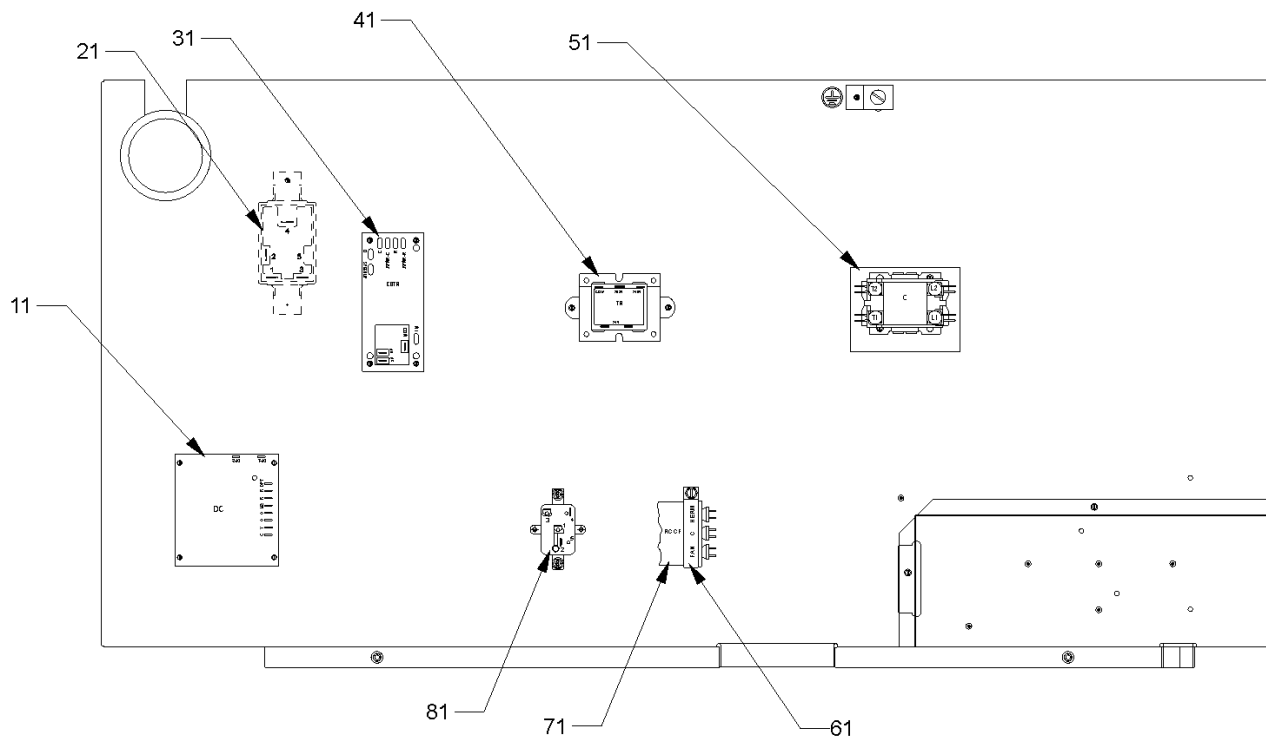


Image 2


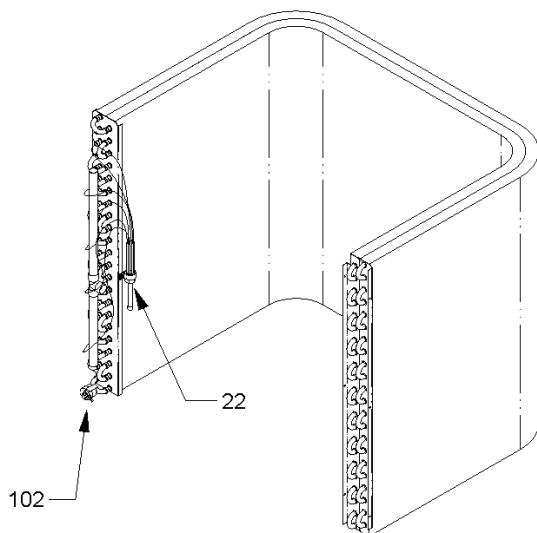


Image 3

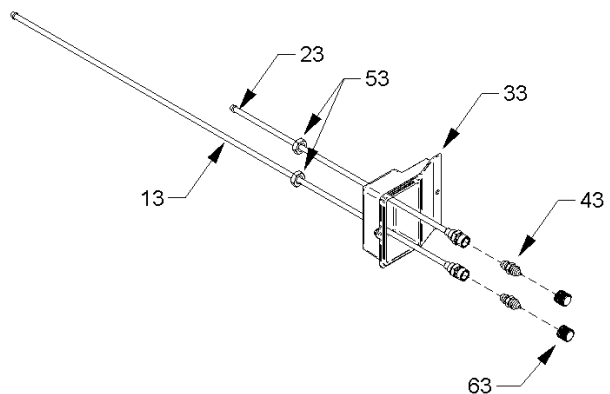

CONTROL BOX and MISC.

Ref. Part No: No:	Description:	Ref. Part No: No:	Description:
<i>Image 1:</i>		<i>Image 2:</i>	
11	PCBDM101S	DEFROST CONTROL BOARD	
21	0130M00025S	24V RELAY (M23)	
31	PCBFM103S	BOARD, ELECTRONIC BLOWER TIME DELAY RELAY (M1, M2, M3, M4, M5, M6, M7, M8, M9, M10, M11, M12, M13, M14, M15, M16, M17, M18, M19, M20, M21, M22)	DEFROST THERMOSTAT OPEN 75°, CLOSE 31° (M9, M10, M11, M12, M13, M14, M15, M16, M17, M18, M19, M20, M22, M23, M24, M25)
41	B1141643	TRANSFORMER 208/230, 24V	
51	CONT2P025024VS	CONTACTOR 25 AMP, 2P, 24V (M1, M2, M3, M4, M5, M6, M7, M8, M9, M10, M11, M12, M13)	
51	CONT2P030024VS	CONTACTOR 30 AMP, 2P, 24V (M18, M22)	
51	CONT2P030024VS	CONTACTOR 30 AMP, 2P, 24V (M14, M15, M16, M17, M19, M20, M21)	
51	CONT2P040024VS	CONTACTOR 40 AMP, 2P, 24V (M23, M24, M25, M26)	
61	20520901	CAPACITOR STRAP	
71	CAP050350440RSS	CAPACITOR 5/35/440V [CONTROL BOX] (M1, M2, M3, M4, M9, M10, M11, M12, M13)	
71	CAP050400370RSS	CAPACITOR 5/40/370V [CONTROL BOX] (M5, M6, M7, M8)	
71	CAP050500440RTS	CAPACITOR 5/50/440V [CONTROL BOX] (M14, M15, M16, M17, M18)	
71	CAP050600440RTS	CAPACITOR 5/60/440V [CONTROL BOX] (M19, M20, M21, M22)	
71	CAP050800440RTS	CAPACITOR 5/80/440V [CONTROL BOX] (M23, M24, M25, M26)	
81	0130M00014	240 VOLT RELAY (M1, M2, M3, M5, M6, M7, M9, M10, M11, M12, M14, M15, M16, M17, M19, M20, M21)	
NS	0259G00000P	WIRE HARNESS, ELECTRIC HEAT (M4, M8, M13, M18, M22)	
NS	0259G000003	WIRE HARNESS, ELECTRIC HEAT (M23, M24, M25, M26)	
NS	0259G000005	WIRE HARNESS, ELECTRIC HEAT (M1, M2, M3, M5, M6, M7, M9, M10, M11, M12, M14, M15, M16, M17, M19, M20, M21)	
<i>Image 2:</i>		<i>Image 3:</i>	
22	B2114657	FLOWRATOR .057 [COND] (M5, M6, M8)	
22	B2114459	FLOWRATOR .059[COND] (M1, M2, M4)	
22	0162M00077	FLOWRATOR .061 [COND] (M7)	
22	0162M00017PS	FLOWRATOR .062 [COND] (M3)	
22	0162M00098S	FLOWRATOR .065 [COND] (M21)	
22	B2114665	FLOWRATOR .065 [EVAP] (M9, M10, M11, M13)	
22	0162M00075S	FLOWRATOR .067 [COND] (M12)	
22	0162M00012P	FLOWRATOR .071 [COND] (M19, M20, M22)	
22	B2114872	FLOWRATOR .072 [COND] (M14, M15, M16, M18)	
22	B2114872	FLOWRATOR .072 [COND] (M17)	
22	0162M00094S	FLOWRATOR .076 [COND] (M26)	
22	0162M00071S	FLOWRATOR .090 [EVAP] (M23, M24, M25)	
102	0130M00057	DEFROST THERMOSTAT (M3, M21, M26)	
102	0130M00009P	DEFROST THERMOSTAT OPEN 60°, CLOSE 34° (M1, M2, M4, M5, M6, M7, M8)	
		Expanded Model Nomenclature	
		M1 - GPH1324H21AB	
		M2 - GPH1324H21AC	
		M3 - GPH1324H21AD	
		M4 - GPH1324H21A	
		M5 - GPH1330H21AB	
		M6 - GPH1330H21AC	
		M7 - GPH1330H21AD	
		M8 - GPH1330H21A	
		M9 - GPH1336H21AB	
		M10 - GPH1336H21AC	
		M11 - GPH1336H21AD	
		M12 - GPH1336H21AE	
		M13 - GPH1336H21A	
		M14 - GPH1342H21AB	
		M15 - GPH1342H21AC	
		M16 - GPH1342H21AD	
		M17 - GPH1342H21AE	
		M18 - GPH1342H21A	
		M19 - GPH1348H21AB	
		M20 - GPH1348H21AC	
		M21 - GPH1348H21AD	
		M22 - GPH1348H21A	
		M23 - GPH1360H21AA	
		M24 - GPH1360H21AB	
		M25 - GPH1360H21AC	
		M26 - GPH1360H21AD	

BLOWER AND TRANSITION


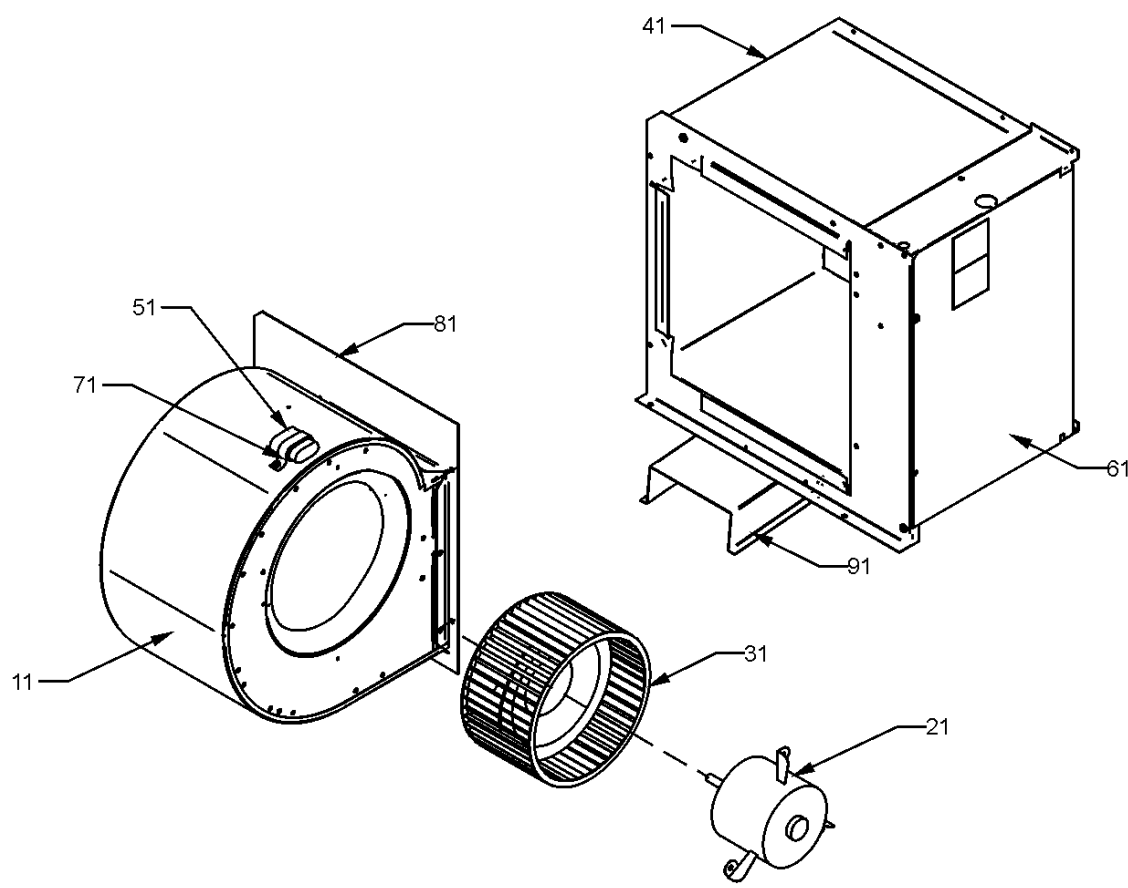


Image 2

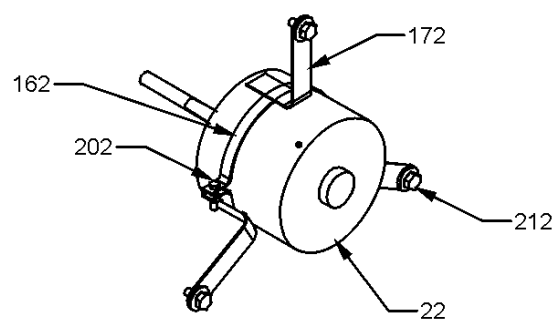

BLOWER AND TRANSITION

**Ref. Part
No: No:**

Description:

**Ref. Part
No: No:**

Description:

Image 1:

11	10324248	BLOWER HOUSING 10 X 8 (M14, M15, M16, M17, M18, M19, M20, M21, M22)
11	0271G00017	BLOWER HOUSING 11 X 8 (M23, M24, M25, M26)
11	10324246	BLOWER HOUSING 9 X 6 (M1, M2, M3, M4, M5, M6, M7, M8)
11	10324247	BLOWER HOUSING 9 X 8 (M9, M10, M11, M12, M13)
21	0131M00010PS	BLOWER MOTOR 1/2 HP, 3 SP, 8 PL (M14, M15, M16, M17, M18, M19, M20, M21, M22)
21	11091202S	BLOWER MOTOR 1/3 HP, 3 SP, 6 PL (M5, M6, M7, M8, M9, M10, M11, M12, M13)
21	11091207S	BLOWER MOTOR 1/4 HP, 3 SP, 8 PL (M1, M2, M3, M4)
31	B1368016S	BLOWER WHEEL 10 X 8 (M14, M15, M16, M17, M18, M19, M20, M21, M22)
31	B1368054	BLOWER WHEEL 11 X 8 (M23, M24, M25, M26)
31	0150M00000S	BLOWER WHEEL 9 X 6 (M5, M6, M7, M8)
31	B1368042S	BLOWER WHEEL 9 X 6 (M1, M2, M3, M4)
31	B1368036S	BLOWER WHEEL 9 X 8 (M9, M10, M11, M12, M13)
41	0270G00023PS	TRANSITION DUCT ASSY (M1, M2, M3, M4)
41	0270G00024PS	TRANSITION DUCT ASSY (M5, M6, M7, M8, M9, M10, M11, M12, M13)
41	0270G00025PS	TRANSITION DUCT ASSY (M14, M15, M16, M17, M18, M19, M20, M21, M22, M23, M24, M25, M26)
51	CAP100000370VAS	CAPACITOR 10/370V [BLOWER] (M1, M2, M3, M4, M5, M6, M7, M8, M9, M10, M11, M12, M13)
51	CAP150000370VAS	CAPACITOR 15/370V [BLOWER] (M14, M15, M16, M17, M18, M19, M20, M21, M22)
61	0121G00039PS	HEATER KIT COVER
71	20520901	CAPACITOR STRAP (M1, M2, M3, M4, M5, M6, M7, M8, M9, M10, M11, M12, M13, M14, M15, M16, M17, M18, M19, M20, M21, M22)
81	0121G00128P	BLOWER MOUNT (M23, M24, M25, M26)
81	0121G00035P	BLOWER MOUNT 10 X 8 (M14, M15, M16, M17, M18, M19, M20, M21, M22)
81	0121G00033P	BLOWER MOUNT 9 X 6 (M1, M2, M3, M4, M5, M6, M7, M8)
81	0121G00034P	BLOWER MOUNT 9 X 8 (M9, M10, M11, M12, M13)
91	0121G00040P	BLOWER SUPPORT
NS	C6121802	BLOWER CUT-OFF (M1, M2, M3, M4, M5, M6, M7, M8)
NS	C6121810	BLOWER CUT-OFF (M9, M10, M11, M12, M13, M14, M15, M16, M17, M18, M19, M20, M21, M22)
NS	2964700	BLOWER CUT-OFF 11 X 8 (M23, M24, M25, M26)
NS	B821700	CAPACITOR BOOT (M1, M2, M3, M4, M5, M6, M7, M8, M9, M10, M11, M12, M13, M14, M15, M16, M17, M18, M19, M20, M21, M22)
NS	M0250558	TC SCREW (M1, M2, M3, M4, M5, M6, M7, M8, M9, M10, M11, M12, M13, M14, M15, M16, M17, M18, M19, M20, M21, M22)

Image 2:

22	0231K00039	BLOWER MOTOR 3/4 HP PROGRAMMED X13 (M23)
----	------------	--

Image 2:

22	0231K00042	BLOWER MOTOR 3/4 HP PROGRAMMED X13 (M24, M25, M26)
162	0121M00038	MOTOR MOUNT BAND (M23, M24, M25, M26)
172	B1376857	MOTOR MOUNT ARM (M23, M24, M25, M26)
202	B1393323	MACHINE SCREW HWH 1/4-20 X 1-1/2 BZ (M23, M24, M25, M26)
212	M0250565	TC SCREW 1.25" (M23, M24, M25, M26)
NS	B1393800	LOCKNUT, NYLON, INSERT 1/4, 20 (M23, M24, M25, M26)

Expanded Model Nomenclature

M1 - GPH1324H21AB
M2 - GPH1324H21AC
M3 - GPH1324H21AD
M4 - GPH1324H21A
M5 - GPH1330H21AB
M6 - GPH1330H21AC
M7 - GPH1330H21AD
M8 - GPH1330H21A
M9 - GPH1336H21AB
M10 - GPH1336H21AC
M11 - GPH1336H21AD
M12 - GPH1336H21AE
M13 - GPH1336H21A
M14 - GPH1342H21AB
M15 - GPH1342H21AC
M16 - GPH1342H21AD
M17 - GPH1342H21AE
M18 - GPH1342H21A
M19 - GPH1348H21AB
M20 - GPH1348H21AC
M21 - GPH1348H21AD
M22 - GPH1348H21A
M23 - GPH1360H21AA
M24 - GPH1360H21AB
M25 - GPH1360H21AC
M26 - GPH1360H21AD

