


MODEL LP510RSL LO PROFILE VENTILATION FAN

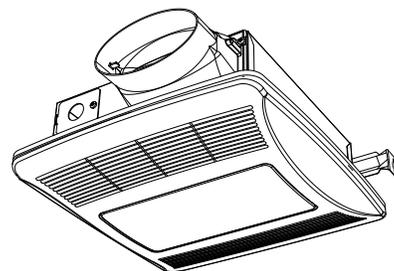

DESCRIPTION

BLOWER:

- Infinitely adjustable low cfm setting allows precise adjustment to prevent over-ventilating and maximize efficiency.
- It will be 20 mins timer delay before returning to a continuous lower speed.
- DC motor for efficiency well beyond ENERGY STAR requirement. - rated for continuous operation.
- Multi-speed capability ideal for meeting ASHRAE 62.2, LEED and ENERGY STAR for homes. Requirements, Can be used to comply with CA Title 24, as well as local/spot ventilation needs.

HOUSING:

- Rugged, galvanized steel construction
- Plastic, 4" oval duct connector
- Optional 4" oval to 3" round duct adapter sold separately (part no. S1110515)
- 3-3/8" height allows for 2" x 4" wall or ceiling installation
- Sturdy, easy, mounting directly to stud or joist
- Can be mounted in flat ceilings, sloped ceilings up to 12/12 pitch, and walls

GRILLE:

- Polymeric construction
- Energy efficient lighting-10W LED 4000K 840 Lumens.

Can be used to ventilate excess heat and humidity from single family, residential garages.

cETL-us Listed for use over bathtubs and showers when connected to a GFCI protected branch circuit (ceiling mount only).

1-Year Warranty

TYPICAL SPECIFICATION

- The fan incorporates a humidity control that uses a sophisticated humidity sensor that responds to humidity levels that exceed the users desired set point.
- Humidity sensor allows you to adjust the humidity levels between 30%-80%.
- When the humidity exceeds the desired users set point the fan will elevate to high speed operation.
- The humidity sensor conserves energy by allowing the fan to operate only when required.
- Fan shall have corrosion resistant galvanized steel housing. It shall be ducted to a roof or wall cap using 4" round ductwork.
- Blower assembly shall be removable, have a centrifugal-type blower wheel and a DC motor designed for continuous operation.
- Plastic damper/duct connector shall be included.
- Multi-speed 50/80/100 CFM no greater than 1.2 Sones. All air and sound ratings shall be certified by HVI.
- Fan shall be ENERGY STAR® qualified and have an energy efficient DC motor.
- Fan shall be cETL-us Listed for use over bathtubs and showers when connected to a GFCI protected branch circuit (ceiling mount only).



Broan-NuTone LLC Hartford, Wisconsin www.broan-nutone.com 800-558-1711
 Venmar Ventilation ULC Drummondville Québec www.broan-nutone.ca 877-896-1119

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

PERFORMANCE RATINGS MODEL LP510RSL

LO PROFILE VENTILATION FAN

HVI PERFORMANCE

Model No.	Nominal voltage	Performance @ Static Pressure (Ps) - Inches Water Gage				Duct size	Hz
		0.100" Ps			0.250" Ps		
		CFM	Sones	Power (Watts)	CFM		
LP510RSL	120	100	1.2	11.0	96	4"	60
		80	0.9	7.0	80		
		50	0.4	5.0	52		



HVI PERFORMANCE

AMPS


Model	Amps
LP510RSL	0.35

WEIGHT

Model	Shipping Weight
LP510RSL	7.5 lbs.

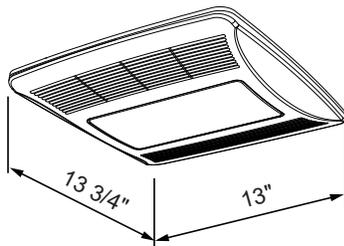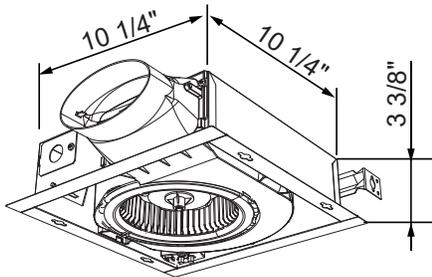

AIR FLOW PERFORMANCE

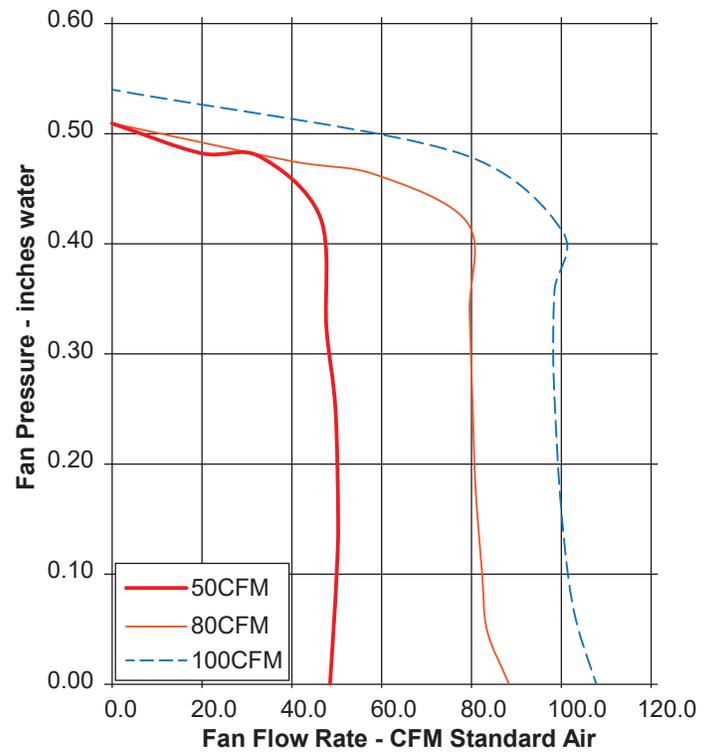

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



Broan-NuTone LLC Hartford, Wisconsin www.broan-nutone.com 800-558-1711
 Venmar Ventilation ULC Drummondville Québec www.broan-nutone.ca 877-896-1119