

29-1019LF Supply Valve

Specification Sheet

FEATURES & BENEFITS

29-1019LF

- Chrome Plated Lead Free
- NSF & UPC Approved
- 125 PSI
- Angle
- Temp. Rating: 32°F - 140°F
- 5/8" OD Compression X 3/8" OD Compression

29-1019BLF

- Same As Above - Unplated Brass




MATERIAL SPECIFICATIONS

No.	Part	Material
1	Bolt	JIS 3260 C2600W
2	Handle	Zinc Alloy Z30A
3	Bonnet	Brass B124 C37700
4	Packing	EPDM SN-719F
5	Washer	Stainless Steel 304
6	Stem	Plastic
7	Seat Packing	EPDM SN-719F
8	Sleeve	Brass C89550
9	Packing Nut	Brass B124 C37700
10	Body	Brass C89550
11	Packing Nut	Brass B124 C37700
12	Sleeve	Brass C89550

DIMENSIONS

H	L	L1	D
2.29	1.57	0.91	2.02

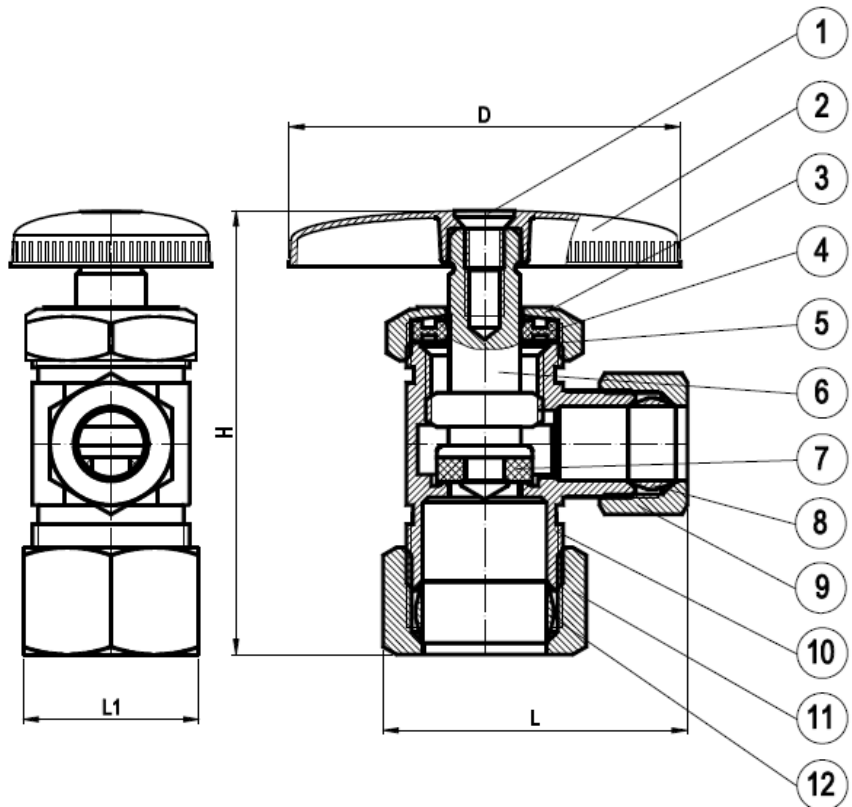

MATCO
NORCA

29-1019CPVCLF Supply Valve

Specification Sheet

FEATURES & BENEFITS

- Chrome Plated Lead Free
- NSF & UPC Approved
- 125 PSI
- Angle
- Temp. Rating: 32°F - 140°F
- 5/8" OD CPVC X 3/8" OD Compression




MATERIAL SPECIFICATIONS

No.	Part	Material
1	Bolt	JIS 3260 C2600W
2	Handle	Zinc Alloy Z30A
3	Bonnet	Brass B124 C37700
4	Packing	EPDM SN-719F
5	Washer	Stainless Steel 304
6	Stem	Brass C89550
7	Seat Packing	EPDM SN-719F
8	Sleeve	Brass C89550
9	Packing Nut	Brass B124 C37700
10	Body	Brass C89550
11	Packing	EPDM SN-719F
12	CPVC	Plastic POM-M90
13	Packing Nut	Brass B124 C37700

DIMENSIONS

H	L	L1	D
2.78	1.56	0.95	2.02

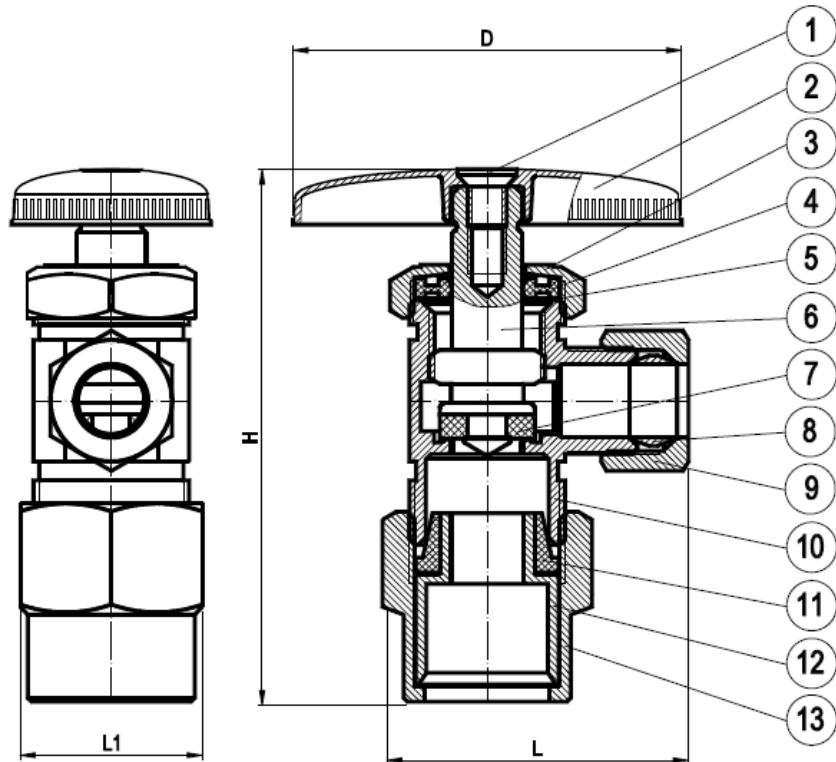

MATCO
NORCA