



BRONZE LOW PRESSURE GAS VALVES - PLUG STYLE

10686B SQUARE HEAD NON-TAMPERPROOF

Cast iron body, bronze plug manually operated 100 PSIG natural, manufactured, or propane gas valve for use in above ground gas piping systems in ambient temperatures between -20°F to 150°F. Iron body valves considered full port of flow.

- Inlet: FIP Thread
- Outlet: FIP Thread
- Sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2"




100 PSIG



~ DIMENSIONS ~					
SIZE	A	B	C	D	E
1/2	2.46	1.23	1.71	3.38	.58
3/4	2.81	1.41	1.75	3.50	.58
1	3.25	1.63	2.02	4.03	.69
1 1/4	3.75	1.88	2.07	4.52	.78
1 1/2	4.62	2.31	2.45	5.09	1.02
2	5.62	2.81	2.96	5.84	1.20
2 1/2	5.50	2.75	3.19	6.88	1.47
3	6.50	3.25	3.91	7.88	1.41

- Iron Body - Less Check
- Bronze Plug

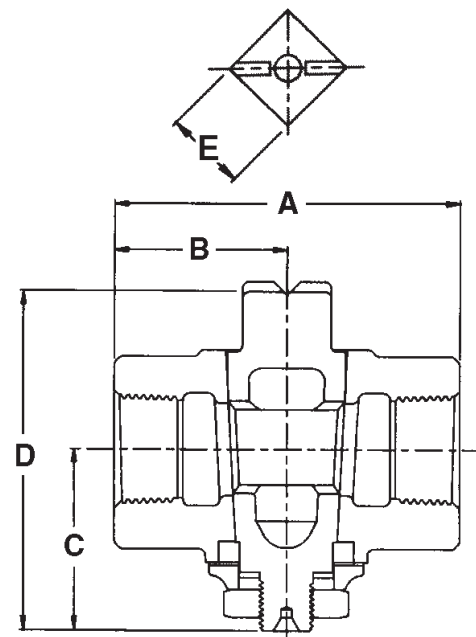

Manufactured to the guidelines set forth in ASME B16.33.

NOTE: All A.Y. McDonald plug style gas valves are factory set.
DO NOT TAMPER WITH BOTTOM NUT.

A.Y. McDONALD MFG. CO. • P.O. BOX 508 • DUBUQUE, IA 52004-0508
800-292-2737 • FAX 800-832-9296 • sales@aymcdonald.com • www.aymcdonald.com
(Gas Valves3 4/10)