MODEL 38300

HYDROSTATIC TEST PUMP




Global Leader in Waterworks Tools Since 1957

SAME POWERFUL PUMP, NEW LOWER PRICE

Compact, lightweight for portability, yet powerful and rugged for the professional



Certify Fire Sprinkler Lines, **Conduct Commercial Plumbing**, and perform **Industrial Testing** with ease. Our solution is designed to excel in these applications—compact, lightweight for effortless portability, yet robust and powerful for the demands of professionals like you. Equipped with a built-in adjustable pressure regulator, you have complete control at your fingertips, ensuring precise and accurate results every time.

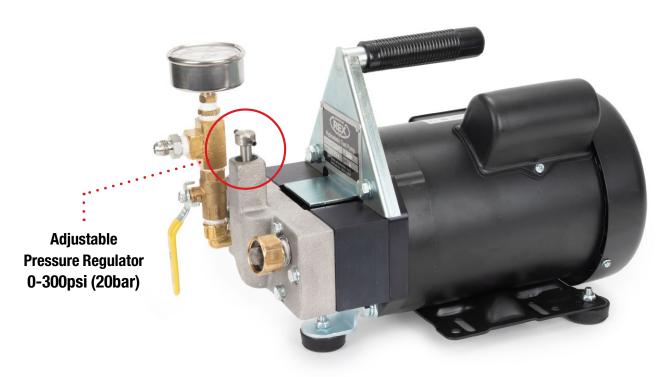

SPECIFICATIONS

Dimension 14" (356mm)L x 10" (254mm)W x 12" (305mm)H

Weight 45lbs/20kg

Pump Style Twin piston, positive displacement Capacity 4gpm/15lpm, @60hz; 3.4gpm/12lpm @50hz Pressure 0-300psi (20bar)

Motor 1/2hp 115/230V, 1725rpm @60hz, 1450rpm @50hz

Lubrication Chassis Grease

ControlAdjustable pressure relief valveGaugeGlycerin filled, 0-600psi (40bar)Inlet Connection3/4" Female garden hose

Outlet Connection 9/16-18 JICF Male

Discharge Hose 1/4" NPT Male x 10' (3m), 3000psi (207bar) **Hose Ends** 9/16-18 JICF Female swivel x 1/4" Male NPT

