


PRODUCT SPECIFICATIONS

Universal Vandal-Resistant 3000 Gal. Filtration Kit with Filter Status Monitor. Overall dimensions are 7-7/8" x 5-7/8" x 16-3/8". Made of Stainless Steel.

Special Features:	Vandal Resistant, Filtered, Visual Filter Monitor
Material:	Stainless Steel
Finish:	Stainless Steel (S)
Dimensions:	7-7/8" x 5-7/8" x 16-3/8"
Shipping Weight:	8 lbs.
Flow Rate:	1.5 GPM (5.6 L/m)
Capacity:	
Temperature:	40-100°F (4-38°C)
Initial Pressure Drop:	2-5 PSI (14-34 kPa)
Maximum Pressure:	105 PSI (724 kPa)
Minimum Pressure:	20 PSI (138 kPa)
Water Inlet:	3/8" (9.5mm) O.D. tube
Water Outlet:	1/4" (6.4mm) O.D. tube

Special Note: Includes WaterSentry Filter. Order 51300C as a replacement filter.

- Universal filtration kit works with Elkay® and non-Elkay units to turn any non-filtered bottle filling station into a filtered unit
- Versatile mounting options allow placement where needed near an accessible water line, with a 20-gauge vandal-resistant box for added filter protection
- Hinged vandal-resistant box for easy access to filter with battery-powered status monitor. Quick-disconnect, ¼ turn filter changes with built-in shut-off valve eliminating need to turn off water
- Includes WaterSentry® 51300C filter, mounting bracket, tubing, and filter connections. Box features conduit punchouts on the sides and bottom, an open back for through-wall plumbing, and filter status monitor for timely replacements
- Replace filter every 3,000 gallons or 1 year (sooner in high-traffic areas). 51300C filter is NSF 42 & 53 certified to reduce lead, Class 1 particulate, and chlorine taste & odor

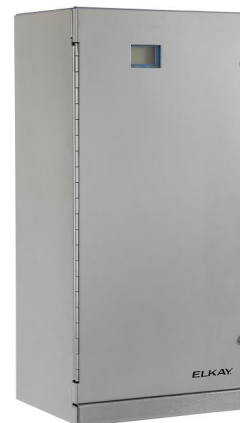

Included with Product: WaterSentry Filter, Filter Status Monitor, 20-Gauge stainless steel mounting box with 51300C

A Century of Tradition and Quality.


For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.

Product Compliance: NSF 61 (Q≤1)
NSF 372 (lead free)
NSF 42
NSF 53
NSF 401



[Installation Instructions \(PDF\) - 2000001249](#)
[Warranty \(PDF\)](#)

PART: _____ QTY: _____
PROJECT: _____
CONTACT: _____
DATE: _____
NOTES: _____
APPROVAL: _____

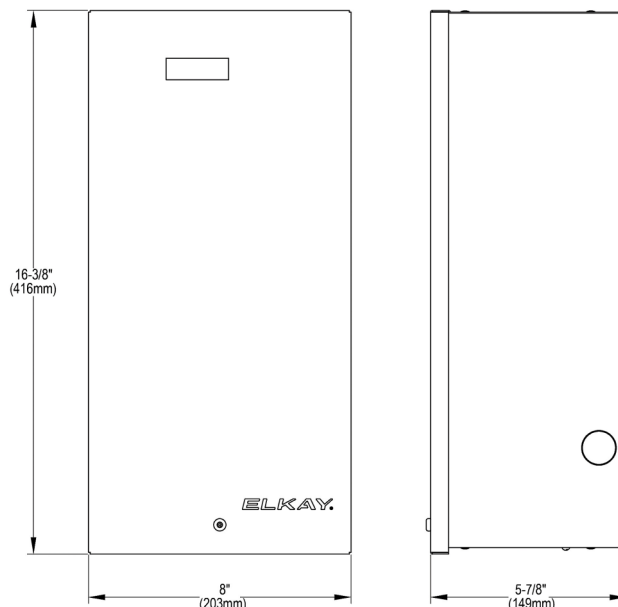

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.