


GATE 1174

BRONZE

200 lb. SWP-400 lb. WOG† • Heavy Duty Service
Solid Wedge Disc • Rising Stem • Stainless Seat • Gland Packed
Union Bonnet • Threaded Ends

Wear-resistant stainless seat rings are securely expanded into the body to assure trouble-free service. Normal seating wear is restricted to the bronze wedge and can be easily replaced.

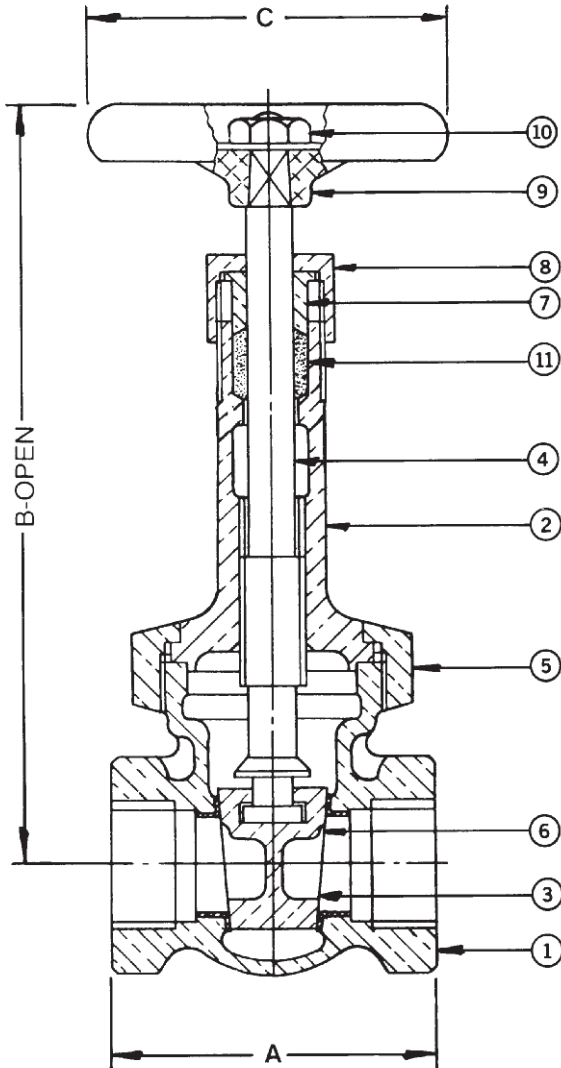

SPECIFICATIONS

1174 Conforms to: MSS SP-80, Type 2,
Class 200, Threaded Ends.

MATERIAL LIST

NO.	PART	MATERIAL	SPECIFICATION
1	Body	Bronze	ASTM B 61
2	Bonnet	Bronze	ASTM B 61
3	Wedge Disc	Bronze	ASTM B 61
4	Stem	Bronze	ASTM B 61
5	Union Bonnet Nut	Bronze	ASTM B 61
6	Seat Ring	St. Steel	ASTM A 240 TY304
7	Gland	Brass	ASTM B 124 C37700
8	Packing Nut	Brass	ASTM B 124 C37700
9	Handwheel	Mall. Iron	Commercial
10	Handwheel Nut	Brass	Commercial
11	Packing	Graphite	Commercial
12	Identification Plate	Aluminum	Commercial

DIMENSIONS - INCHES / MILLIMETERS

UNITS	SIZE	A	B	C	C _v
Inches	1/4	1.81	5.13	2.25	5.6
mm	6.4	46.1	130.2	57.2	
Inches	3/8	1.88	5.13	2.25	10.7
mm	9.5	47.6	130.2	57.2	
Inches	1/2	2.25	5.50	2.50	17.6
mm	12.7	57.2	139.7	63.5	
Inches	3/4	2.50	6.25	2.75	32.0
mm	19.1	63.5	158.8	69.9	
Inches	1	2.88	7.19	2.75	54.0
mm	25.4	73.0	182.6	69.9	
Inches	1 1/4	3.25	8.56	3.25	97.0
mm	31.8	82.6	217.5	82.6	
Inches	1 1/2	3.50	9.63	3.75	135.0
mm	38.1	88.9	244.5	95.3	
Inches	2	3.75	11.75	4.25	230.0
mm	50.8	95.3	298.5	108.0	
Inches	2 1/2	4.63	14.50	4.75	337.0
mm	63.5	117.5	368.3	120.7	
Inches	3	5.00	16.75	5.50	536.0
mm	76.2	127.0	425.5	139.7	

† Non-Shock

Rev. 5

INNOVATION IN EVERY VALVE



MILWAUKEE VALVE

www.milwaukeevalve.com

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the Installation, Operation and Maintenance Manual (IOM) see the engineering section on our website. For the most current information access www.milwaukeevalve.com