PROSELECT®

CTS MIP Pack Compression Coupling


Product Specifications


Product Features

- For CTS tubing
- MIP Pack Compression Coupling
- Sizes 3/4" – 2"
- Lead-free cast bronze
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Manufactured in compliance with ANSI/AWWA C800
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Temperature rating 100°F
- Pressure rating 150 psi
- Insert stiffeners required on all flexible plastic connections
- Imported

Material Specifications

No.	Parts	Materials	Qty.	Water Contact
1	Bolt	Stainless Steel 304	1	N
2	Packing Nut	Cast Bronze C83600	1	N
3	Washer	Nylon	1	N
4	Packing	Rubber (NBR) SN-719F	1	Y
5	Nipple	Cast Bronze C87850	1	Y
6	Thread Protector	Plastic	1	N

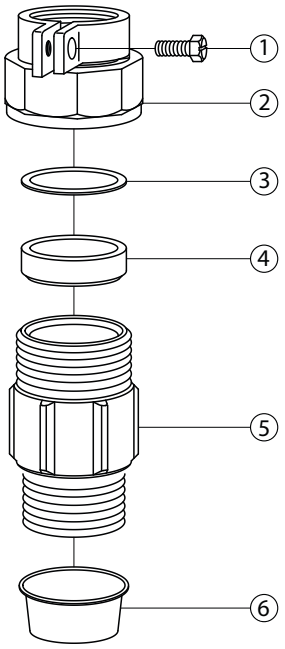

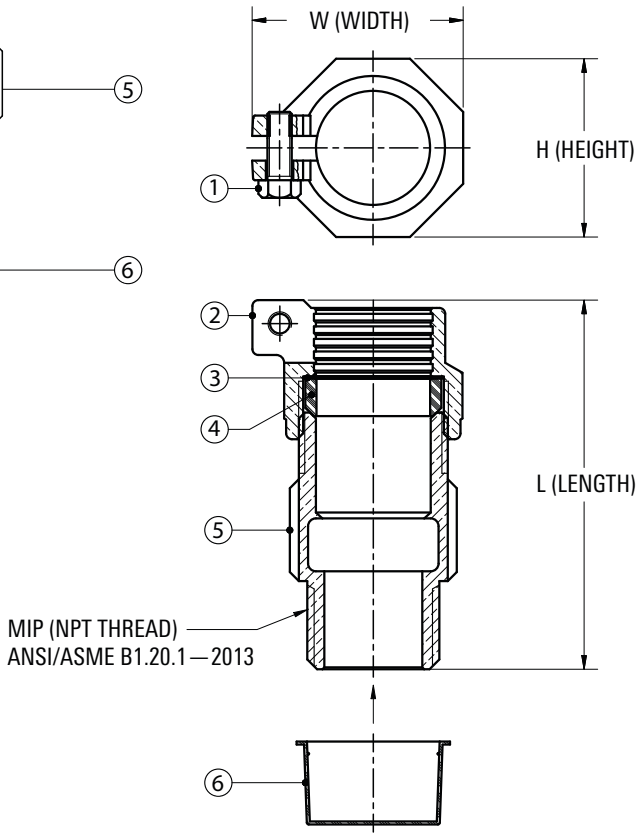

Model Numbers	Description	NOMINAL SIZE		DIMENSION			
		MIP	PJ. CTS	L	W	H	MIP
PSXCTSPMF	LF 3/4" CTS COMP X MIP COUP-PACK	3/4"	3/4"	3.402"	1.748"	1.535"	3/4" – 14NPT
PSXCTSPMG	LF 1" CTS COMP X MIP COUP-PACK	1"	1"	3.716"	2.110"	1.791"	1" – 11.5NPT
PSXCTSPMJ	LF 1-1/2" CTS COMP X MIP COUP-PACK	1-1/2"	1-1/2"	4.886"	2.933"	2.520"	1-1/2" – 11.5NPT
PSXCTSPMK	LF 2" CTS COMP X MIP COUP	2"	2"	5.216"	3.213"	2.972"	2" – 11.5NPT

©2025 Ferguson Enterprises, LLC 0925 8404808