
Z158

10 [254] SQUARE TOP PROM-DECK DRAIN W/ HEEL-PROOF GRATE & ROTATABLE FRAME

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

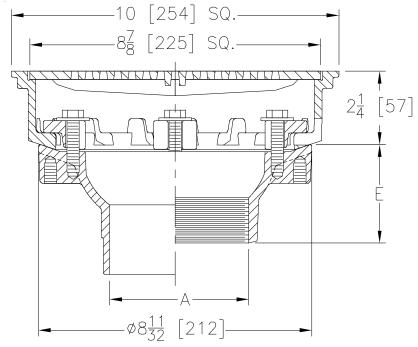

A Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm²]
2, 3, 4 [51, 76, 102]	20 [9]	21 [136]

ENGINEERING SPECIFICATION: ZURN Z158

10" [254mm] Square Top Prom-Deck drain, Dura-Coated cast iron body with rotatable square promenade frame with seepage openings, frame clamps and light duty heel-proof grate.

OPTIONS (Check/specify appropriate options)

	PIPE SIZE	(Specify size/type		e/type) OUTLET	'E' BODY HT. DIM.
	3, 4 [76, 102]		IC	Inside Caulk	3-7/8 [98]
	4 [102]		IΡ	Threaded	3 [76]
	3 [76]		ΙP	Threaded	2-3/4 [70]
	2 [51]		ΙP	Threaded	2-7/16 [62]
	2, 3, 4 [51, 76, 102]		NH	No-Hub	4 [102]
	2, 3, 4 [51, 76, 102]		NL	Neo-Loc	3-13/16 [97]
PREFIXES Z D.C.C.I. Body with Top* ZB D.C.C.I. Body with Polished Bronze Top (Add 3/16 [5] to 2-1/4 [57] Dim & 5/8 [16] to 10 [254] Dim.) ZN D.C.C.I. Body with Polished Nickel Bronze Top (Add 3/16 [5] to 2-1/4 [57] Dim & 5/8 [16] to 10 [254] Dim.)					
	SUFFIXES -AR Acid Resistant Epoxy Coated -C Underdeck Clamp -DG Duresist Grate -DP Top-Set® Roof Deck Plate -E 2 [51] High Static Extension -EB Top-Set® Adjustable Extensior -G Galvanized Cast Iron -SC Secondary Clamp Collar		bly	TC TS VP Y 85 90	Vandal-Proof Secured Top Sediment Bucket Stainless Steel Perforated Extension
	* Regularly furnished unless otherwise specified			Note: DP	and -90 ontion can not be specified together

* Regularly furnished unless otherwise specified.

www.zurn.com

Note: -DP and -90 option can not be specified together.

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

Rev.

Date: 09/25/2017 C.N. No. 137806 Prod. | Dwg. No. Z15