

F1807 Copper PEX Female Sweat Adapter

Specifications

- Can be used with copper PEX crimp rings or stainless steel PEX clamps
- Pressure and Temperature ratings:
 - 160 PSI at 73°F
 - 100 PSI at 180°F

Applications

- Residential potable water

Materials


- Lead-free C12200 copper

Dimensions and Product Offering

Part Code	Description	A	B - in (mm)	C - in (mm)	D - in (mm)	E - in (mm)
C76024	1/2" Female Sweat x 1/2" Barb	1/2" Barb	1.36 (34.50)	Ø 0.63 (16.00)	0.03 (0.76)	0.50 min (12.70)
C76025	3/4" Female Sweat x 3/4" Barb	3/4" Barb	1.67 (42.50)	Ø 0.88 (22.28)	0.03 (0.76)	0.75 min (19.05)
C76026	1" Female Sweat x 1" Barb	1" Barb	2.24 (57.00)	Ø 1.13 (28.65)	0.04 (1.02)	0.91 min (23.11)

Certifications/Listings/Approvals

- ASTM F1807
- NSF/ANSI/ CAN 372 and 61
- NSF/ANSI 14
- CSA B137.5
- ASME B16.22
- Lead Law Compliant

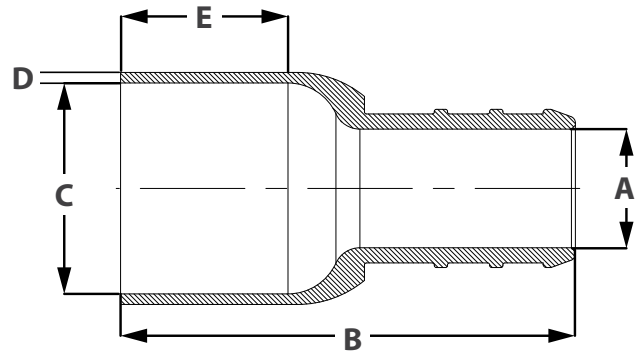

F1807 Specified Dimensions	ID -in. (mm)	OD -in. (mm)
1/2" End Connection	.37 (9.30)	.47 (11.98)
3/4" End Connection	.55 (13.85)	.67 (16.96)
1" End Connection	.72 (18.22)	.86 (21.74)