





NT SO Series



### T Style Sand Separator Filter Features:

- 180° in-line "T" style.
- 1-100 GPM models
- "Spin-out" action separates heavier than water particles away from screen into the collection chamber.
- Screen portion of element removes lighter than water particles.
- Extended sump provides greater collection area for sediment.
- Supplied with a 1/2" cleanout with purge valve.
- Supplied with polyester filter screens.

- **WATER USE ONLY**

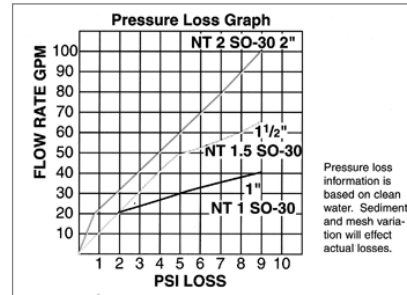

Part Number	Inlet/Outlet "P"	Mesh # Size	Mesh Opening	Min*/Max Flow GPM	"L"	"W"
<b>IPS x IPS (Female Thread 3/4" only)</b>						
NT75SO-60P	3/4" x 3/4"	60 (254 mic)	0.01	1-25	14 3/8"	5
NT75SO-100P	3/4" x 3/4"	100 (152 mic)	0.006	1-25	14 3/8"	5
NT75SO-140P	3/4" x 3/4"	140 (104 mic)	0.004	1-25	14 3/8"	5
NT75SO-250P	3/4" x 3/4"	250 (61 mic)	0.0024	1-25	14 3/8"	5
<b>Slip x Slip</b>						
NT1SO-60P	1" x 1"	60 (254 mic)	0.01	1-25	14 3/8"	5
NT1SO-100P	1" x 1"	100 (254 mic)	0.006	1-25	14 3/8"	5
NT1SO-140P	1" x 1"	140 (104 mic)	0.004	1-25	14 3/8"	5
NT1SO-250P	1" x 1"	250 (61 mic)	0.0024	1-25	14 3/8"	5
<b>Slip x Slip</b>						
NT1.5SO-24P	1-1/2" x 1-1/2"	24 (711 mic)	0.028	10-50	15 3/8"	5 1/4"
NT1.5SO-30P	1-1/2" x 1-1/2"	30 (533 mic)	0.021	10-50	15 3/8"	5 1/4"
NT1.5SO-40P	1-1/2" x 1-1/2"	40 (384 mic)	0.015	10-50	15 3/8"	5 1/4"
NT1.5SO-60P	1-1/2" x 1-1/2"	60 (254 mic)	0.010	10-50	15 3/8"	5 1/4"
NT1.5SO-100P	1-1/2" x 1-1/2"	100 (152 mic)	0.006	10-50	15 3/8"	5 1/4"
NT1.5SO-140P	1-1/2" x 1-1/2"	140 (104 mic)	0.004	10-50	15 3/8"	5 1/4"
NT1.5SO-250P	1-1/2" x 1-1/2"	250 (61 mic)	0.0024	10-50	15 3/8"	5 1/4"
NT1.5SO-500P	1-1/2" x 1-1/2"	500 (30 mic)	0.0012	10-50	15 3/8"	5 1/4"
<b>Slip x Slip</b>						
NT2SO-24P	2" x 2"	24 (711 mic)	0.028	18-100	17 7/8"	5 1/2"
NT2SO-30P	2" x 2"	30 (533 mic)	0.021	18-100	17 7/8"	5 1/2"
NT2SO-40P	2" x 2"	40 (384 mic)	0.015	18-100	17 7/8"	5 1/2"
NT2SO-60P	2" x 2"	60 (254 mic)	0.010	18-100	17 7/8"	5 1/2"
NT2SO-100P	2" x 2"	100 (152 mic)	0.006	18-100	17 7/8"	5 1/2"
NT2SO-140P	2" x 2"	140 (104 mic)	0.004	18-100	17 7/8"	5 1/2"
NT2SO-250P	2" x 2"	250 (61 mic)	0.0024	18-100	17 7/8"	5 1/2"
NT2SO-500P	2" x 2"	500 (30 mic)	0.0012	18-100	17 7/8"	5 1/2"

\*Do not use metal valve or fitting on 1/2" drain connections

• Do not install filters with purge valves on the suction side of pump

\* Minimum flow needed for "spin-out" action.

Carton Quantity of 10 for all products