



FLAT AND FENDER WASHERS

Product Features

- Zinc plated to resist corrosion
- Low carbon steel

Model Numbers

Flat Washers

PSGFSWB - 1/4"
PSGFSW516 - 5/16"
PSGFSWC - 3/8"
PSGFSWD - 1/2"
PSGFSWE - 5/8"
PSGFSWF - 3/4"
PSGFSW78 - 7/8"
PSGFSWG - 1"

Fender Washers

PSSFWBG - 1/4" X 1"
PSSFWBH - 1/4" X 1-1/4"
PSSFWCH - 3/8" X 1-1/4"
PSSFWCJ - 3/8" X 1-1/2"
PSSFWCK - 3/8" X 2"
PSSFWDJ - 1/2" X 1-1/2"
PSSFWDK - 1/2" X 2"




FLAT WASHERS

PART#	For Use With BOLT SIZE		A (I.D.)		B (O.D.)		C (THICKNESS) Range	
PSGFSWB	1/4"	(6.3mm)	5/16"	(7.9mm)	3/4"	(19mm)	0.051 - 0.08"	(1.2 - 2mm)
PSGFSW516	5/16"	(7.9mm)	3/8"	(9.5mm)	7/8"	(22.2mm)	0.064 - 0.104"	(1.6 - 2.6mm)
PSGFSWC	3/8"	(9.5mm)	7/16"	(11.1mm)	1"	(25.4mm)	0.064 - 0.104"	(1.6 - 2.6mm)
PSGFSWD	1/2"	(12.7mm)	9/16"	(14.2mm)	1-3/8"	(34.9mm)	0.086 - 0.132"	(2.1 - 3.3mm)
PSGFSWE	5/8"	(15.8mm)	21/32"	(16.6mm)	1-3/4"	(44.5mm)	0.108 - 0.160"	(2.7 - 4.0mm)
PSGFSWF	3/4"	(19mm)	13/16"	(20.6mm)	2"	(50.8mm)	0.122 - 0.177"	(3.0 - 4.4mm)
PSGFSW78	7/8"	(22.2mm)	15/16"	(23.8mm)	2-1/4"	(57.1mm)	0.136 - 0.192"	(3.4 - 4.8mm)
PSGFSWG	1"	(25.4mm)	1-1/16"	(26.9mm)	2-1/2"	(63.5mm)	0.136 - 0.192"	(3.4 - 4.8mm)

FENDER WASHERS

PART#	For Use With BOLT SIZE		A (I.D.)		B (O.D.)		C (THICKNESS) Range	
PSSFWBG	1/4"	(6.3mm)	9/32"	(7.1mm)	1"	(25.4mm)	0.051 - 0.08"	(1.2 - 2mm)
PSSFWBH	1/4"	(6.3mm)	9/32"	(7.1mm)	1-1/4"	(31.7mm)	0.051 - 0.08"	(1.2 - 2mm)
PSSFWCH	3/8"	(9.5mm)	13/32"	(10.3mm)	1-1/4"	(31.7mm)	0.051 - 0.08"	(1.2 - 2mm)
PSSFWCJ	3/8"	(9.5mm)	13/32"	(10.3mm)	1-1/2"	(38.1mm)	0.051 - 0.08"	(1.2 - 2mm)
PSSFWCK	3/8"	(9.5mm)	13/32"	(10.3mm)	2"	(50.8mm)	0.051 - 0.08"	(1.2 - 2mm)
PSSFWDJ	1/2"	(12.7mm)	17/32"	(13.4mm)	1-1/2"	(38.1mm)	0.051 - 0.08"	(1.2 - 2mm)
PSSFWDK	1/2"	(12.7mm)	17/32"	(13.4mm)	2"	(50.8mm)	0.051 - 0.08"	(1.2 - 2mm)

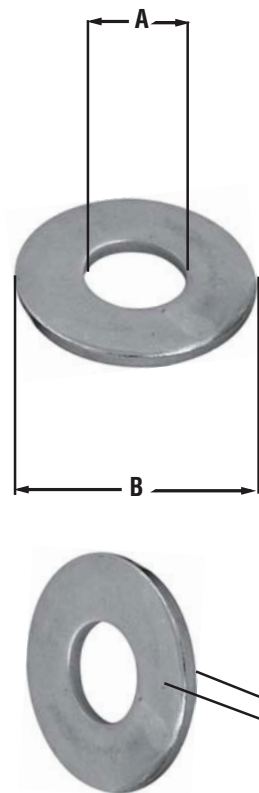

Warranty and Codes

This PROSELECT product is ASME Standard B18.22.1 1965 (R1998) compliant. Complies with USS sizing standards. Heavy pattern