
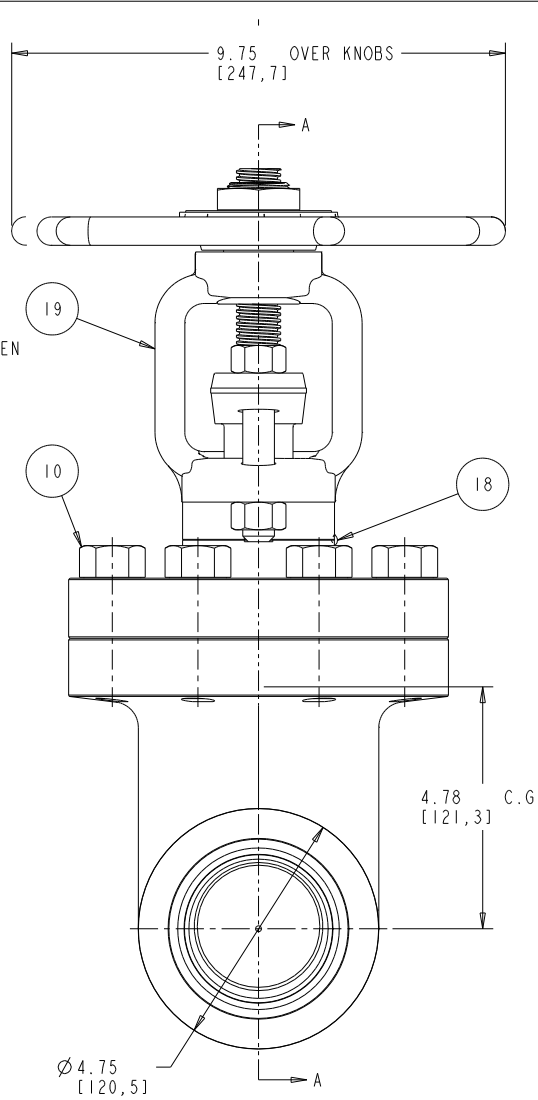


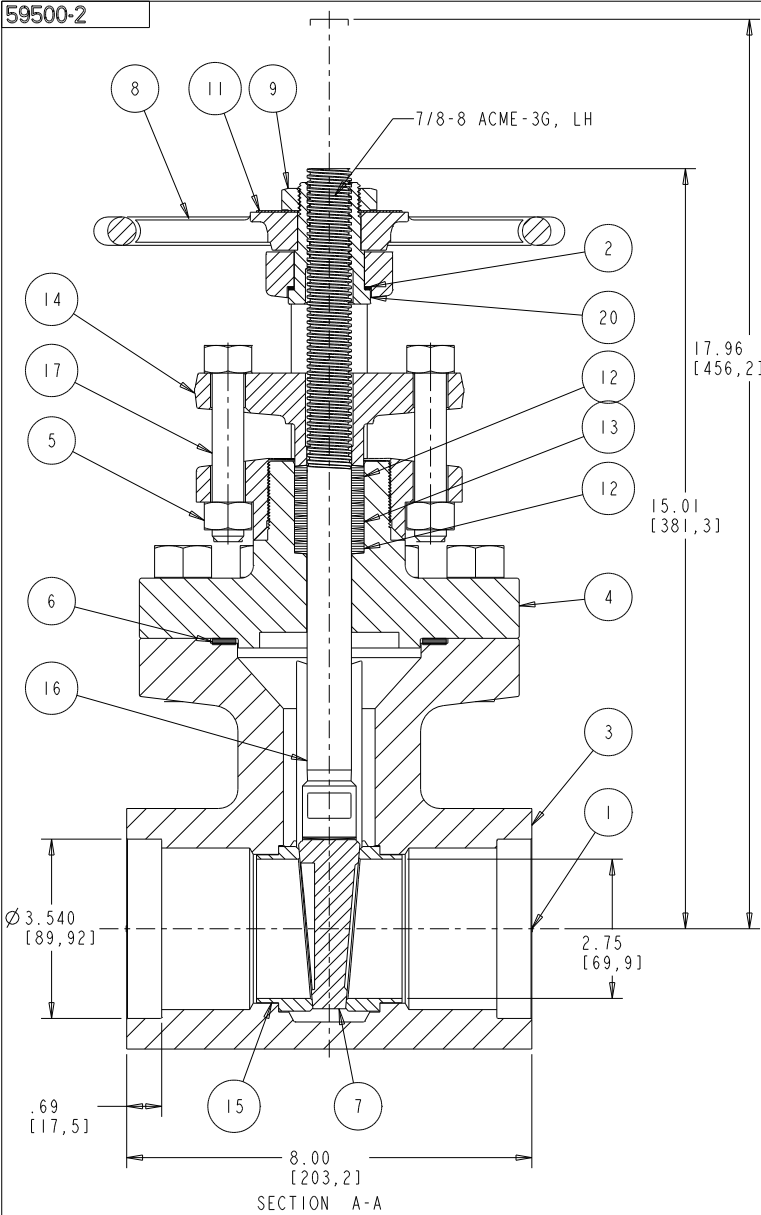

ITEM	QTY	ITEM NO	DRAWING	PART NAME	MATERIAL
1	2	58782		3 SW PROTECTOR	POLYETHYLENE
2	1	58135	9205	BEARING RING	AMPCO ALUM BRONZE
3	1	20610	59502	BODY	A105
4	1	30303	48772	BONNET	A105
5	4	50236	60684E	FINISHED HEX NUT	F594 304SS
6	1	55042	45706N	GASKET	304/GRAFOIL
7	1	32670	48769	GATE	A479 TYPE 410
8	1	35049	43460	HANDWHEEL	MALLEABLE IRON
9	1	50001	5350	HANDWHEEL NUT	A105
10	8	50081	45417J	HEX HD BOLT	A193 GR B7
11	1	40008	38235	NAME PLATE	ALUMINUM
12	2	55192		PACKING	BRAIDED GRAPHITE
13	5	55143		PACKING	FLEXIBLE GRAPHITE
14	1	34053	28229	PACKING GLAND	A105
15	2	32167	48767	SEAT RING	A479 T410 HF
16	1	32876	48768	STEM	A479 TYPE 410
17	2	50176	21912	STUD BOLT	F593 304SS
18	1	58452		TACK WELD	(RMPWPS555)
19	1	34001	28227	YOKE	A105
20	1	58102	18314	YOKE NUT	A582 TYPE 416

NOTE:
PRESS SEATS PER RMPVFSP024
GATE VALVE TO BE TESTED PER API-598 PER RMPVFLT004

	X.XX	Inches
	[XX,X]	MM
WEIGHT	75.0 LBS	34.03 Kg
Cv FACTOR		203.9

CNS	57344
REV	02
BY	R.Jackson
DATE	9-22-2003
DWN BY	THURMAN
CHK BY	S.B.R.
RVD BY	
DATE	11-06-95
SCALE	0.600

SERIES No: **SW12111-11**

ITEM No: **200673**

RATING: 1975 PSI • 100 F SPECS: API 602/ASME B16.34

BODY A105 | SEAT HF | DISC 13CR | STEM 13CR

FLOWERVE Vogt Valves

SULPHUR SPRINGS, TEXAS, USA

3" GATE VALVE - SOCKET WELD ENDS
FORGED STEEL - OS&Y - BOLTED BONNET
5° RENEWABLE SEATS - BOLTED GLAND
LOOSE SLOTTED GATE - CLASS 800

59500-2