

# Shower Rods Technical Specification


## Shower Rod Sets – Concealed Screw

61

### Stock Numbers:

- q **61-5SS – 5' Stainless Steel Shower Rod Set**  
Polished Chrome Finish  
1" Diameter Rod  
Concealed Screw Mounting  
Flanges (61-F)

### Dimensions:

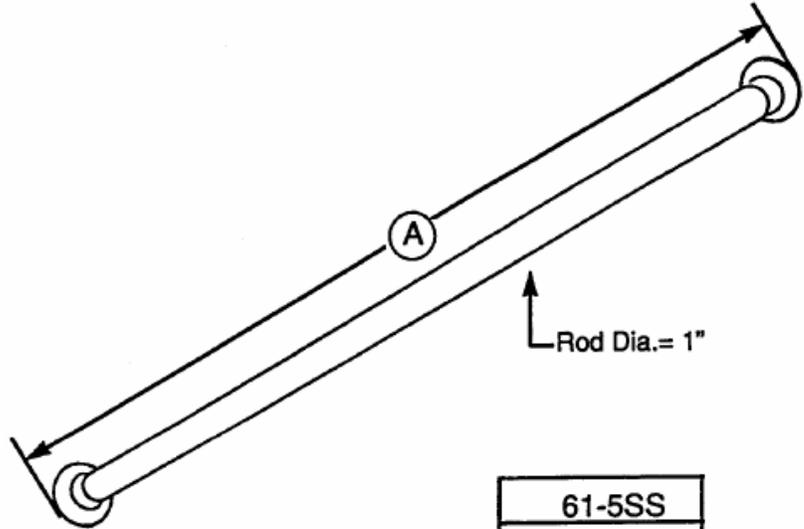

(For flange dimensions, see 61-F Technical Specification)

### Materials:

**Shower Rods** are aluminum with triple plated polished chrome finish.

**“SS” Shower Rods** are 28-gauge stainless steel with a triple plated polished chrome finish.

See Technical Specification for 61-F for information on the adjustable flanges.

### Installation Instructions:

1. Position rod in shower opening in desired location.
  2. Mark rod ends on walls.
  3. Position brackets so that they are centered over rod outlines and mark mounting holes.
  4. Drill starter holes.
  5. Attach left bracket to wall using 2" screws (provided).
  6. Slide left cover on left end of rod and mount on installed bracket.
  7. Place right cover on right end of rod.
  8. Insert right bracket into right end of rod.
  9. Place end of rod in position and attach bracket to wall with 2" screws (provided).
  10. Snap covers into place over brackets.
- Note: Wood blocking is preferable behind all wall surfaces.  
If wood blocking is not available, the following optional fasteners are suggested: Tile/Masonry – Plastic or Lead Anchors; Plaster/Drywall – Toggle Bolts

**Stock Number:** \_\_\_\_\_ **Shower Rod**  
By Creative Specialties



25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070  
CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636  
INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726  
CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720  
WWW.CSI.MOEN.COM

©Copyright Creative Specialties International 2006