



BOLT INSULATORS

Features

- Sold Individually
- Manufactured in Nylon Material
- White in Color
- For Electrical Isolation Between Flanges and Flange Bolts
- Sizes 1/2", 5/8" and 3/4"

Specifications

- Material: Mineral Reinforced Nylon 66 Resin, Minlon® 10B40 NC010
- Tensile: 13,053 PSI (ASTM D638)
- Elongation: 2.5% (ASTM D638)
- Heat Deflection Temperature:
 - 66 PSI - 482°F (ASTM D648)
 - 264 PSI - 428°F (ASTM D648)
- Melting Point: 504°F (ASTM D3418)
- Specific Gravity: 1.51 (ASTM D792)

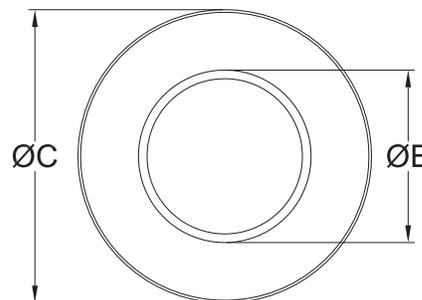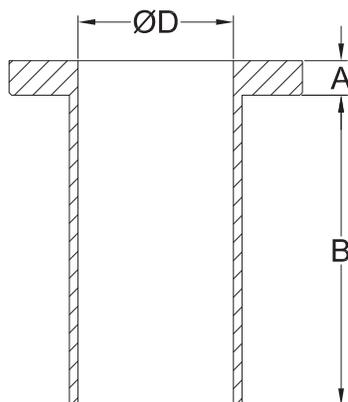

Dimensions (inches)

Size	A	B	ØC	ØD	ØE
1/2	0.16	1.03	1.14	0.53	0.59
5/8	0.17	1.13	1.32	0.66	0.72
3/4	0.16	1.59	1.57	0.78	0.84

Figure Number Matrix

FNW CBI Size
SIZE CODE
1/2 = D
5/8 = E
3/4 = F

DOC: FNWCBI08 Ver. 4/2014

© 2014 - FNW. All rights reserved.

The FNW logo is a trademark of Ferguson Enterprises, Inc., PL Sourcing, PO Box 2778, Newport News, VA 23609

www.fnw.com

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice. Always verify that you have the most recent product specifications or other documentation prior to the installation of these products.