

DESCRIPTION

- Metal construction with chrome plated, chrome w/Lifeshine® polished brass, wrought iron, antique nickel, Lifeshine® brushed nickel, or oil rubbed bronze finishes
- For installations from 8" (203mm) to 10" (254mm) centers
- Designed to be installed on decks up to 2-1/8" (54mm)
- The tub fill spout is a slip fit design and the supplies are 1/2" type K, copper tubing
- Includes hot and cold temperature indicators

OPERATION

- Lever style handles
- Rotate hot side handle counterclockwise to open clockwise to close and the cold side handle clockwise to open and counterclockwise to close

FLOW

- Designed to deliver 18 gpm at 40 psi (68L/min)

CARTRIDGE


- 1248 cartridge design

STANDARDS

- Third party certified to meet CSA B-125, ASME A112.18.1M, ANSI A117.1 and all applicable requirements referenced therein

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

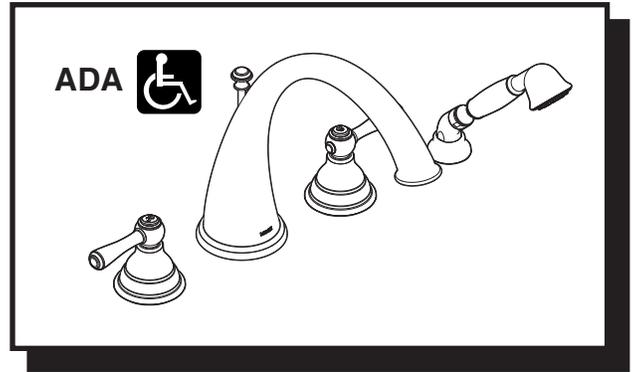

KINGSLEY™ DECK MOUNT Two-Handle Roman Tub Faucet w/Built In Diverter Valve

Models: T922, T922AN, T922BN, T922CP,
T922ORB, T922WR

Valve: 9997, 9999

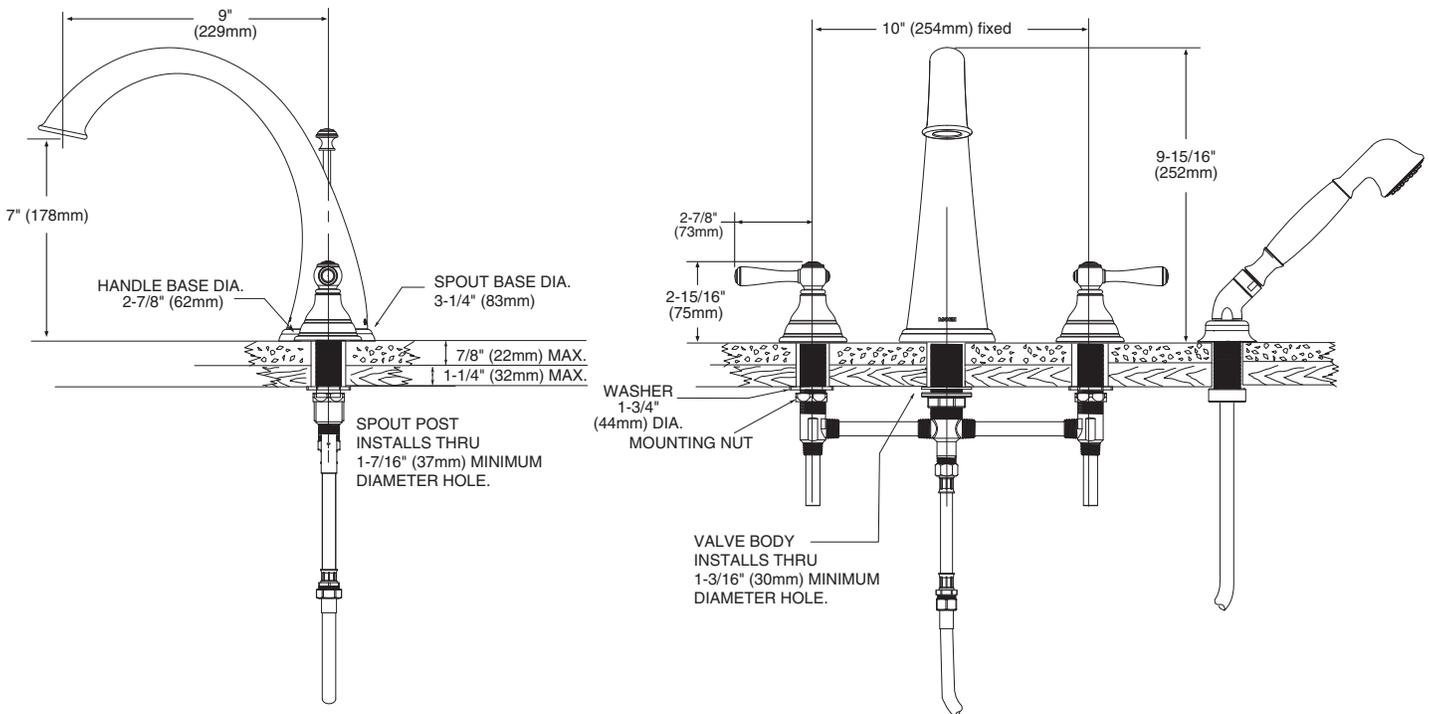

NOTE: THE INSTALLATION SHOWN IS FOR TILE DECKS, THIS VALVE WILL ALSO FIT STEEL, CAST IRON OR PLASTIC DECKS

CRITICAL DIMENSIONS

(DO NOT SCALE)