


SUBMITTAL INFORMATION

Stainless Steel Saddle- (FRS202-xxx-xxx style)





STAINLESS STEEL DOUBLE BAND REPAIR SADDLES

Body - 7-1/2" wide
ASTM A240 Type 304
stainless steel for total
corrosion control. All
welds are fully passivated
to restore stainless steel
characteristics.

Lifter Bar - ASTM A240
Type 304 stainless steel
provides a heavy surface
for nuts

Gasket - Buna-N ASTM D2000
rubber with circular grid.

Nylatron GS* is a
registered trademark
of the Polymer
Corporation.

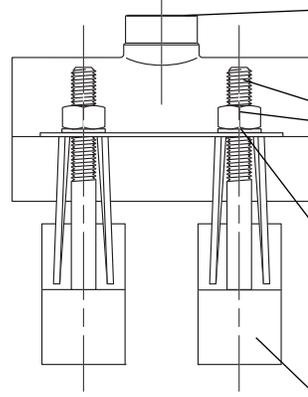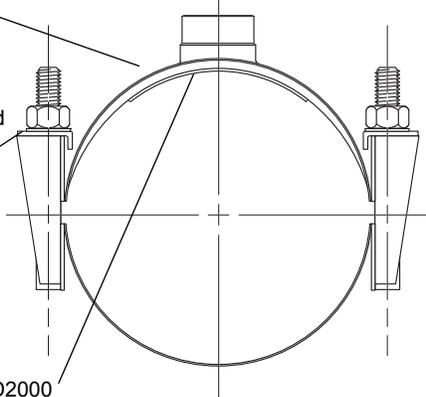

Taps - ASTM A240
Type 304 stainless steel
available in 3/4" through 2"
FIP, AWWA or BSP threads.

Studs and Nuts -
ASTM A240 Type 304
stainless steel 5/8"
UNC threads Heavy
Hex Nuts are coated to
prevent galling.

Washers - Special
Nylatron GS* washers
are also provided for
added lubrication.

Bands - Heavy gage
ASTM A240 Type 304
stainless steel.

NOM. PIPE SIZE	O.D. RANGE	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
4"	4.75 - 5.35	7.4	FRS202-535-Tap	
6"	6.85 - 7.60	7.8	FRS202-760-Tap	
8"	9.00 - 9.79	8.3	FRS202-979-Tap	
10"	11.00 - 11.80	8.8	FRS202-1180-Tap	
	11.50 - 12.25	8.9	FRS202-1225-Tap	
12"	13.10 - 13.90	9.2	FRS202-1390-Tap	
	13.60 - 14.40	9.3	FRS202-1440-Tap	
14"	15.20 - 16.00	9.4	FRS202-1600-Tap	
16"	17.20 - 18.00	10.0	FRS202-1800-Tap	
18"	19.20 - 20.00	12.5	FRS202-2000-Tap	
20"	21.40 - 22.20	13.1	FRS202-2220-Tap	
24"	23.20 - 24.00	13.6	FRS202-2400-Tap	
	25.60 - 26.40	15.7	FRS202-2640-Tap	
30"	31.30 - 32.00	16.2	FRS202-3200-Tap	
	32.00 - 32.80	17.4	FRS202-3280-Tap	
36"	35.40 - 36.20	18.8	FRS202-3520-Tap	
	37.50 - 38.30	19.7	FRS202-3830-Tap	

OUTLET TAP CODE

CC (AWWA) THREAD		
THREAD	CODE NUMBER	✓SUBMITTED ITEM(S)
3/4" CC	CC3	
1" CC	CC4	
1-1/4" CC	CC5	
1-1/2" CC	CC6	
2" CC	CC7	

IP THREAD		
THREAD	CODE NUMBER	✓SUBMITTED ITEM(S)
3/4" IP	IP3	
1" IP	IP4	
1-1/4" IP	IP5	
1-1/2" IP	IP6	
2" IP	IP7	

BSP THREAD		
THREAD	CODE NUMBER	✓SUBMITTED ITEM(S)
3/4" IP	BSP3	
1" IP	BSP4	
1-1/4" IP	BSP5	
1-1/2" IP	BSP6	
2" IP	BSP7	

To Order: Select the catalog number for the desired pipe range and complete the catalog number by adding the outlet thread tap code. Example: A double band repair saddle for 9.79 O.D. pipe with a 3/4" CC thread would be FRS202-979-CC3.

FEATURES

- 7-1/2" Wide Body, Bands and 5/8" NC threaded studs are made of ASTM A240 Type 304 stainless steel. All welds are fully passivated for corrosion resistance
- Gasket is tapered Buna-N rubber (ASTM D2000) with circular grid

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
<http://www.fordmeterbox.com>

01/20/11

Submitted By: