

**10
YEAR
LIMITED
WARRANTY**

**NAT.
GAS
& LP**


GRAVITY CONVENTIONAL-VENT WALL FURNACE

Cozy Gravity Wall Furnaces mount on any inside or outside wall (single wall only), providing both circulated and radiant heat in an economical package. Available in single or dual wall models, each fits between any standard 16" center stud space.

Available in 25,000, 35,000 and 50,000 BTU's, Cozy Gravity Wall Furnaces provide ample heating for new constructions, additions, and other hard to heat areas. With self-energizing controls for use during power outages, heavy gauge steel grill to eliminate heat warp, and an optional fan accessory kit, Cozy Gravity Wall Furnaces are a top choice of contractors everywhere.

COZY VALUE FEATURES:

- Neutral Bone Baked Enamel Finish
- Resetttable Blocked Flue Safety Device
- "Unibody" Grill Construction
- Self Energizing Controls
- 430 Stainless Steel, Ported Burner
- Low BTU Pilot
- Continuous Seam Welded Combustion Chamber
- Optional Thermostatically Controlled Fan
- Wall Thermostat Standard

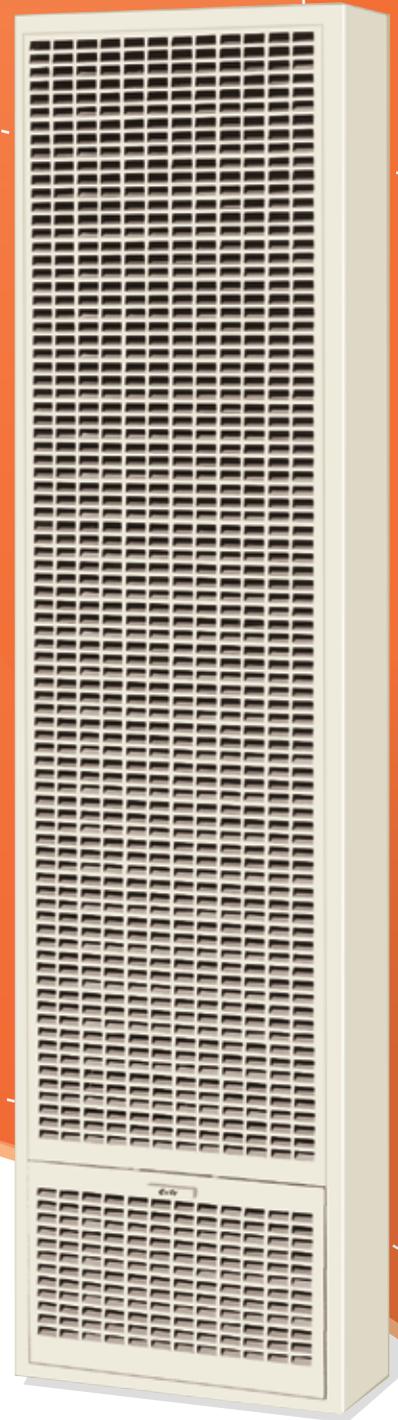

COZY



Cozy Heating Systems LLC
phone - 502.589.5380
toll free - 855.589.5380
www.cozyheaters.com

Made in the USA

GRAVITY CONVENTIONAL-VENT WALL FURNACE

COZY




	Single Wall		Dual Wall
Nat. Gas Model # LP Gas Model #	W255 W256	W355 W356	W505 W506
Type Control	M. Volt	M. Volt	M. Volt
BTU Input / Hr	25,000	35,000	50,000
Vent Size	4"	4"	4"
Gas Inlet	1/2"	1/2"	1/2"
Finished Grill Dimensions	16 1/2" W x 68 3/8" H x 6 1/2" D		
Shipping Weight	90 lbs	90 lbs	134 lbs
Rear Register Kit [Model Weight	40542 5 lbs	40542 5 lbs	N/A N/A
Fan Kit [Model Weight	WFF81 10 lbs	WFF81 10 lbs	WFF81* 10 lbs

Specify altitude if other than 2,000 ft elevation.
*Dual wall units will accept two fan kits.


Single Wall Furnace Models may be equipped with a Rear Register Kit (40542) allowing warm air to circulate into the adjoining room. Adjustable vent controls air flow.



Optional built-in bulb stat kit (BBSK).




Resettable Blocked Flue Safety Device automatically shuts unit off if flue is blocked or incorrect vent installation.

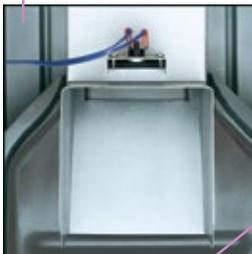


Continuous Seam - Welded Combustion Chamber maximizes heat transfer. Warranted for ten (10) years.

Free Standing Kit (FSK) allows single wall furnaces to be surface mounted. Eliminates cutting holes in wall - ideal for masonry wall installation. For use with ceilings up to 8'6" tall; adds 4-3/4" to unit depth (vent pipe not included). Weight 16 lbs.

Rough In - Easy installation method reduces installation time to minutes. Only one man needed. New positive fastening tabs hold grille in place. Makes installation a snap!

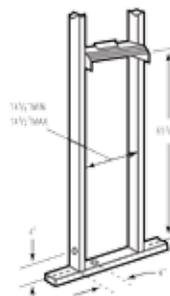

Rough-In Dimensions

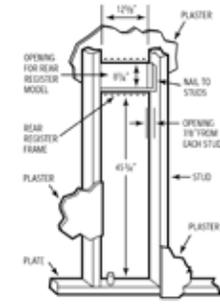

Rear Register Rough-In



3003P - Optional wireless remote thermostat.

Fan Accessory kit WFF81 available for installation on top of furnace to help circulate warm air. Adds only 10-1/2" to height of casing. Fits flush against wall - not recessed. Operates at 50 CFM on 115V.