




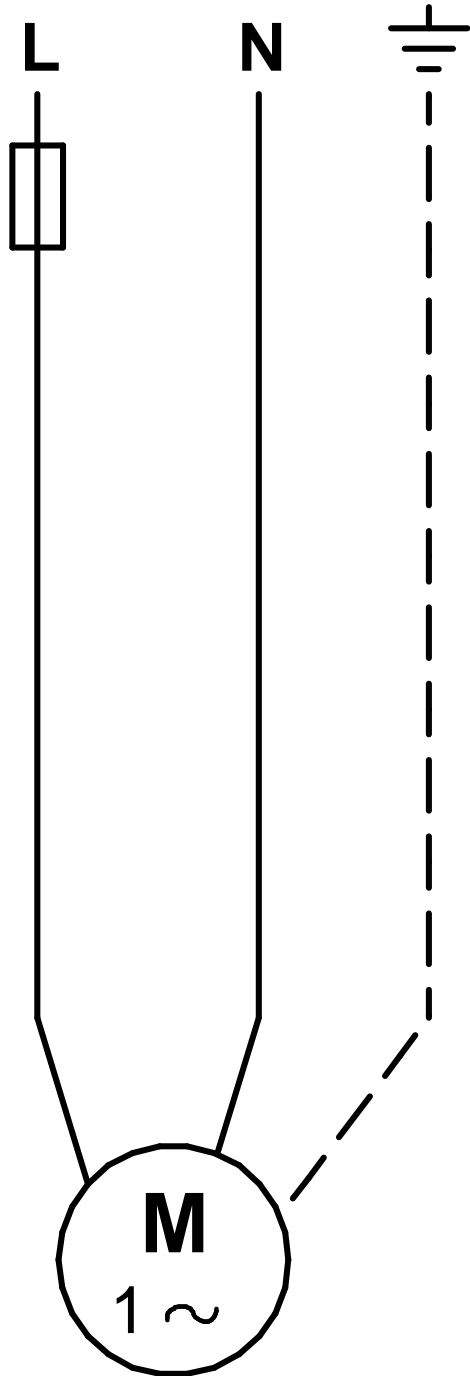
Position	Count	Description	Unit price
	-1	<p>5 SQ05-180</p>  <p>Product photo could vary from the actual product</p> <p>Product No.: 96160165 3" multi-stage, submersible pump designed for domestic water supply, liquid transfer in tanks, irrigation and environmental applications. The pump has "floating" impellers, each with its own tungsten carbide/ceramic bearing.</p> <p>The pump features soft starting and protection against dry-running, upthrust, overvoltage, undervoltage, overload and overtemperature.</p> <p>The motor is a one-phase motor of the permanent magnet rotor type ensuring optimum efficiency within a wide load range. The motor is fitted with a replaceable cable plug.</p> <p>Liquid: Maximum liquid temperature: 95 °F Max liquid temperature at 0.15 m/sec: 95 °F Density: 62.4 lb/ft³</p> <p>Technical: Speed for pump data: 10700 rpm Rated flow: 4.4 US gpm Rated head: 236 ft Approvals on nameplate: UL, cUL Approvals on motor nameplate: CE,UL,CUL</p> <p>Materials: Pump: Polyethylene / Stainless steel DIN W.-Nr. 1.4301 Motor: Stainless steel DIN W.-Nr. 1.4301 AISI 304</p> <p>Installation: Pump outlet: NPT 1 Minimum borehole diameter: 2.99 in</p>	On request



Company name: -
Created by: -
Phone: -
Fax: -
Date: -

Position	Count	Description	Unit price
		Electrical data: Motor type: MS3 Power input - P1: 1.09 kW Rated power - P2: 0.939 HP Main frequency: 60 Hz Rated voltage: 1 x 100-115 V Start. method: direct-on-line Service factor: 1,85 Rated current: 12 A Power factor: 1,00 Rated speed: 10700 rpm Enclosure class (IEC 34-5): 58 Insulation class (IEC 85): F Length of cable: 4.92 ft	

96160165 5 SQ05-180 60 Hz



All units are [mm] unless otherwise presented.