

## SPECIFICATIONS

### GENERAL

Sink bowl is seamlessly drawn of heavy gauge, nickel-bearing stainless steel.

### DESIGN FEATURES

Bowl Depth: 6-1/2".

Coved Corners: Interior vertical and horizontal corners are rounded to a minimum of 2-3/4" radii.

Faucet Deck: Raised.

Finish: Exposed surfaces are polished to a satin finish with highshine bowl radius.

Underside: Undercoated as described below.

Self-rimming: Sink shall be furnished with the appropriate number of clamps to provide a secure, watertight installation.

### OTHER

Drain Opening: 3-1/2".

Faucet Holes: 3 or 4 1-1/2" diameter faucet holes as indicated, 4" center to center.

Note: Unless otherwise specified, sink is furnished with 4 faucet holes as shown.

Recommended Minimum Cabinet Size: 30".

These sinks comply with ANSI Standard A112.19.3M.



These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code.

### SINK DIMENSIONS (INCHES)\*

Model Number	Overall		Inside Each Bowl		Cutout in Countertop (1 1/2" Radius Corners)	No. of 1 1/2" Dia. Faucet Holes	Ship. Wt. Lbs.		
	L	W	L	W					
	A	B	C	D					
D12521	25	21 1/4	21	15 3/4	6 1/2	24 3/8	20 5/8	3 or 4	9 3/4
D612521	25	21 1/4	21	15 3/4	6 1/2	24 3/8	20 5/8	3 or 4	51
D5012521	25	21 1/4	21	15 3/4	6 1/2	24 3/8	20 5/8	3 or 4	489
D12522	25	22	21	15 3/4	6 1/2	24 3/8	21 3/8	3 or 4	10
D612522	25	22	21	15 3/4	6 1/2	24 3/8	21 3/8	3 or 4	53
D5012522	25	22	21	15 3/4	6 1/2	24 3/8	21 3/8	3 or 4	489


\*Length is left to right. Width is front to back.

NOTE: Four faucet holes standard unless otherwise specified.

D-Prefix sinks are packed one per shipping carton. Sink bowl is fully undercoated.

D6-Prefix sinks are nested six per shipping carton. Sink bowls are sound deadened on bottom only.

D50-Prefix sinks are nested 50 per shipping carton. Sink bowls are sound deadened on bottom only.

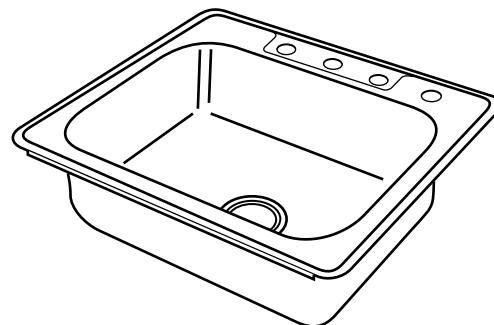

Model D125224

ALL DIMENSIONS IN INCHES, TO CONVERT TO MILLIMETERS MULTIPLY BY 25.4.

*In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.*

*This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.*