

FG-100A BATTERY BACK-UP SUMP PUMP

Protects Home

If AC-powered pump fails

Backs Up Residential Sump Pump

Automatically during power outage or pump failure
(primary pump and piping not included)

Reliable Operation

Self-Charging System

Continuous

Solid-State Controller

Monitors battery charge and pump operation

Audible Alarm

Sounds when standby pump activates

Controller

Includes connectors for pump, charger, float switch and battery*

Area Light

Illuminates dark, powerless work area

Works with Flooded and Sealed AGM

Deep Cycle Lead-Acid Battery

Can use two batteries for extended protection

Resettable Circuit Breaker

Eliminates the need for a fuse

2A 5-Stage Charger

Maintains 90% charge

* Deep cycle marine-type battery (Group 24) recommended –
not included with FG-100 system



Catalog Number	Volts	Hz	Cord Length	Aprox. Wt. Lbs.
FG-100A	12	60	8'	14.75

System includes: Pump, dual check valves, 1-1/4 x 1-1/2 inch adapter tee, battery box and control panel (battery not included).

FG-100A BATTERY BACK-UP SUMP PUMP

Features


The Hydromatic® FG-100A battery operated back-up sump pump is designed to back up primary residential sump pumps in case of pump or power failure. A must for those installations where an inoperative sump pump cannot be tolerated. Separate float switch and built-in alarm automatically start back-up system and activates warning buzzer to protect against high water damage and warn of primary pump failure.

Details


Specifications

- Housing – Thermoplastic
- Intermittent Liquid Temperature – Up to 77°F (25°C)
- Pump Down Range – Variable with float setting
- Pump Discharge – 1.25" NPT (31.75 mm)
- Motor – 12V, DC, 9A at 10 ft. (3M) lift
- Impeller – Thermoplastic
- Power Cord – 8 ft. SJT, 16/2 GA
- Capacities – Up to 30 GPM (114 LPM)
- Heads – To 16 ft. (4.88 m)
- Battery Charger – Input 120V, 60 Hz; Output 12V, 2A; Plug-in type wall-mounted transformer
- Check Valve – Dual check valves
- Battery Requirement* – 12V, deep cycle, marine type (Group 24), minimum 75–120 AH

Performance Data

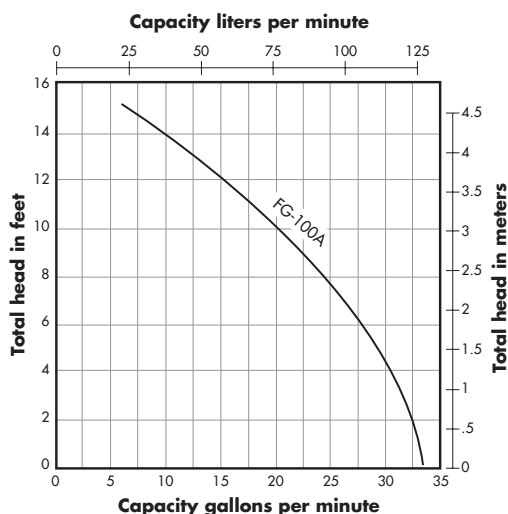

Typical Installation

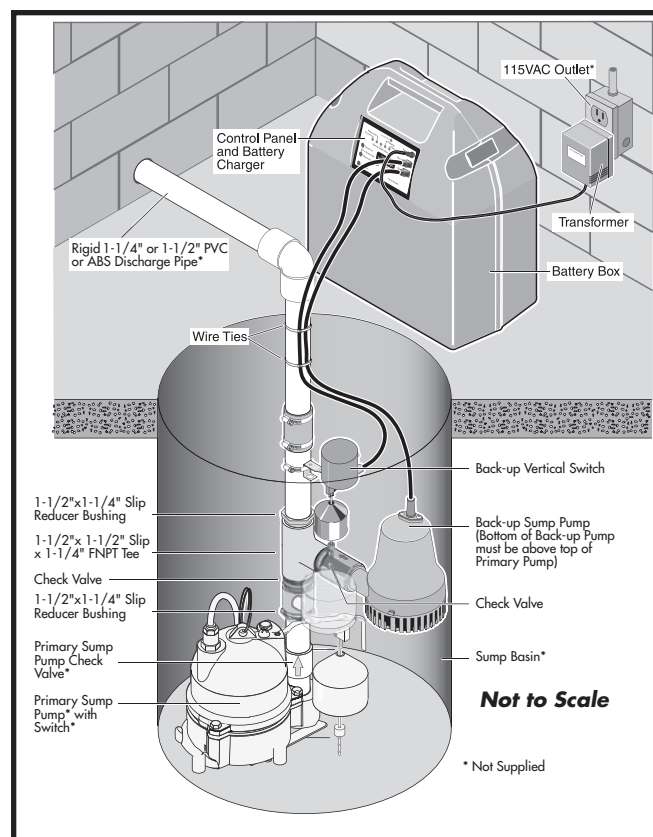

* Deep cycle marine-type battery (Group 24) recommended – not included with FG-100 system

– Your Authorized Local Distributor –



USA

740 East 9th Street, Ashland, Ohio 44805
Tel: 1-888-957-8677 Fax: 419-281-4087

www.hydromatic.com

CANADA

269 Trillium Drive, Kitchener, Ontario, Canada N2G 4W5
Tel: 519-896-2163 Fax: 519-896-6337