



Low Profile/Narrow Wrap LW Series

Features

This low profile, clean appearance, surface mounted wrap provides a wide distribution of light with a clear prismatic lens or with a translucent smooth white diffuser. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to standard junction box (not included).

Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

Finish

Housing is finished in lighting grade white baked gloss enamel paint. Can be ordered with post-painted white metal end-plates. Add X199 to the end of the part number when ordering. (Ex. LW217R8X199)

Diffuser

Acrylic diffuser is .060" thick prismatic diamond pattern 12 on the face with linear prisms on the sides, or can be ordered in smooth white acrylic plastic. Diffuser rests in position on the continuous housing flange, it is removed by a lift and shift motion.

Electrical

This unit can be ordered in the following ballast options:

1. UL Listed, High Power Factor Instant-Start
Electronic Ballast 120-277V 50/60Hz AC (MV suffix).
2. UL Listed, Normal Power Factor Residential Grade Ballast
120V/60Hz (R8 suffix).

Lamping

The following lamping options are available, lamps not included.

- (2) F17T8
- (2) F32T8
- (4) F32T8


Certification

cULus listed for damp locations.

Options (consult factory)

Dimming
Decorative end caps

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

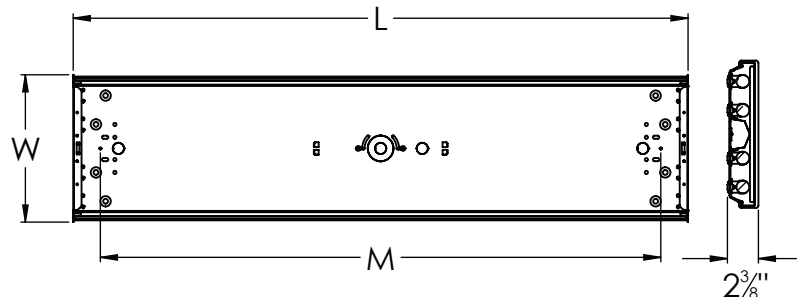

Lamp	L	W	D	M
2 - F17T8	24"	7"	2-3/8"	19-3/4"
2 - F32T8	48"	7"	2-3/8"	43-3/4"
4 - F32T8	48"	11-1/2"	2-3/8"	43-3/4"

Ordering Information for Low Profile/Narrow Wrap

Use guide below to order complete fixture. Example: LW232R8

LW					
Series	Lamp Qty.	Lamp Type	Lens	Ballast	Options
LW	2 = 2	17 = F17T8 ¹	Blank = Prismatic	MV = 120-277V Universal Voltage	Blank = (STD)
	4 = 4	32 = F32T8	WA = Smooth White	R8 = Residential T8	X199 = Post Painted White Metal Ends
Notes:					
¹ 2-lamp qty. only					

For photometric information, consult factory.
Specifications and dimensions subject to change without notice.