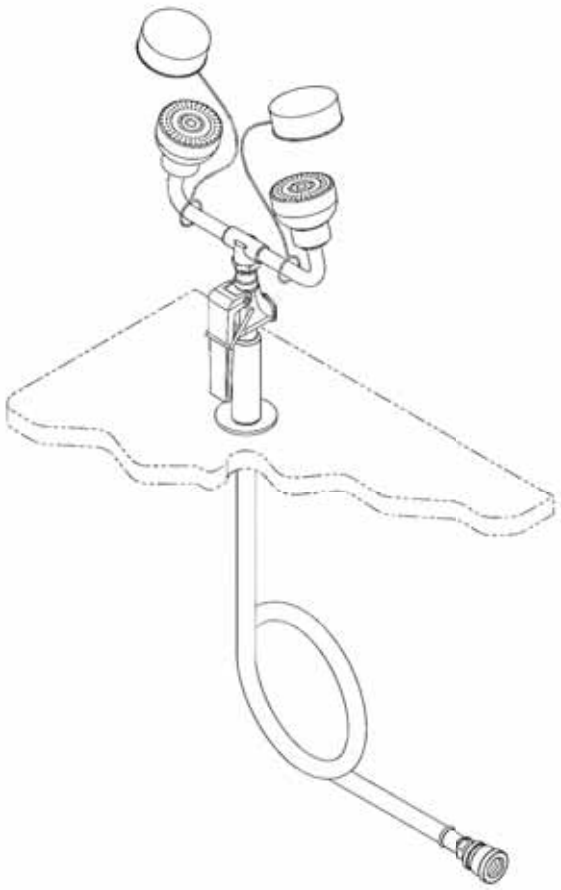


Installation

✔ S19-460EFW

Deck-Mounted Hand-Held Drench Hose and Eye/Face Wash

Douchette à boyau mobile avec douche oculaire/faciale pour dessus de comptoir

Manguera rociadora de mano con lavador de ojos/rostro para montaje sobre mostrador

Table of Contents

Pre-Installation Information 2
Installation Instructions 3
Assembly of Components 4
Parts List 4

Table des matières

Information avant l'installation 5
Instructions d'installation 6
Assemblage des composantes 7
Liste des pièces 7

Contenido

Información previa a la instalación 8
Instrucciones de instalación 9
Armado de los componentes 10
Lista de piezas 10

215-1165 Rev. N; EN 07-516

© 2007 Bradley Corporation

Bradley

P.O. Box 309, Menomonee Falls, WI USA 53052-0309
PHONE 1-800-BRADLEY FAX (262) 251-5817
http://www.bradleycorp.com

⚠ WARNING ⚠



Read this installation manual completely to ensure proper installation, then file it with the owner or maintenance department. Compliance and conformity to drain requirements and other local codes and ordinances is the responsibility of the installer.



Separate parts from packaging and make sure all parts are accounted for before discarding any packaging material. If any parts are missing, do not begin installation until you obtain the missing parts.



Flush the water supply lines before beginning installation and after installation is complete. Test the unit for leaks and adequate water flow. Main water supply to the eyewash should be "ON" at all times. Provisions shall be made to prevent unauthorized shutoff. Flushing fluid should be tepid per ANSI Z358.1.



The inspection and testing results of this equipment should be recorded weekly to verify proper operation. This equipment should be inspected annually to ensure compliance with ANSI Z358.1.



Workers who may come in contact with potentially hazardous materials should be trained regarding the placement and proper operation of emergency equipment per ANSI Z358.1.



For questions regarding the operation or installation of this product, visit www.bradleycorp.com or call 1-800-BRADLEY.

Product warranties may also be found under "Product Information" on our web site at www.bradleycorp.com.

Installation

Step 1: Prepare deck for installation

NOTE: Make sure that, when mounted, the eye wash unit will measure 33-45 inches from the top of the sprayheads to the finished floor. For usage as an eye/face wash, the top of the sprayheads of the S19-630 must be 33–45 inches from where the user stands per ANSI Z358.1. The unit must also be placed a minimum of 6" away from the nearest wall or obstruction.

1. Rough-in 1/2" IPS supply piping from wall where drench hose is desired (piping supplied by installer).
2. Select desired location in deck for drench hose and drill a 1-5/16" (34mm) diameter hole.
3. Install the drain plug using the washers and locknut provided (see Figure 2 and the parts list, page 4).

Step 2: Assemble eye/face body wash unit

1. Assemble the component parts as shown in Figure 2 on page 4.
   - Be sure to apply pipe sealant to all pipe joints.

Step 3: Connect water supply

1. Connect the water supply to the unit (piping supplied by installer).
2. Mount the safety sign to the wall using the sign-mounting hardware supplied by installer.
3. Open the water supply line. Test for leaks and adequate water flow.

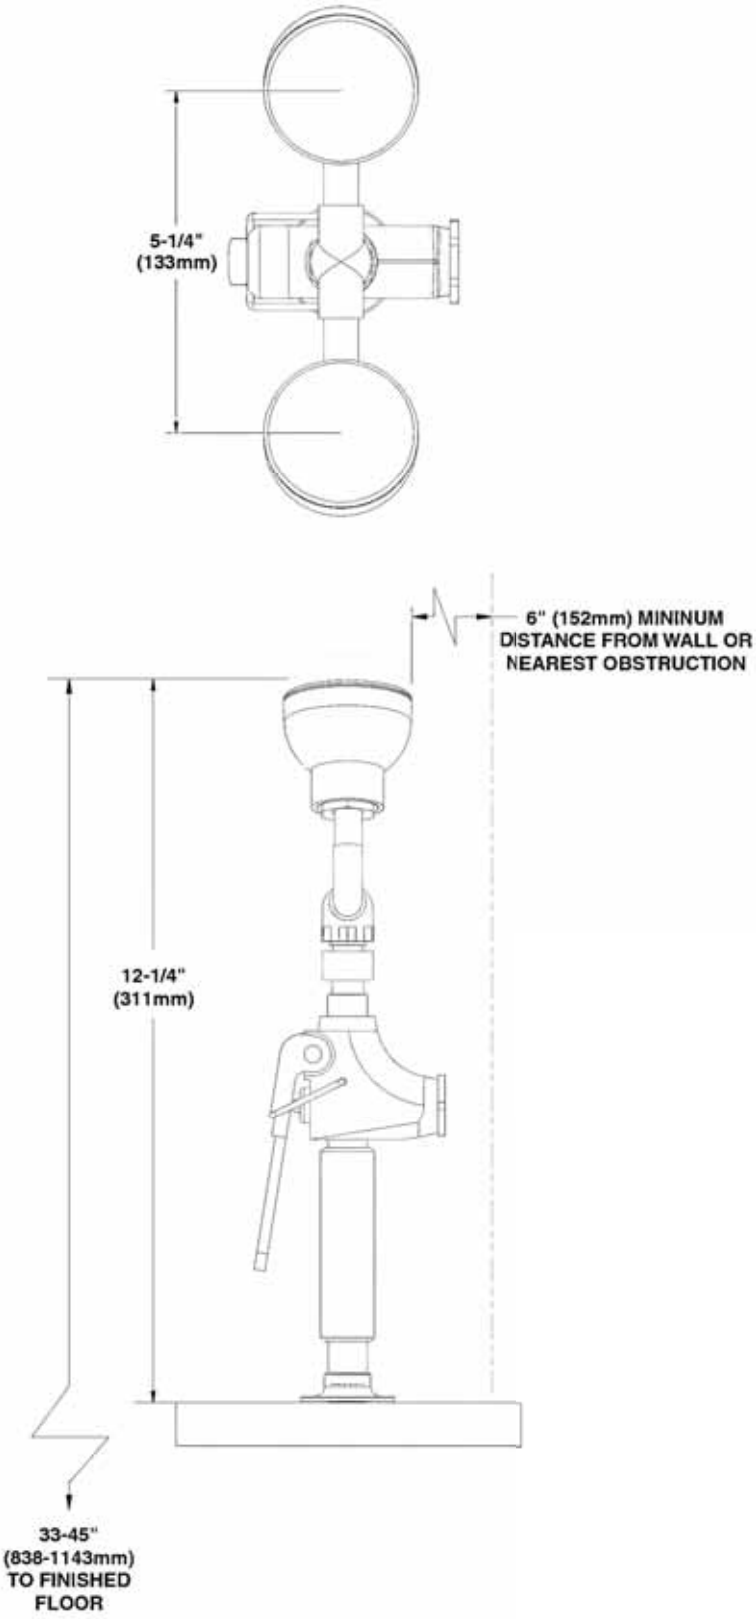


Figure 1

Assembly of Components and Parts List

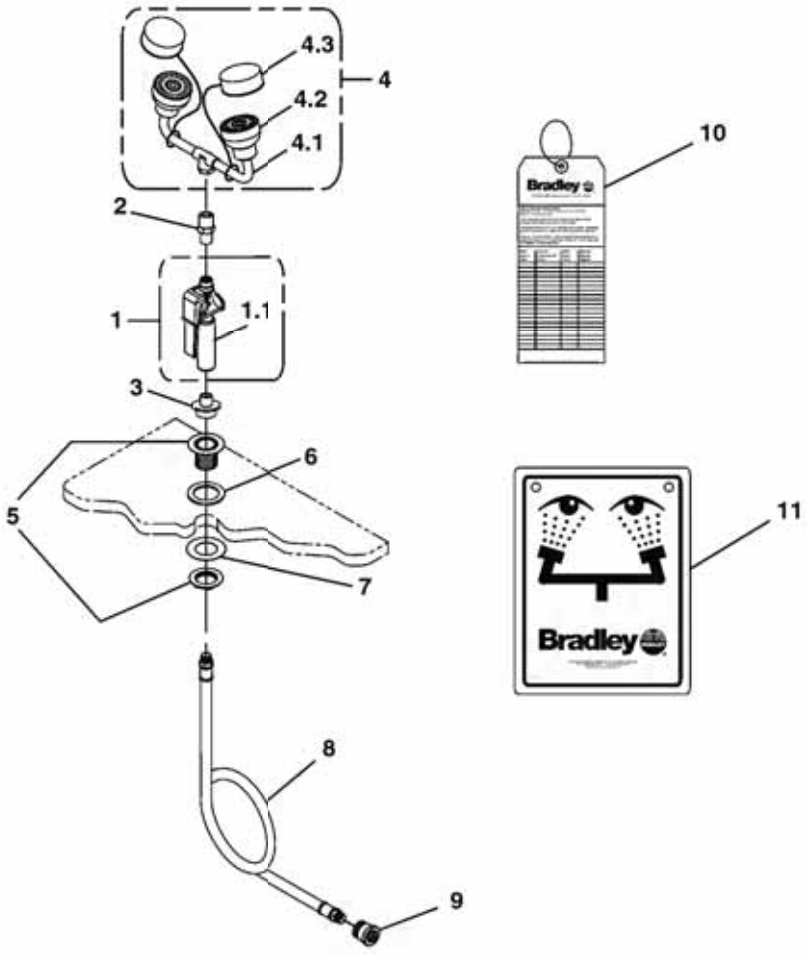


Figure 2

NOTE: Items 1–4 come preassembled.

Item	Part No.	Qty	Description
1	S27-265	1	Valve Assembly
1.1	269-661	1	Valve Handle only
2	153-337	1	Adapter
3	153-380	1	Adapter
4	S05-064D	1	EFW Assembly
4.1	S05-091P	1	EFW Yoke Assembly
4.2	S05-135	2	Sprayhead
4.3	S53-063	2	Dust Cover

Item	Part No.	Qty	Description
5	S29-092	1	Drain Flange Assembly
6	125-001CE	1	Washer, Rubber
7	169-875	1	Washer
8	S89-002	1	3/8" Yellow Tube
9	169-059	1	Reducing Coupling
10	204-421	1	Emergency Tag
11	114-051	1	Safety Sign