

CONDENSATE FUNNEL

» 863 SERIES

SPECIFICATION

Sioux Chief 863 Series condensate funnel shall be used where necessary on floor drains. Funnel shall be designed to receive drips, condensate lines or waste water from indirect waste lines. Funnel shall prevent splashing and direct waste into floor drain. Funnel shall be tapped and attach from underside of strainer with two concealed screws which fit through wiers in strainer to create a vandal-resistant installation.

MATERIALS

Funnel: nickel-bronze, aluminum

Screws: stainless steel, washer-head

INSTALLATION

Funnel is tapped to accept the two included fastening screws. Secure from underside of strainer for a vandal-resistant installation.

CONNECTION TYPE

Cast iron no-hub

DIMENSIONS

	Round	Oval
A: overall height	4"	4"
B: top outside diameter	4 ⁵ / ₁₆ "	9 ¹ / ₈ " × 2 ²¹ / ₃₂ "
C: top inside diameter	4"	8 ⁵ / ₈ " × 3 ⁵ / ₃₂ "
D: bottom inside diameter	2"	2" × 4 ¹ / ₂ "


ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____




863-FA



863-FNO

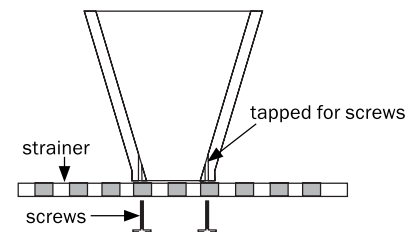

863-FN installation

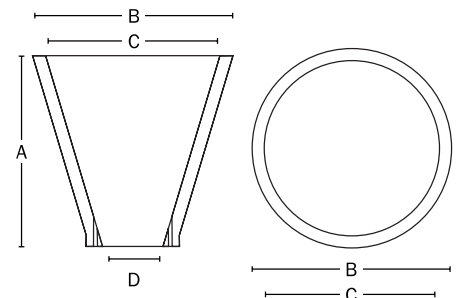

Create Item Number

868-A

e.g. **868-D1504**: combination roof drain and overflow drain with 4" cast iron no-hub connection

FUNNEL TYPE A

FA = round pattern, aluminum

FN = round pattern, nickel-bronze

FNO = oval pattern, nickel-bronze