


Submittal Data

PROJECT:	UNIT TAG:	QUANTITY:
REPRESENTATIVE: _____	TYPE OF SERVICE:	DATE: _____
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:
	ORDER NO.:	DATE:




22 SQE10-160

Submersible pumps with variable speed motor

Note! Product picture may differ from actual product

Conditions of Service	Pump Data	Motor Data
Liquid: Water	Liquid temperature range: 32 .. 95 °F	Rated voltage: 200-240 V
Temperature: 68 °F	Product number: On request	Mains frequency: 60 Hz
Specific Gravity: 1.000		Enclosure class: IP68
		Insulation class: F
		Motor protection: Y
		Thermal protection: INT
		Motor type: MSE3

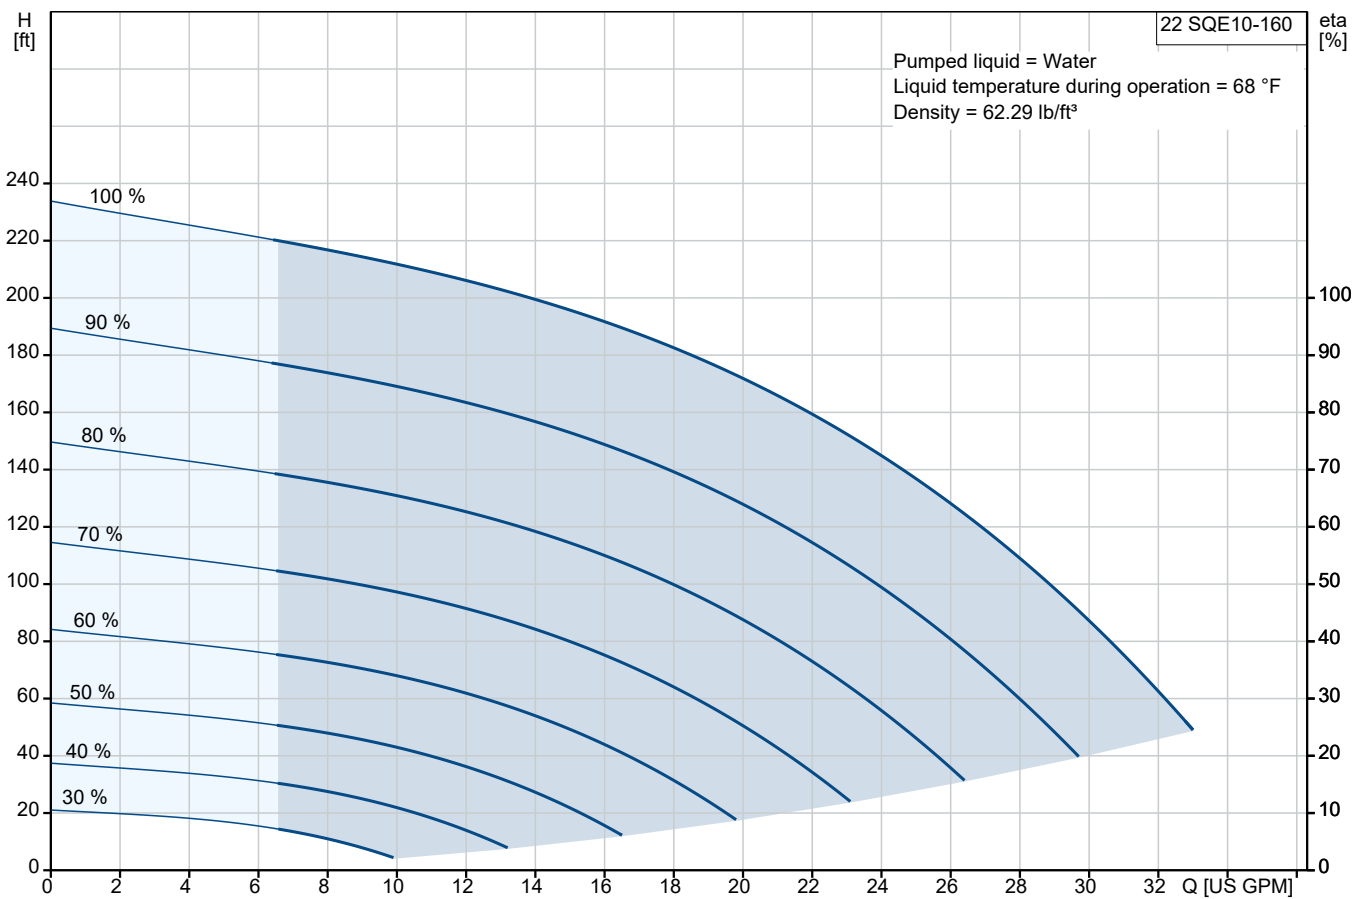

Submittal Data

Materials:

Impeller: Composite

Motor: Stainless steel

Motor: DIN W.-Nr. 1.4301

Motor: AISI 304

Qty.	Description
------	-------------

1	22 SQE10-160
---	---------------------



Note! Product picture may differ from actual product

Product No.: On request

3" multi-stage, submersible pump designed for domestic water supply, liquid transfer in tanks, irrigation and environmental applications. The pump has "floating" impellers, each with its own tungsten carbide/ceramic bearing.

The pump features soft starting and protection against dry-running, upthrust, overvoltage, undervoltage, overload and overtemperature.

The motor is a single-phase motor of the permanent magnet rotor type ensuring optimum efficiency within a wide load range.

The motor is fitted with a replaceable end cover with socket.

Liquid:

Pumped liquid:	Water
Liquid temperature range:	32 .. 95 °F
Selected liquid temperature:	68 °F
Density:	62.29 lb/ft³

Technical:

Pump speed on which pump data are based:	10700 rpm
Rated flow:	22 US GPM
Rated head:	157.5 ft
Approvals:	cULus
Curve tolerance:	ISO9906:2012 3B

Materials:

Pump:	Stainless steel EN 1.4301 AISI 304
Impeller:	Composite ZYTEL 70G30 HSLR PA6.6-GF30
Motor:	Stainless steel DIN W.-Nr. 1.4301 AISI 304

Installation:

Maximum operating pressure:	217.56 psi
Pump outlet:	1 1/2"NPT
Minimum borehole diameter:	2.99 in

Electrical data:

Motor type:	MSE3
Power input - P1:	2.05 kW
Rated power - P2:	2.08 HP
Power (P2) required by pump:	2.28 HP
Mains frequency:	60 Hz



Company name:

Created by:


Phone:

Date:



19/08/2024

Qty.	Description
1	<div><div><div>Rated voltage:</div><div>Service factor:</div><div>Rated current:</div><div>Power factor:</div><div>Rated speed:</div><div>Start. method:</div><div>Enclosure class (IEC 34-5):</div><div>Insulation class (IEC 85):</div><div>Length of cable:</div><div>Motor No:</div></div><div><div>1 x 200-240 V</div><div>2.07</div><div>11.2 A</div><div>1.00</div><div>10700 rpm</div><div>DOL</div><div>IP68</div><div>F</div><div>4.92 ft</div><div>96160541</div></div></div> <div><div>Others:</div><div>Net weight:</div><div>Gross weight:</div><div>Country of origin:</div><div>Custom tariff no.:</div></div> <div><div></div><div>13.5 lb</div><div>15 lb</div><div>MX</div><div>8413.70.2004</div></div>

On request 22 SQE10-160 60 Hz

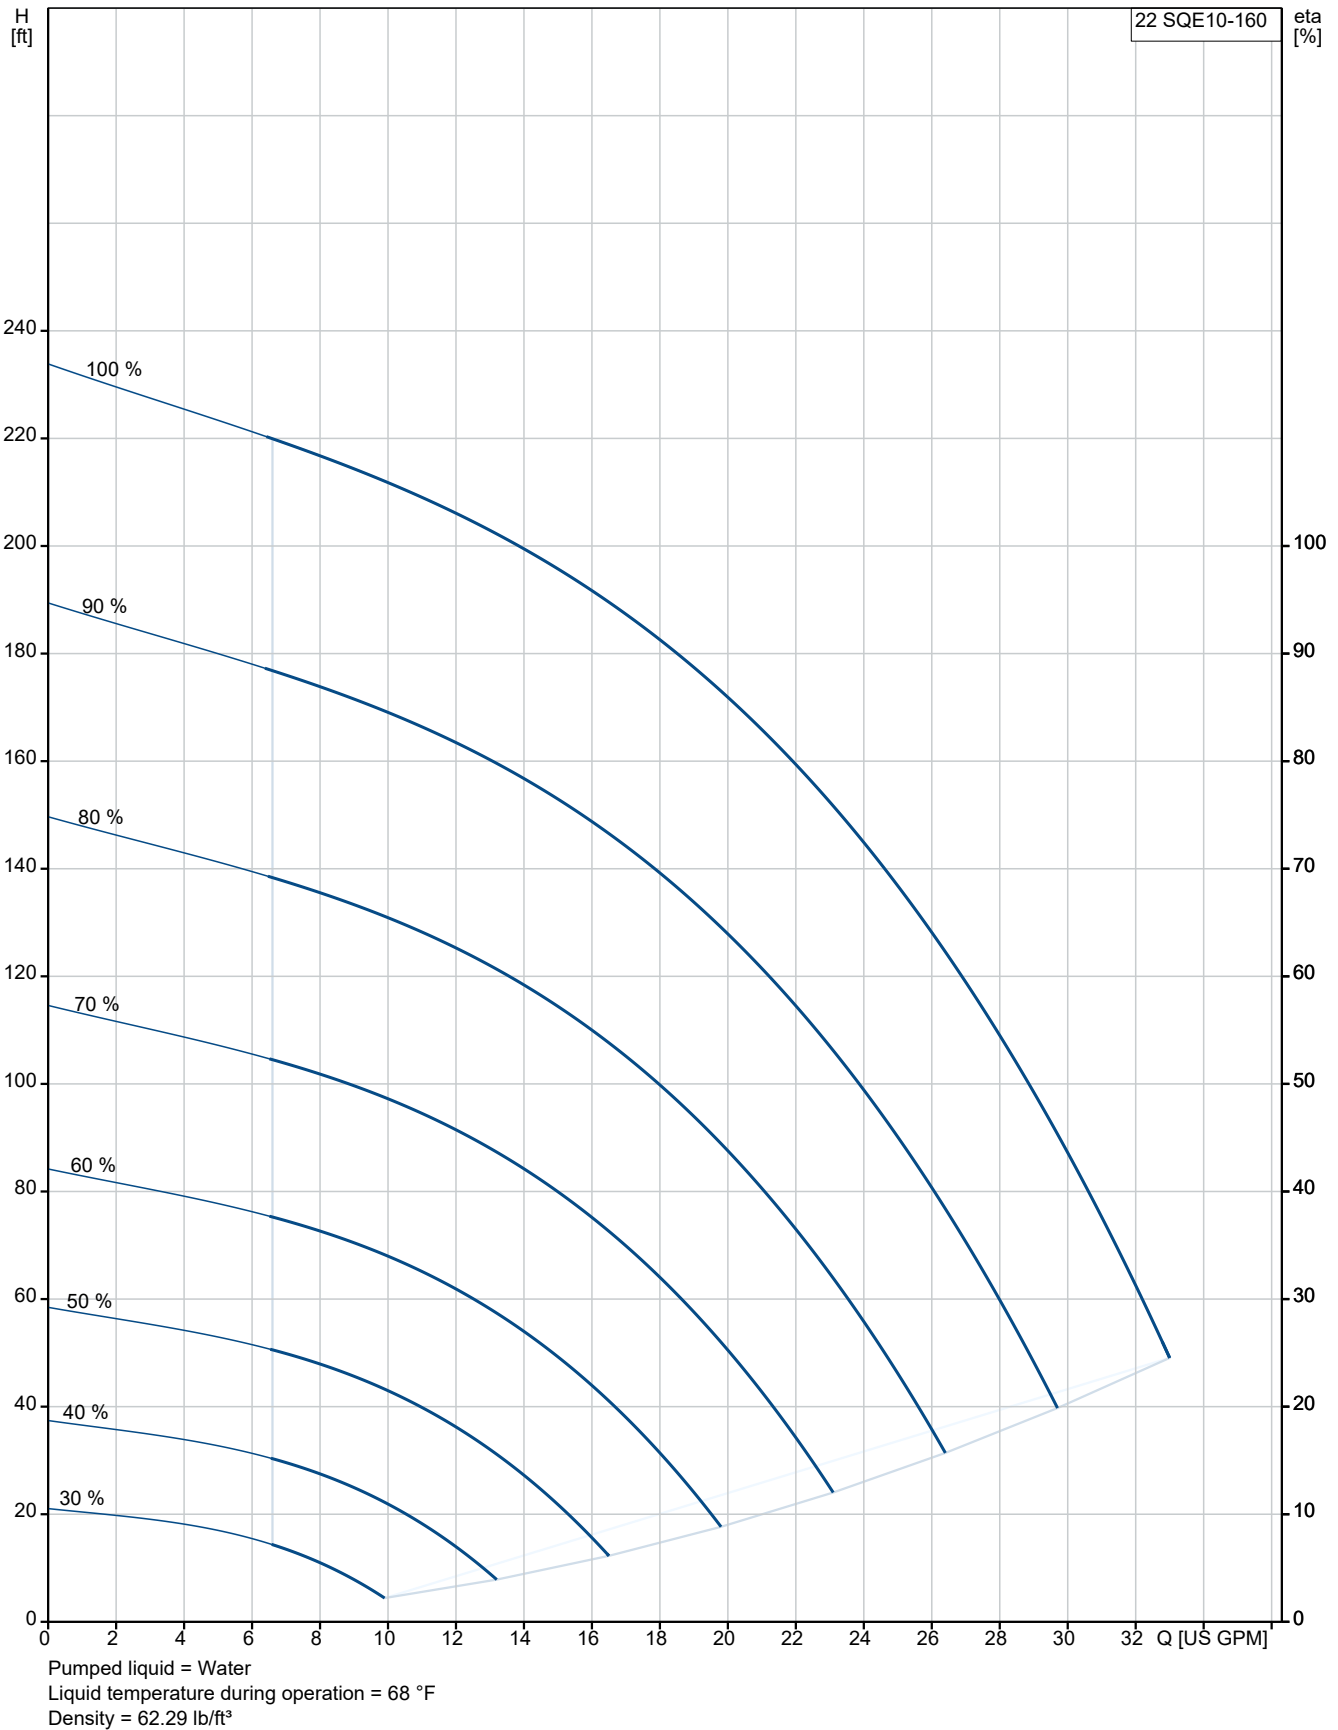

Description	Value
General information:	
Product name:	22 SQE10-160
Product No:	On request
EAN number:	On request
Technical:	
Pump speed on which pump data are based:	10700 rpm
Rated flow:	22 US GPM
Rated head:	157.5 ft
Stages:	4
Approvals:	cULus
Curve tolerance:	ISO9906:2012 3B
Pump No:	96397426
Model:	B
Valve:	Y
Materials:	
Pump:	Stainless steel
Pump:	EN 1.4301
Pump:	AISI 304
Impeller:	Composite
Impeller:	ZYTEL 70G30 HSLR PA6.6-GF30
Motor:	Stainless steel
Motor:	DIN W.-Nr. 1.4301
Motor:	AISI 304
Installation:	
Maximum operating pressure:	217.56 psi
Pump outlet:	1 1/2"NPT
Minimum borehole diameter:	2.99 in
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	32 .. 95 °F
Selected liquid temperature:	68 °F
Density:	62.29 lb/ft³
Electrical data:	
Motor type:	MSE3
Power input - P1:	2.05 kW
Rated power - P2:	2.08 HP
Power (P2) required by pump:	2.28 HP
Mains frequency:	60 Hz
Rated voltage:	1 x 200-240 V
Service factor:	2.07
Rated current:	11.2 A
Power factor:	1.00
Rated speed:	10700 rpm
Start. method:	DOL
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	Y
Thermal protec:	INT
Length of cable:	4.92 ft
Motor No:	96160541
Controls:	
CU 300/CU 301:	Y
Others:	
Net weight:	13.5 lb
Gross weight:	15 lb
Sales region:	Namreg

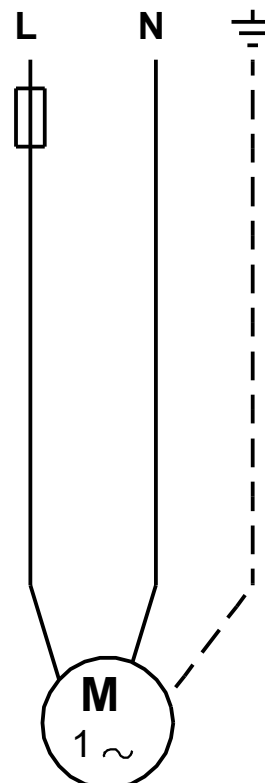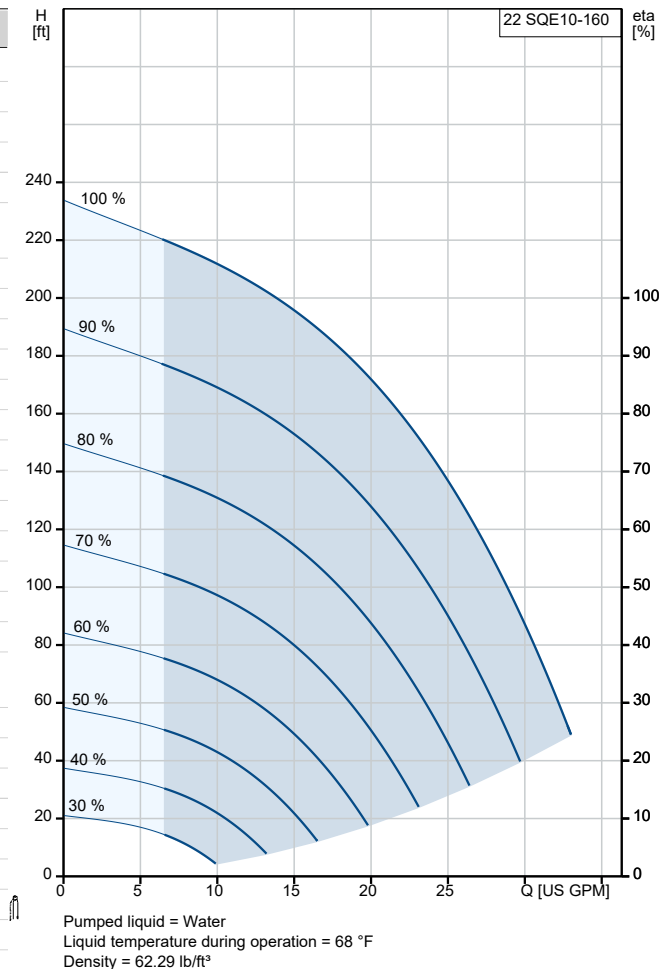



Company name:

Created by:


Phone:

Date:

19/08/2024

Description	Value
Country of origin:	MX
Custom tariff no.:	8413.70.2004

On request 22 SQE10-160 60 Hz

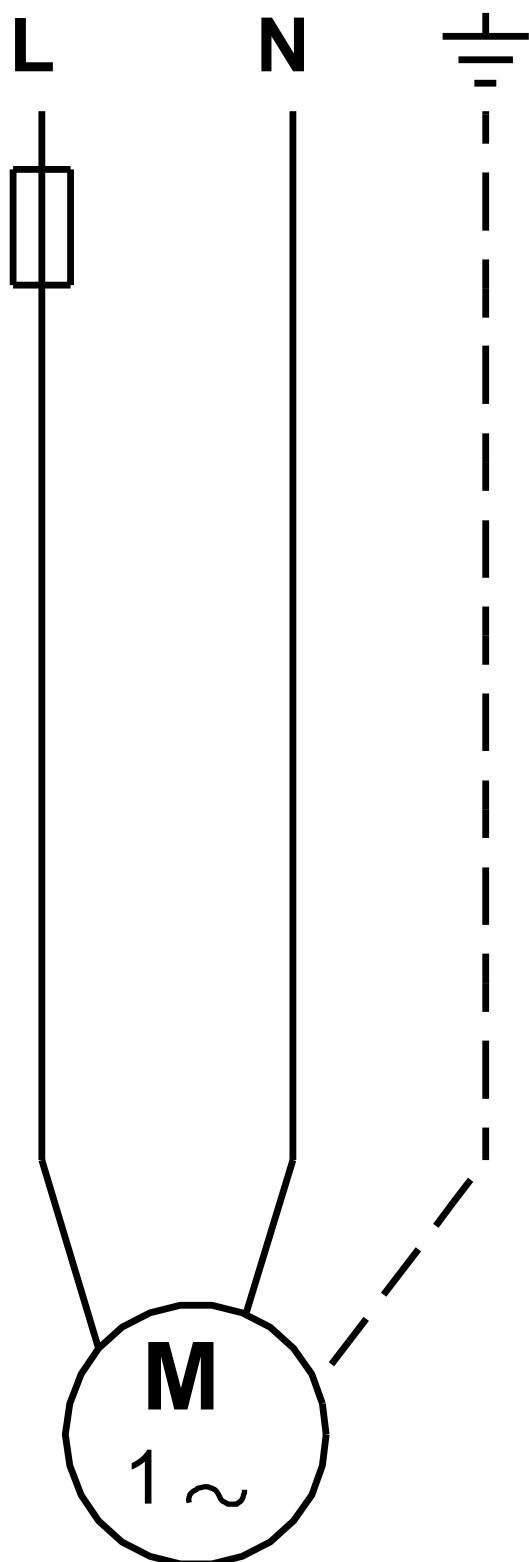

Note! All units are in [in] unless others are stated.

19/08/2024

Order Data:

Position	Your pos.	Product name	Amount	Product No	Total
		22 SQE10-160	1	On request	