




FD-100-A
Tag: _____

Floor Drain with Round Strainer

SPECIFICATION: Watts Drainage FD-100-A epoxy coated cast iron floor drain with anchor flange, reversible clamping collar with primary & secondary weepholes, adjustable round nickel bronze strainer, and no hub (standard) outlet.

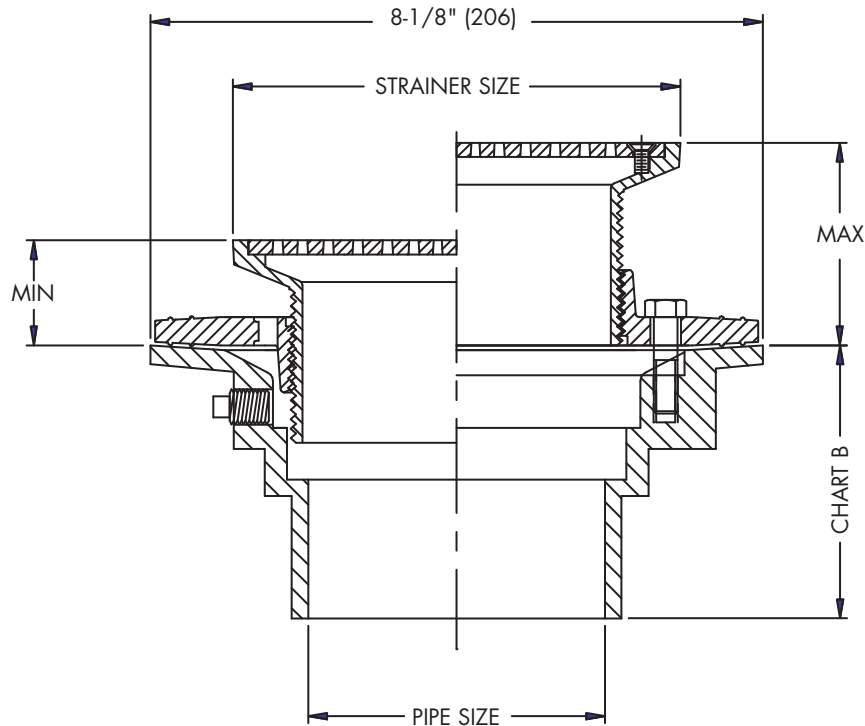


Strainer Size				
Str. Dia.	Min.	Max.	Load Rating	Free Area Sq. In.
5"(127)	13/16"(21)	3-1/4"(83)	*MD	8
6"(152)	7/8"(22)	3-3/8"(86)	*MD	9
7"(178)	11/16"(17)	3-1/4"(83)	*MD	12
8"(203)	7/8"(22)	3-1/4"(83)	*MD	18
10"(254)	1-1/4"(32)	3-1/4"(83)	*HD	28

* The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:
MD - Safe Live Load 2000-4999 lbs.(900-2250kg)
HD - Safe Live Load 5000-7499 lbs.(2250-3375kg)
The above categories are given as a guide only.
Please consult factory.

Chart B					
	Std.	P	T	X	60/61
Pipe Size	No Hub	Push On	Female Thread	Inside Caulk	PVC/ABS
2"(51)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/2"(114)	4"(102)
3"(76)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/2"(114)	4"(102)
4"(102)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/2"(114)	4"(102)
6"(152)	3-1/2"(89)				

Components



Pipe Sizing (Select One)

Suffix	Description	
2	2"(51) Pipe Size	☐
3	3"(76) Pipe Size	☐
4	4"(102) Pipe Size	☐
6	6"(152) No Hub Only	☐

Outlet Type (Select One)

Suffix	Description	
NH	No Hub (MJ)	☐
P	Push On	☐
T	Threaded Outlet	☐
X	Inside Caulk	☐

Strainer (Select One)

Suffix	Description	
A5	5"(127) Diameter, Nickel Bronze	☐
A6	6"(152) Diameter, Nickel Bronze	☐
A7	7"(178) Diameter, Nickel Bronze	☐
A8	8"(203) Diameter, Nickel Bronze	☐
A10	10"(254) Diameter, Nickel Bronze	☐

Options (Select One or More)

Suffix	Description	
-5	Sediment Bucket	☐
-6	Vandal Proof	☐
-7	Trap Primer Tapping	☐
-8	Backwater Valve (2", 3", 4" Only)	☐
-13	Galvanized Body	☐
-15	Strainer Extension (DD-50)	☐
-F4-50	4" Round Cast Iron Funnel	☐
-F4-1	4" Round Nickel Bronze Funnel	☐
-F6-1	6" Round Nickel Bronze Funnel	☐
-G-50	4x9" Oval Cast Iron Funnel	☐
-G-1	4x9" Oval Nickel Bronze Funnel	☐
-SO	Side Outlet	☐
-US	Buy American Compliant	☐

Optional Body Material

Suffix	Description	
-60	PVC Body w/Socket Outlet	☐
-61	ABS Body w/Socket Outlet	☐

Job Name _____ Contractor _____

Job Location _____ Contractor's P.O. No. _____

Engineer _____ Representative _____

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



Specification Drainage Products

USA: 100 Watts Road, Spindale, NC, 28160-2298; TEL: 828-288-2179 TOLL-FREE: 1-800-338-2581 www.watts.com